Single surface-mounted mailbox BASIC Plus 382X AP with side-mounted doorbell box - RAL colour of your choice | Left | 100mm depth | ? Colour of your choice | with 1 mailbox



Product number 382XA-1W-SP-RAL-100-L

Product description

Single surface-mounted mailbox BASIC Plus 382X AP with side bell box - RAL colour of choice

German quality manufacturing "Made in Germany" by Briefkasten Manufaktur. The complete surface-mounted mailbox is made of weather-resistant stainless steel V2A, powder-coated in RAL colour. A rain drip edge for optimal water protection, a double-folded insertion flap with rubber buffer, a solid interchangeable nameplate, a practical mail-retention bracket and a very robust lock characterise this stainless-steel mailbox.

The mailbox systems of the BASIC Plus collection are distinguished by the consistent use of stainless steel V2A. The result is very high durability and sustainability. The construction has been developed by our own engineers with a view to high flexibility and modularity, easy spare-part installation and straightforward self-assembly.

Spare parts are directly available for all BASIC Plus systems. Single surface-mounted mailbox made from high-quality, weather-resistant stainless steel V2A 1.4301, powder-coated in RAL colour.

Benefits at a glance

Close-fitting stainless-steel cladding with rain canopy

Side cladding and rain canopy are included in this version and are made of stainless steel V2A, powder-coated in RAL colour. The close-fitting design forms a closed, constructively coordinated unit with the mailbox system.

Generous mail slot

The insertion opening measures 35 × 325 mm and is designed for DIN C4 (landscape). The mailbox version complies with DIN EN 13724.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Quiet insertion and comfortable removal

The integrated flap damping with rubber buffer reduces impact noise during insertion. The mail-retention bracket holds items back during removal.

Integrated bell and intercom area

Bell box made of stainless steel V2A 1.4301, powder-coated in RAL colour. The stainless-steel bell button Type 4 is used. Optionally prepared with a speaking grille for the installation of commercially available two-way intercom systems or built-in loudspeakers. (Two-way intercom system/built-in loudspeaker not included). An alternative version with Comelit Ultra video complete set is also available as an option.

Quality manufacturing and well-thought-out design

The system is manufactured at Briefkasten Manufaktur in Germany. The construction is designed for straightforward self-assembly.

Equipment and product details

Mailbox system

Number of mailboxes 1 separately usable mail compartment
Depth 100 mm
Mailbox material Stainless steel V2A 1.4301
Mailbox finish Powder-coated in RAL colour of choice
Bell/intercom section Bell box made of stainless steel V2A 1.4301, powder-coated in RAL colour

Mail and operation

Insertion opening 35 × 325 mm, suitable for DIN C4 (landscape)
Standard DIN EN 13724
Insertion flap Noise-dampened with rubber buffer
Keys 2 keys with key number per mailbox
Nameplate Interchangeable nameplate below the insertion flap
Mail-retention bracket Integrated per mailbox

Mounting and equipment

Mounting type Surface-mounted
Rain drip edge Integrated into the construction
Rain canopy Made of stainless steel V2A, powder-coated in RAL colour of choice
Side cladding Made of stainless steel V2A, powder-coated in RAL colour of choice
Mounting material For wall mounting incl. fixings
Manufacture Made in Germany by Briefkasten Manufaktur Lippe

Note on weather protection

Mail items are best protected from moisture and dirt when fully inserted and the insertion flap is closed. Protruding items can prevent the flap from closing completely.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Note on wall mounting

Before mounting, the load-bearing capacity and condition of the wall must be checked. The fixing must be adapted to the system weight and the existing wall structure.

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	BASIC
Number of bell push buttons	1 button, 2 buttons, 3 buttons
Functions	Light button, Intercom
Functional box prepared for manufacturer	GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, Comelit
Boxes by volume	Normal > 10 litres
Name labelling	Nameplate
Material	Stainless steel V2A 1.4301
House number	House number as laser engraving
Removal of mail	On the front
Number of boxes	with 1 letterbox
Mounting type	Surface-mounted

Dimensions

Height of single box in mm	330.0
Width of single box in mm	355.0
Capacity in litres	12.0 | 17.0
Height of letterbox slot in mm	35.0
Width of letter slot in mm	325.0
Height of letterbox in mm	330.0
Width of letterbox system in mm	525.0
Total width in mm	525.0
Depth in mm	100.0 | 150.0
Weight in kg	12


Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images



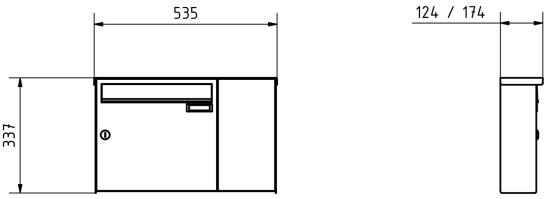





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618







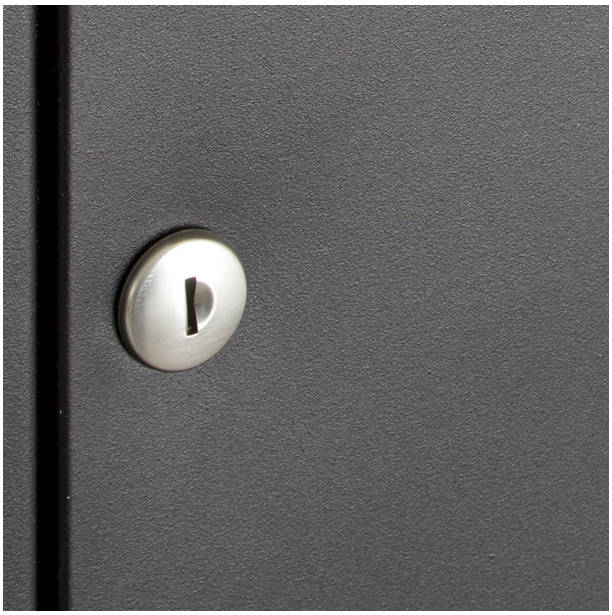

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618