Design surface-mounted large-capacity letterbox GOETHE AP - RAL colour of your choice - GIRA System 106 - VIDEO complete set | without newspaper compartment | 200mm depth | Gira System 106 Complete Video Set 2DB



Product number 215-AP-1-SP-KSGI106-200

Product description

Design surface-mounted large-capacity letterbox GOETHE® AP - RAL colour of choice - GIRA System 106 - VIDEO complete set

High-quality surface-mounted letterbox with seamlessly integrated Gira System 106 in a flush-mounted design. The modern GOETHE® letterbox is ideal for a discerning entrance area. The linear design without a visible lock gives this letterbox a particularly elegant appearance. 3 GIRA System modules are included, so the letterbox can be used immediately. The matching GIRA apartment station and the control unit to complete this letterbox are included. The modules can be exchanged at any time thanks to the simple retaining system.

The dimensions of the individual box provide a capacity of approx. 32 litres; the large slot guarantees that even DIN-C4 envelopes and magazines — or post after several days' absence — will not be creased. The innovative push-key lock is concealed invisibly inside the letterbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the position of the lock, this letterbox is designed so that the access door prevents your post from falling out towards you. Thanks to the water run-off edge, the interior mail is optimally protected from the weather. The letter flap is fitted with high-quality axle dampers, ensuring a quiet closing and preventing annoying rattling caused by the weather.

The surface-mounted letterbox systems of the GOETHE® collection are characterised by the consistent use of stainless steel and aluminium. The result is very high durability and sustainability. The construction has been developed by our own engineers with a view to high flexibility and modularity, easy spare-part installation and straightforward self-installation. Spare parts for all GOETHE® systems are available directly in our shop.

Thanks to the construction, self-installation is uncomplicated.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- High-quality surface-mounted letterbox made of stainless steel and aluminium.
- Quality manufacturing - Made in Germany by Briefkasten Manufaktur Lippe.
- Letterbox (BH 400x400mm) made of stainless steel 1.4016 (corrosion-resistant magnetic stainless steel), powder-coated in RAL colour of your choice.
- Innovative push-key lock with 2 keys.
- Letters are inserted and retrieved from the front. Letter flap with high-quality axle dampers for very quiet insertion of mail.
- The letterbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 landscape; large letters fit in without being creased.
- Access door opens from top to bottom. This prevents the mail from falling out towards you.
- Function box (BH 400x200mm) made of stainless steel 1.4016 (corrosion-resistant magnetic stainless steel), powder-coated in RAL colour of your choice.
- Name plate made of stainless steel, powder-coated in the chosen RAL colour. Your name and/or a bell can optionally be laser-engraved on the name plate.
- Optionally with house number, laser-engraved (a name inscription can also be stored here).
- Optimal protection against rain via rain runoff edges and a rain hood made of 3 mm aluminium AlMg3 W19, powder-coated in RAL colour of your choice.
- Side cladding made of 3 mm aluminium AlMg3 W19, powder-coated in RAL colour of your choice.
- Incl. mounting rail for wall mounting.
- Incl. GIRA apartment station & control unit supplied, System 106 door station module, info module & camera module installed.

GIRA

Camera module Gira System 106 - 5561 000, installed without cabling

- Behind the interchangeable black glass pane is a high-quality camera with high light sensitivity. With a detection angle of 100° the user is always informed about what is happening at their front door.

Info module Gira System 106 - 5560 920, installed

- For house numbers that should be prominently displayed.

Door station module Gira System 106 - 5565 920, installed without cabling

- Compact voice module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good intelligibility.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. required from the 3rd camera module).
- All other System 106 modules (except the voice module) are supplied with power via the door station module.

Apartment station Gira Video AP 7 1209xx, supplied

- Video apartment station with a 17.78 cm (7") TFT colour display and comfortable hands-free function for surface-mounted or wall mounting with flush-mount device box or hollow-wall box. With the optional stand (see Accessories) also suitable for placement on furniture. A 32 GB SD memory card is included for internal image storage. Full-surface glass front with touch functionality and tactile feedback.

Video control unit REG Gira 128800, supplied

- Control unit for powering the audio and video components of the Gira door communication bus.
- Supplies the reverse-polarity protected and short-circuit-proof 2-wire bus when video components such as colour camera and TFT colour display are used.
- Up to 2 door stations with colour camera and 28 apartment stations with TFT colour display can be supplied via the Video control unit.
- In total, up to 15 colour cameras can be controlled by the Video control unit (5 video door stations and 10 TKS camera gateways), of which two door stations with colour camera can be powered by the Video control unit. The additional colour cameras must each be operated with their own power supply for door communication.
- Self-resetting electronic short-circuit and overload detection of the operating voltages and the bus connection.
- Buttons for system and door opener programming.
- LED status indicators for operation, overload, system programming and door opener programming.
- 12 V AC output for powering a conventional door opener.
- Relay output for switching a door opener with its own power supply.
- Door opener switching time continuously adjustable from 1 to 10 s.

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. For planning, installation and commissioning, please consult the electrician you trust.

Water protection

To achieve optimal protection of your post from water, the letterbox or letterbox system should, if possible, be located under a canopy.

Mail items are only protected from water if they are placed completely inside the box and the letter flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the letterbox. This installation is protected against water ingress according to DIN EN 13724. Water ingress is not a valid reason for complaint.

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Camera, Intercom
Functional box prepared for manufacturer	GIRA
Material	Aluminium AlMg3 W19, Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Jumbo > 30 litres
Mounting type	Surface-mounted

Dimensions


Height of single box in mm	400.0
Width of single box in mm	400.0
Capacity in litres	32
Height of letterbox slot in mm	35.0
Width of letter slot in mm	360.0
Height of letterbox in mm	600.0
Width of letterbox system in mm	400.0
Total width in mm	408.0
Depth in mm	200.0 + 25.0 rain hood
Weight in kg	19
Delivery condition	Delivered assembled

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110


Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images

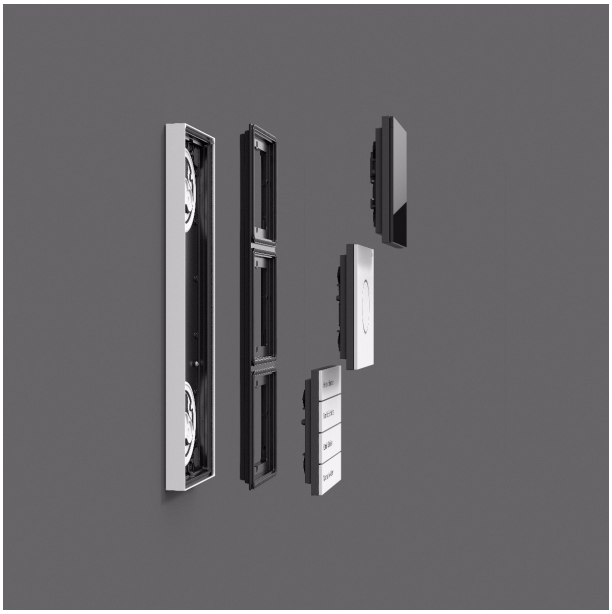





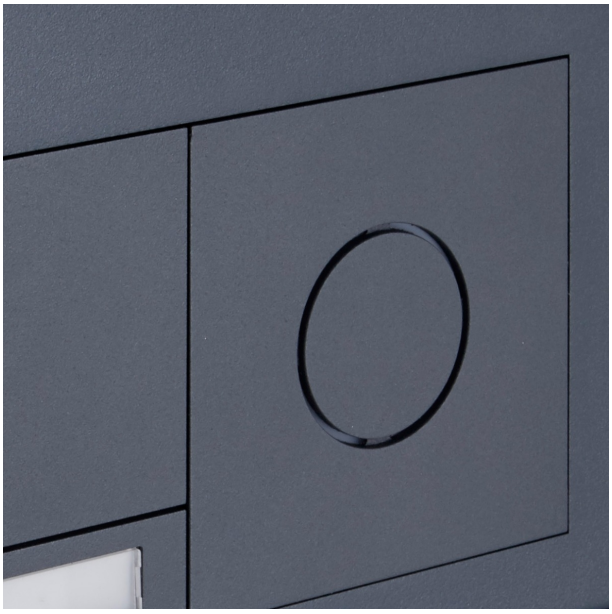


Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618



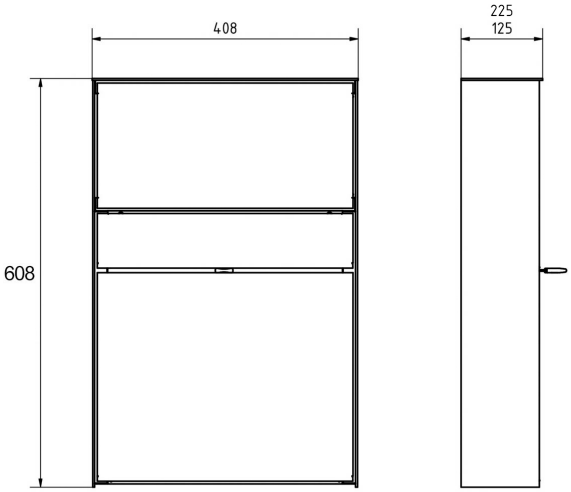





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618