5-unit freestanding mailbox Design BASIC 385P-9016 ST-T with doorbell box - RAL 9016 traffic white | RAL 9016 Traffic White, fine-textured matt | Top | with 5 mailboxes



Product number 385P-9016-5-SP

Product description

Freestanding mailbox system BASIC 385P with bell/intercom module for 5 households – RAL 9016 Traffic White

The freestanding BASIC 385P mailbox system for 5 households combines 5 separately usable mail compartments with an integrated bell function box. This brings together mail reception, doorbell buttons and provision for a compatible door intercom in a robust, visually unified entrance solution for apartment buildings, smaller residential complexes and commercial properties. The bell function box is integrated directly into the overall unit.

The mailboxes are made of galvanised steel and are matt powder-coated in RAL 9016 Traffic White fine texture. A close-fitting side cladding with rain hood and integrated rain gutters supports weather protection. The solid stand elements are manufactured from anodised aluminium profile, are also powder-coated in RAL 9016 Traffic White and form an especially stable, durable base for the freestanding system.

Each of the 5 mail compartments has approx. 12 litres volume. The 35 × 265 mm inlet is designed for DIN C4 items in portrait format. A noise-damping rubber lip reduces the impact of the flap. Mail is collected from the front; the collection doors open from left to right. Each mailbox is supplied with two numbered keys and a replaceable nameplate below the inlet flap.

The advantages of the BASIC 385P mailbox system at a glance

Integrated bell function box

The unit combines 5 mailboxes with 5 stainless steel bell push-buttons and a speaker aperture with universal adapter. This creates a central, tidy solution for mail and visitor communication.

Solid aluminium stand elements

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Solidly manufactured anodised aluminium profiles form the stable base of the freestanding unit. The powder-coated construction combines high load capacity with a durable finish for outdoor use.

DIN C4 inlet with 12 litres volume

Each mailbox offers approx. 12 litres of mail volume. The 35 × 265 mm inlet accepts DIN C4 items in portrait format without larger envelopes needing to be unnecessarily folded.

Prepared for door communication

The speaker aperture with universal adapter is prepared for many commercially available flush-mounted speakers.

Robust BASIC quality in RAL 9016 Traffic White

Galvanised steel, stainless steel components, solid aluminium stand elements and German manufacture result in a resilient mailbox system for long-term use at the property entrance.

Equipment of the BASIC 385P mailbox system

Mailbox system

Number of mailboxes 5 separately usable mail compartments
Mailbox dimensions 300 × 110 × 385 mm (W × H × D) per compartment
Mail volume Approx. 12 litres per mailbox
Material Galvanised steel; side cladding and rain hood in stainless steel V2A
Finish RAL 9016 Traffic White fine texture matt
Inlet opening 35 × 265 mm, suitable for DIN C4 portrait
Standard Mailboxes compliant with DIN EN 13724

Bell and intercom unit

Bell function box Galvanised steel, powder-coated to match
Position Integrated into the unit
Bell push-buttons 5 round stainless steel bell push-buttons, type 4
Speaker aperture With universal adapter for commercially available flush-mounted speakers
Nameplate Designed to be tamper-resistant and impact-resistant

Solid aluminium stand elements

Stand elements Solidly manufactured, anodised aluminium profile
Coating Powder-coated in RAL 9016 Traffic White
Installation methods Selectable as screw mounting or for concreting-in
Screw mounting Stand elements selectable in 1200 or 1600 mm
Concreting-in Stand elements selectable in 1600 or 2000 mm
Delivery condition Stand elements and mailbox system delivered in sections ready for assembly
Manufacture Made in Germany by Briefkasten Manufaktur Lippe

Note about the bell/intercom unit

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

The universal adapter is suitable for many commercially available flush-mounted speakers. The intercom system or speakers, power supply and cabling are not part of the described basic equipment and must be provided to suit the planned system.

Installation on a foundation

For screw mounting, a level and sufficiently load-bearing foundation is required. Fixings must be selected to suit the foundation, the weight of the unit and the local installation conditions.

Installation by concreting?in

For the concreting-in version, the extended aluminium stand elements are anchored vertically in a suitably dimensioned concrete foundation. Foundation size and embedment depth must be coordinated with ground conditions, unit dimensions and local loads.

Note on weather protection

The rain hood, close-fitting side cladding and integrated rain gutters support weather protection. Mail items must be fully inserted so that the inlet flaps can close completely. Under extreme weather conditions, small amounts of moisture may penetrate despite compliance with standards.

Product properties

Material	Steel, galvanised, Aluminium AlMg3 W19, Stainless steel V2A 1.4301
Series	BASIC
Number of bell push buttons	5 buttons
Functions	Light button, Intercom
Functional box prepared for manufacturer	GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, Comelit
Boxes by volume	Normal > 10 litres
Name labelling	Nameplate
Mounting type	Free-standing
Removal of mail	On the front
Number of boxes	with 5 letterboxes
Surface/colour	RAL 9016 traffic white

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions

Height of single box in mm	110.0
Width of single box in mm	300.0
Capacity in litres	12
Height of letterbox slot in mm	35.0
Width of letter slot in mm	265.0
Overall height in mm	1200.0 | 1600.0
Total width in mm	400.0
Depth in mm	435.0
Weight in kg	48
Delivery condition	Delivery is made in blocks; stand elements / mailbox are delivered in parts.


Dimension drawing

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Montagebohrungen

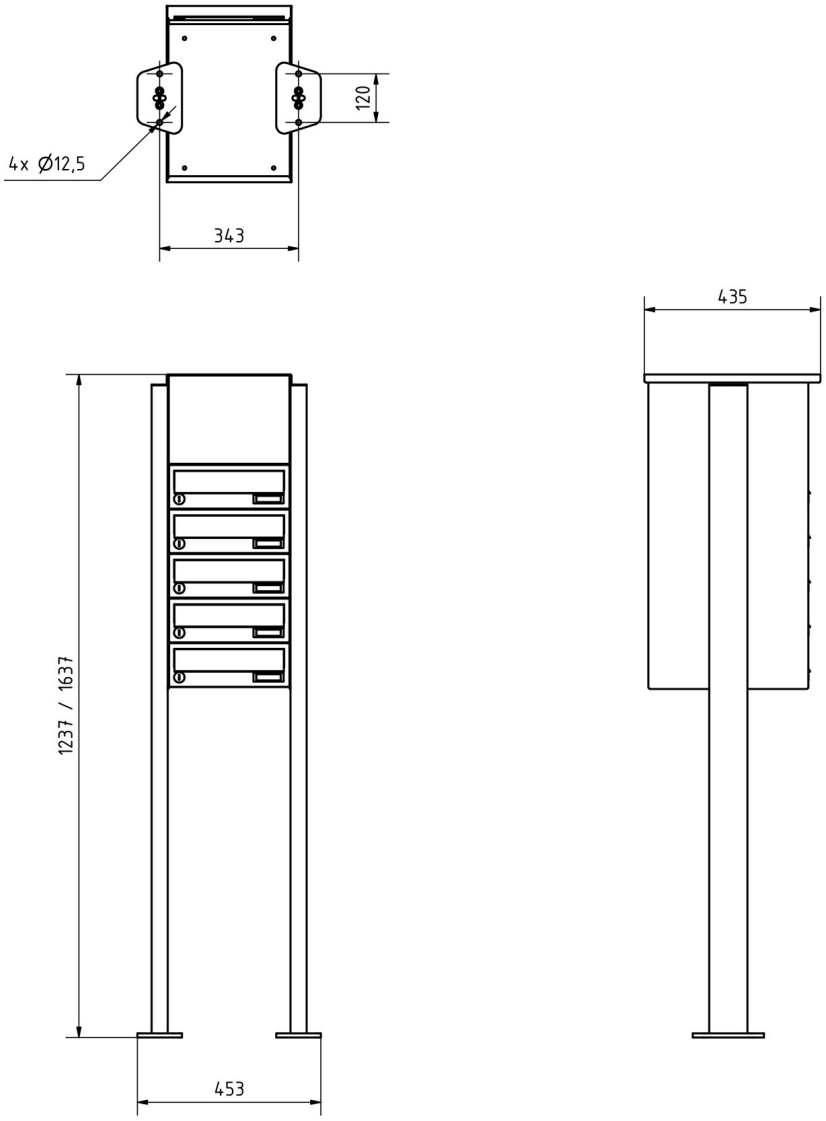

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images





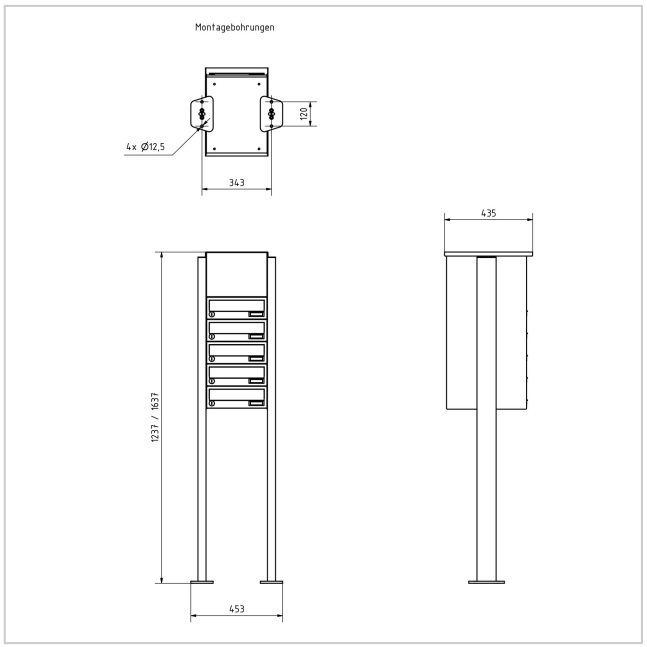



Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618