Design mailbox column GOETHE with newspaper compartment - RAL colour of your choice - GIRA System 106 - VIDEO complete set | Gira System 106 Complete Video Set 2DB



Product number 215-STL-160-1ZFSP-KSGI106

Product description

Design mailbox column GOETHE with newspaper compartment - RAL colour of your choice - GIRA System 106 - VIDEO complete set

High-quality manufactured mailbox column with newspaper compartment and seamlessly integrated Gira System 106 in a flush-mounted design. The modern GOETHE mailbox is ideal for an upscale entrance area. The clean-lined design without a visible lock gives this mailbox a particularly elegant appearance. 3 GIRA System modules are included, so the mailbox can be used immediately. The matching GIRA apartment station and the control unit to complete this mailbox are included. The modules can be exchanged later as required using the simple retention system.

The dimensions of the single box allow a capacity of approx. 16 litres; the large insertion slot guarantees that even DIN-C4 envelopes and magazines, or post accumulated during several days away, will not be creased. The innovative push-key lock is concealed invisibly inside the mailbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the position of the lock, this mailbox is designed so that the retrieval door prevents your post from falling out towards you. The internal mail is optimally protected from the weather by the water drainage edge. The insertion flap is equipped with high-quality hinge dampers, ensuring very quiet closing and preventing irritating rattling from weather influences.

The mailbox systems of the GOETHE collection are characterised by the consistent use of stainless steel and aluminium. The result is very high durability and sustainability. The construction has been developed by our own engineers with a view to high flexibility and modularity, simple spare parts assembly and straightforward self-installation. Spare parts for all GOETHE systems are available directly in our shop.

Thanks to the design, self-installation is uncomplicated.

Protected utility model according to DPMA file reference DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- High-quality mailbox column made of stainless steel and aluminium.
- Quality manufacture - Made in Germany by Briefkasten Manufaktur Lippe.
- Mailbox (BH 400x400mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Innovative push-key lock with 2 keys.
- Mail insertion and retrieval are from the front. Insertion flap with high-quality hinge dampers for very quiet insertion of mail.
- The mailbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 landscape; large letters fit in without being folded.
- The retrieval door opens from top to bottom, so your post cannot fall out towards you.
- Newspaper compartment (BH 400x200mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice with stainless steel laser engraving "ZEITUNG" (font ARIAL; if name/house number is selected, it will be engraved in your chosen font).
- Newspaper compartment opens from bottom to top.
- Function box (BH 400x200mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Nameplate made of stainless steel, powder-coated in the chosen RAL colour. Your name and/or a bell can optionally be laser-engraved on the nameplate.
- Optionally with laser-engraved house number (a name inscription can also be applied here).
- Optimal protection from rain thanks to rain drainage edges and a rain canopy made of 3 mm aluminium AlMg3 W19, powder-coated in RAL colour of your choice.
- Side panels made of 3 mm aluminium AlMg3 W19, powder-coated in RAL colour of your choice.
- Rear panel and base plate made of 6 mm aluminium AlMg3 W19, powder-coated in RAL colour of your choice.
- Invisible fixing in the column via reinforced base plate.
- Invisible cable entry through the body is possible. Overall height is 1.65 m.
- Incl. GIRA apartment station & control unit supplied, System 106 door station module, info module & camera module installed.

GIRA

Camera module Gira System 106 - 5561 000, fitted without cabling

- Behind the replaceable black glass pane is a high-quality camera with high light sensitivity. With a detection angle of 100°, the user always has a clear view of what is happening at the front door.

Info module Gira System 106 - 5560 920, fitted

- For house numbers or information that should be displayed clearly.

Door station module Gira System 106 - 5565 920, fitted without cabling

- Compact audio module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good intelligibility.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. required from the 3rd camera module).
- All other System 106 modules (except the audio module) are powered via the door station module.

Apartment station Gira Video AP 7 1209xx, included

- Video apartment station with a 17.78 cm (7") TFT colour display and convenient hands-free function for surface mounting or wall mounting with a flush-mounted device box or cavity wall box. With the optional stand (see Accessories) also suitable for placement on furniture. A 32 GB SD memory card is included for internal image storage. Full-surface glass front with touch functionality and tactile feedback.

Video control unit REG Gira 128800, included

- Control unit for supplying the audio and video components of the Gira door communication bus.
- Supply of the polarity-proof and short-circuit-proof 2-wire bus when using video components such as colour camera and TFT colour display.
- Up to 2 door stations with colour camera and 28 apartment stations with TFT colour display can be supplied via the video control unit.
- A total of up to 15 colour cameras can be controlled by the video control unit (5 video door stations and 10 TKS camera gateways), of which two door stations with colour camera can be powered by the video control unit. The remaining colour cameras must each be operated with their own power supply for door communication.
- Self-resetting electronic short-circuit and overload detection of the operating voltages and the bus connection.
- Buttons for system and door-opener programming.
- LED status indicators for operation, overload, system programming and door-opener programming.
- AC 12 V output for powering a conventional door opener.
- Relay output for switching a door opener with its own power supply.
- Door-opener switching time continuously adjustable from 1 to 10 s.

Important information

Camera or intercom preparation

The intercom systems must be connected by a qualified electrician. For planning, installation and commissioning, please contact the electrician of your choice.

Water protection

To achieve optimal protection of your post from water, the mailbox or mailbox system should, where possible, be located under a porch or canopy.

Mail is only protected from water if it is placed completely inside the box and the insertion flap is closed. Partially inserted mail allows the ingress of moisture and dirt into the mailbox. This system is protected against water ingress in accordance with DIN EN 13724. Water ingress is not a reason for complaint.

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Newspaper compartment, Camera, Intercom
Functional box prepared for manufacturer	GIRA
Material	Aluminium AlMg3 W19, Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
Mounting type	Free-standing
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres

Dimensions


Height of single box in mm	BK 400.0 | ZF 200.0
Width of single box in mm	400,0
Capacity in litres	BK 16.0 | ZF 8.0
Height of letterbox slot in mm	35,0
Width of letter slot in mm	360,0
Height of letterbox in mm	800,0
Width of letterbox system in mm	400,0
Overall height in mm	1614,0
Total width in mm	408,0
Depth in mm	100.0 + 25.0 Rain roof
Weight in kg	45
Delivery condition	Delivery is assembled

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimension drawing

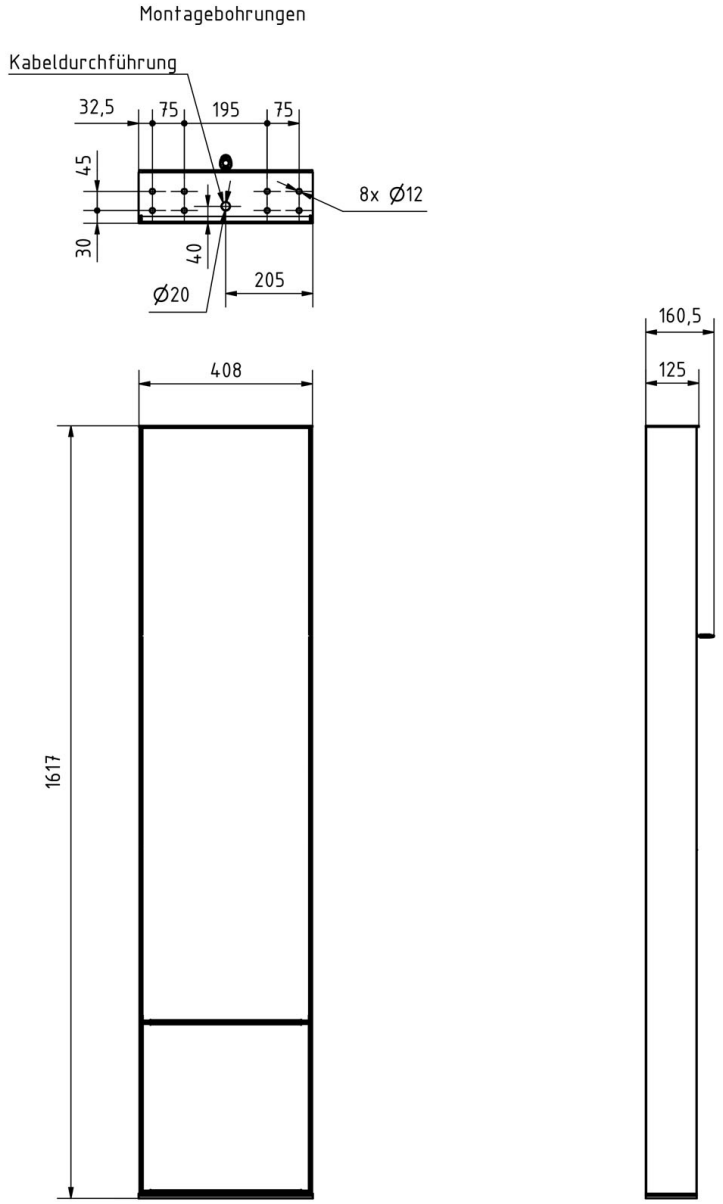


Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images



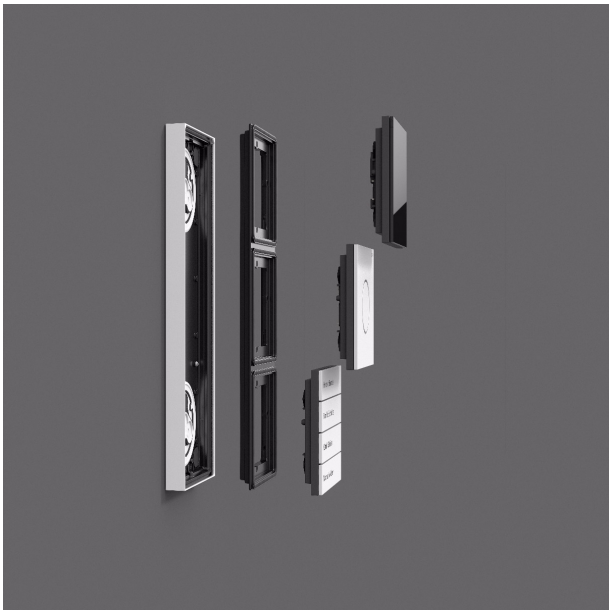






Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

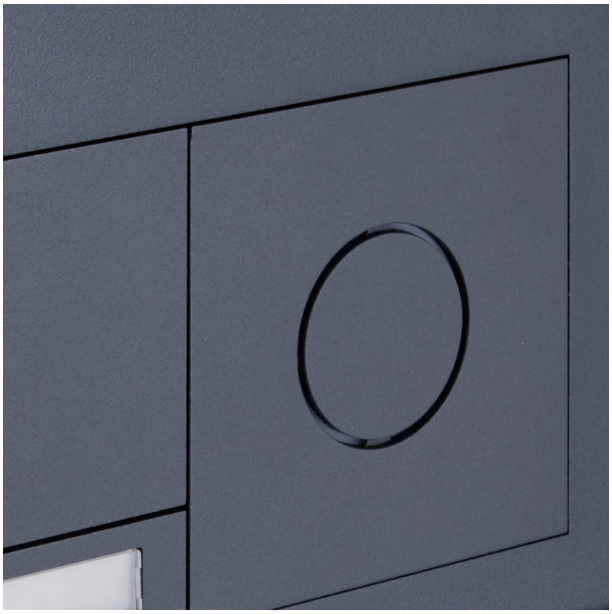





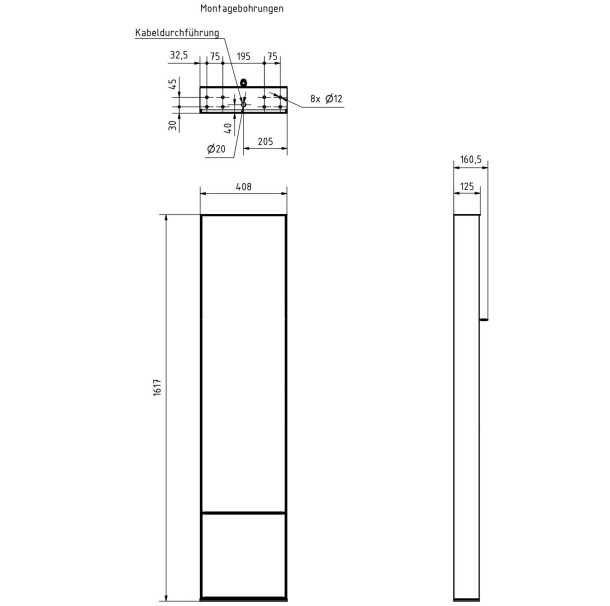

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618







Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618