Designer flush-mounted mailbox GOETHE UP - RAL colour of your choice - GIRA System 106 side-mounted - Complete video set | Right | without newspaper compartment | Gira System 106 Complete Video Set 2DB



Product number 215-UP-1-SPS-KSGI106-R

Product description

Design flush-mounted mailbox GOETHE UP - RAL colour of your choice - GIRA System 106 side-mounted - VIDEO complete set

High-quality flush-mounted mailbox with seamlessly integrated Gira System 106 side module in a flush-front design. The modern GOETHE mailbox is ideal for an upscale entrance area. The straight-lined design without a visible lock gives this mailbox a particularly elegant appearance. 3 GIRA System modules are included, so the mailbox can be used immediately. The matching GIRA apartment station and the control unit to complete this mailbox are included. The modules can be exchanged later as required via the simple retaining system.

The dimensions of the single box provide a capacity of approx. 16 litres; the large outlet guarantees that even DIN-C4 envelopes and magazines, or post after several days' absence, are not creased. The innovative Push-Key lock is concealed invisibly inside the mailbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the lock positioned as it is, the collection door is designed so that your post cannot fall out towards you. Thanks to the water-drip edge, the mail inside is optimally protected from the weather. The inlet flap is equipped with high-quality axle dampers, ensuring quiet closing and preventing annoying rattling from weather influences.

The mailbox systems of the GOETHE collection are characterised by the consistent use of stainless steel. The result is very high durability and sustainability. The construction has been developed by our own engineers with a focus on high flexibility and modularity, easy spare-part assembly and uncomplicated self-installation. Spare parts for all GOETHE systems are available directly in our shop.

Thanks to the design, self-installation is straightforward.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Flush-mounted mailbox made entirely of stainless steel.
- Quality manufacture - Made in Germany by Briefkasten Manufaktur Lippe.
- Mailbox (BH 400x400mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Innovative Push-Key lock with 2 keys.
- Letters are inserted and removed from the front. Inlet flap with high-quality axle dampers for very quiet insertion of mail.
- The mailbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 landscape; large letters fit in without folding.
- Collection door opens from top to bottom, preventing the post from falling out towards you.
- Functional box (BH 200x400mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Nameplate made of stainless steel, powder-coated in RAL colour. Your name and/or a doorbell can optionally be laser-engraved on the nameplate.
- Optionally with laser-engraved house number (a name inscription can also be accommodated here).
- Plaster cover frame made from 2 mm stainless steel angle profile 25 x 58 mm, powder-coated in RAL colour.
- Includes GIRA apartment station & control unit; System 106 door station module, info module & camera module installed.

GIRA

Camera module Gira System 106 - 5561 000, installed without wiring

- Behind the replaceable black glass pane is a high-quality camera with high light sensitivity. With a detection angle of 100° the user is always informed about what is happening at their front door.

Info module Gira System 106 - 5560 920, installed

- For house numbers that are to be prominently displayed.

Door station module Gira System 106 - 5565 920, installed without wiring

- Compact voice module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good intelligibility.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. necessary from the 3rd camera module).
- All other System 106 modules (except the voice module) are powered via the door station module.

Apartment station Gira Video AP 7 1209xx, included

- Video apartment station with a 17.78 cm (7") TFT colour display and comfortable hands-free function for surface-mounted installation or wall mounting with flush-mounted device box or cavity wall box. With the optional stand (see Accessories) also suitable for placement on furniture. A 32 GB SD memory card is included for internal image storage. Full-surface glass front with touch functionality and tactile feedback.

Control unit Video REG Gira 128800, included

- Control unit for powering the audio and video components of the Gira door communication bus.
- Supplies the polarity-protected and short-circuit-proof 2-wire bus when using video components such as colour camera, TFT colour display.
- Up to 2 door stations with colour camera and 28 apartment stations with TFT colour display can be supplied via the Video control unit.
- In total, up to 15 colour cameras can be controlled by the Video control unit (5 video door stations and 10 TKS camera gateways), of which two door stations with colour camera can be powered by the Video control unit. The additional colour cameras must each be operated with their own power supply for door communication.
- Self-resetting electronic short-circuit and overload detection of the operating voltages and the bus connection.
- Buttons for system and door-opener programming.
- LED status indicators for operation, overload, system programming and door-opener programming.
- AC 12 V output for powering a conventional door opener.
- Relay output for switching a door opener with its own power supply.
- Door opener switching time infinitely adjustable from 1 to 10 s.

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. For planning, installation and commissioning, please contact the electrician of your choice.

Water protection

To achieve optimal water protection for your post, the mailbox or mailbox system should, if possible, be located under a canopy.

Postal items are only protected from water if they are placed completely inside the box and the inlet flap is closed. Partially inserted mail allows moisture and dirt to enter the mailbox. This system is protected against water ingress in accordance with DIN EN 13724. Water ingress is not grounds for a complaint.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Camera, Intercom
Functional box prepared for manufacturer	GIRA
Material	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Flush-mounted

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions


Height of single box in mm	BK 400.0 | FK 400.0
Width of single box in mm	BK 400.0 | FK 200.0
Capacity in litres	16
Height of letterbox slot in mm	35,0
Width of letter slot in mm	360,0
Height of letterbox in mm	External dimension 452.0 | installation dimension 410.0
Width of letterbox system in mm	External dimension 652.0 | installation dimension 610.0
Total width in mm	652,0
Depth in mm	100.0 | installation dimension 103.5
Weight in kg	14
Delivery condition	Delivery is assembled

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimension drawing

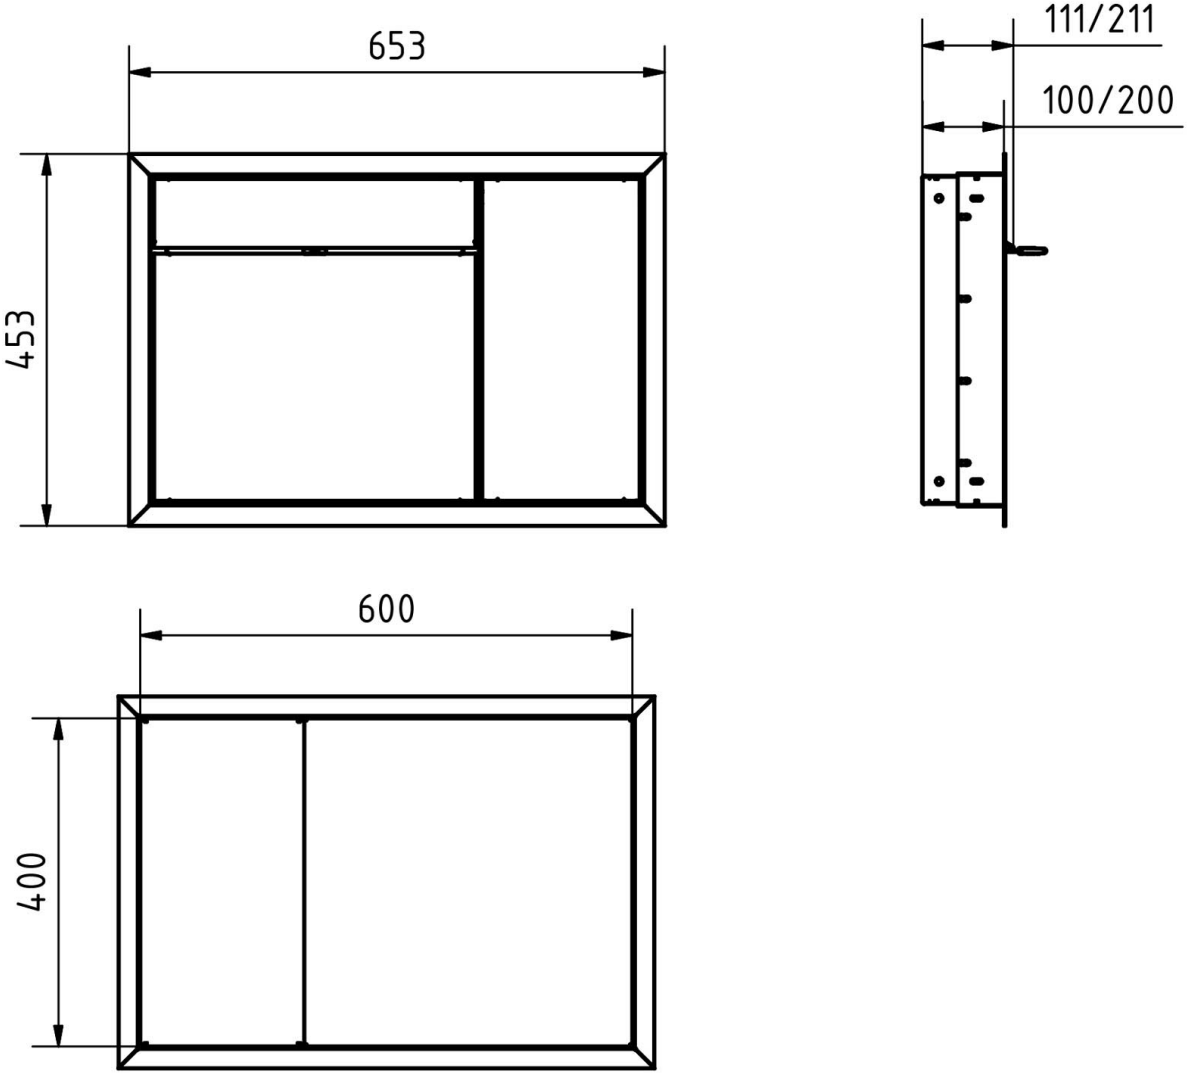


Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images



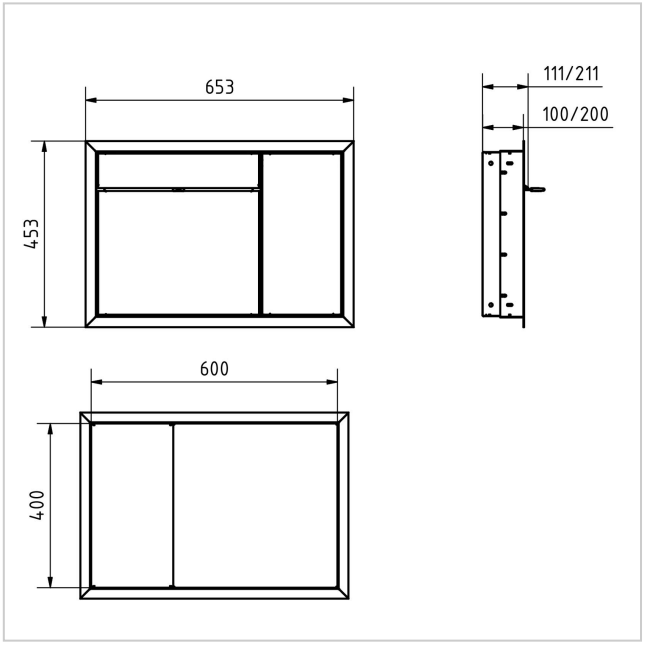






Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618



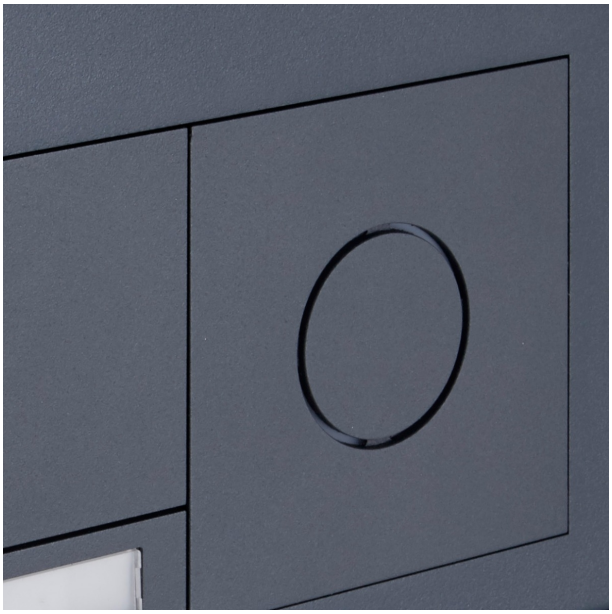





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618