2-compartment freestanding mailbox Design BASIC 385P-9016 ST-T - RAL 9016 traffic white | RAL 9016 Traffic White, fine-textured matt | 300x110x385 mm (WxHxD) - ?? Normal 12 litres | with 2 letterboxes (1x2)



Product number 385P-9016-2S

Product description

Freestanding mailbox system BASIC 385P for 2 households – RAL 9016 Traffic White – narrow version

The freestanding BASIC 385P mailbox system for 2 households is designed for semi-detached and small multi-family houses, office and medical practice premises. Two separately lockable mail compartments are arranged in a narrow configuration to form a stable, clearly organised complete unit. Free-standing installation allows a conveniently accessible position independent of the building façade.

The mailboxes are made of galvanised steel and are fine-textured matt powder-coated in RAL 9016 Traffic White. A close-fitting side cladding with rain canopy and integrated rain drainage channels support weather protection. The solidly manufactured uprights of anodised aluminium profile are also powder-coated in RAL 9016 Traffic White and provide an especially stable, durable base for the freestanding unit.

Each of the 2 mail compartments has approx. 12 litres capacity. The 35 × 265 mm insertion slot is designed for DIN C4 items in portrait orientation. A noise-damping rubber lip reduces the impact of the insertion flap. Mail is retrieved from the front; the access doors open from left to right. Each mailbox is supplied with two keys with key number and an interchangeable nameplate located below the insertion slot.

The advantages of the BASIC 385P mailbox system at a glance

Solid aluminium uprights

Solidly manufactured, anodised aluminium profiles form the stable base of the freestanding unit. The powder-coated construction combines high load-bearing capacity with a long-lasting finish for external use.

DIN C4 insertion with 12 litre capacity

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

The mailboxes each offer approx. 12 litres of postal volume. The 35 × 265 mm insertion slot accepts DIN C4 items in portrait orientation without larger envelopes having to be unnecessarily folded.

Quiet insertion and reliable operation

Rubber lips dampen the insertion flaps. Robust locks, two keys per compartment and protected interchangeable nameplates are designed for daily use in multi-occupancy buildings.

Bolted mounting or casting into concrete

Depending on the chosen version, the aluminium uprights are either bolted to a load-bearing foundation or permanently cast into concrete. This allows the unit to be installed according to the structural situation.

Robust BASIC quality in RAL 9016 Traffic White

Galvanised steel, stainless steel components, solid aluminium uprights and German manufacturing result in a resilient mailbox system for long-term use at the property entrance.

Equipment of the BASIC 385P mailbox system

Mailbox system

Number of mailboxes 2 separately usable mail compartments
Mailbox dimensions 300 × 110 × 385 mm (W × H × D) per compartment
Postal volume Approx. 12 litres per mailbox
Material Galvanised steel; side cladding and rain canopy made of stainless steel V2A
Finish RAL 9016 Traffic White fine-textured matt
Insertion slot 35 × 265 mm, suitable for DIN C4 portrait
Standard Mailboxes in accordance with DIN EN 13724

Mail handling and operation

Insertion flaps With noise-damping rubber lip
Mail retrieval Front access
Door opening From left to right
Keys 4 keys in total, 2 per mailbox
Nameplates 2 interchangeable nameplates below the insertion slots
Rain drainage Integrated rain drainage channels

Solid aluminium uprights

Uprights Solidly manufactured, anodised aluminium profile
Coating Powder-coated in RAL 9016 Traffic White
Mounting types Either bolted mounting or casting into concrete
Bolted mounting Uprights available in 1200 or 1600 mm
Casting into concrete Uprights available in 1600 or 2000 mm
Delivery condition Uprights and mailbox system supplied split for straightforward assembly
Manufacture Made in Germany by Briefkasten Manufaktur Lippe

Installation on a foundation

For bolted mounting a level and sufficiently load-bearing foundation is required. The fasteners must be selected according to the foundation, the weight of the unit and the local installation conditions.

Installation by casting into concrete

For the version to be cast into concrete, the extended aluminium uprights are anchored plumb in a suitably dimensioned concrete foundation. Foundation size and embedment depth must be matched to ground conditions, unit dimensions and local loads.

Note on weather protection

The rain canopy, close-fitting side cladding and rain drainage channels support weather protection. Mail items must be fully inserted so that the insertion flaps can close completely. Under extreme weather conditions, slight moisture ingress may occur despite compliant design.

Product properties

Material	Steel, galvanised, Aluminium AlMg3 W19, Stainless steel V2A 1.4301
Series	BASIC
Boxes by volume	Normal > 10 litres
Name labelling	Nameplate
Mounting type	Free-standing
Number of boxes	with 2 letterboxes
Removal of mail	On the front
Surface/colour	RAL 9016 traffic white

Dimensions


Height in mm	1
Height of single box in mm	110.0
Width of single box in mm	300.0
Capacity in litres	12
Height of letterbox slot in mm	35.0
Width of letter slot in mm	265.0
Height of letterbox in mm	220.0
Width of letterbox system in mm	300.0
Overall height in mm	1200.0 | 1600.0
Total width in mm	400.0
Depth in mm	435.0
Weight in kg	23
Delivery condition	Delivery is in blocks; freestanding elements / mailbox supplied in parts

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images

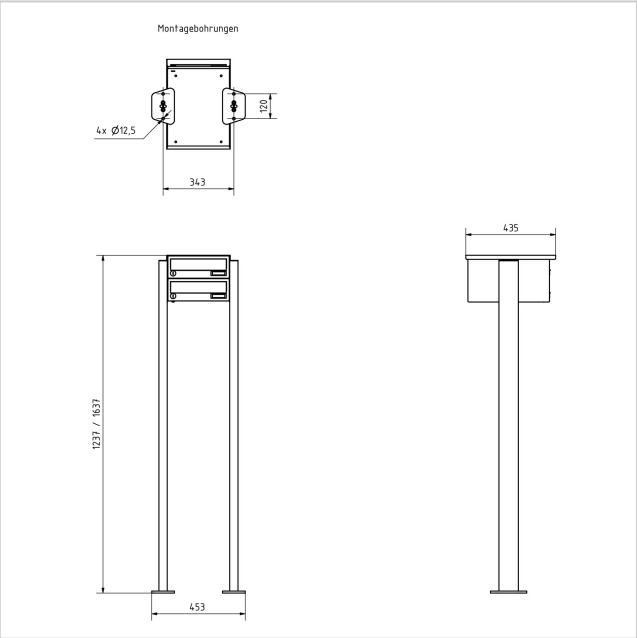







Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618