Designer surface-mounted mailbox GOETHE AP - RAL colour of your choice - GIRA System 106 - VIDEO complete set | without newspaper compartment | 100mm depth | Gira System 106 Complete Video Set 2DB



Product number 215-AP-1-SP-KSGI106

Product description

Design surface-mounted mailbox GOETHE® AP - RAL colour of your choice - GIRA System 106 - VIDEO complete set

High-quality surface-mounted mailbox with seamlessly integrated Gira System 106 in a flush-design. The modern GOETHE® mailbox is ideal for a sophisticated entrance area. The straightforward shape without a visible lock gives this mailbox a particularly elegant appearance. 3 GIRA System modules are included so the mailbox can be used immediately. The matching GIRA indoor station and the control unit to complete this mailbox are included. The modules can be easily exchanged later via the simple holding system.

The dimensions of the single box provide a capacity of approx. 16 litres; the large insertion aperture also ensures no creased post for DIN-C4 envelopes and magazines or after several days' absence. The innovative push-key lock is hidden invisibly inside the mailbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the arrangement of the lock, this mailbox is designed so that the collection door prevents your post from falling out towards you. The internal mail is optimally protected from the weather by the rain runoff edge. The insertion flap is fitted with high-quality axle dampers, ensuring a quiet closing and preventing annoying rattling due to weather influences.

The surface-mounted mailbox systems of the GOETHE® collection are characterised by the consistent use of stainless steel and aluminium. The result is very high durability and sustainability. The construction has been developed by our own engineers with a view to high flexibility/modularity, simple spare part assembly and uncomplicated self-installation. Spare parts for all GOETHE® systems are available directly in our shop.

Thanks to the design, self-installation is straightforward.

Utility model protected according to DPMA file number DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- High-quality surface-mounted mailbox made of stainless steel and aluminium.
- Quality manufacturing - Made in Germany by Briefkasten Manufaktur Lippe.
- Mailbox (BH 400x400mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Innovative push-key lock with 2 keys.
- Letters are inserted and collected from the front. Insertion flap with high-quality axle dampers for very quiet posting of mail.
- The mailbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 landscape, so large letters also fit without bending.
- The collection door opens from top to bottom. This prevents your mail from falling out towards you.
- Function box (BH 400x200mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Name plate made of stainless steel, powder-coated in the chosen RAL colour. Your name and/or a bell can optionally be laser-engraved onto the name plate.
- Optionally with house number, laser-engraved (a name inscription can also be stored here).
- Optimal weather protection through rain runoff edges and a rain canopy made of 3 mm aluminium AlMg3 W19, powder-coated in RAL colour of your choice.
- Side cladding made of 3 mm aluminium AlMg3 W19, powder-coated in RAL colour of your choice.
- Includes mounting rail for wall mounting.
- Includes GIRA indoor station & control unit supplied, System 106 door station module, info module & camera module installed.

GIRA

Camera module Gira System 106 - 5561 000, installed without wiring

- Behind the replaceable black glass panel is a high-quality camera with high light sensitivity. With a detection angle of 100° the user always has a view of what is happening at their front door.

Info module Gira System 106 - 5560 920, installed

- For house numbers that should be displayed prominently.

Door station module Gira System 106 - 5565 920, installed without wiring

- Compact voice module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good intelligibility.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. required from the 3rd camera module).
- All other System 106 modules (except the voice module) are supplied with power via the door station module.

Indoor station Gira Video AP 7 1209xx, included

- Video indoor station with a 17.78 cm (7") TFT colour display and comfortable hands-free function for surface-mounted installation or wall mounting with a flush-mounted device box or cavity wall box. With the optional stand (see Accessories) also suitable for placement on furniture. A 32 GB SD memory card is included for internal image storage. Full-surface glass front with touch functionality and tactile feedback.

Video control unit REG Gira 128800, included

- Control unit for supplying the audio and video components of the Gira door communication bus.
- Supplies the polarity-protected and short-circuit-proof 2-wire bus when using video components such as colour camera, TFT colour display.
- Up to 2 door stations with colour camera and 28 indoor stations with TFT colour display can be supplied via the video control unit.
- In total, up to 15 colour cameras can be controlled by the video control unit (5 video door stations and 10 TKS camera gateways), of which two door stations with colour camera can be powered by the video control unit. The additional colour cameras must each be operated with their own power supply for door communication.
- Self-resetting electronic short-circuit and overload detection for the operating voltages and the bus connection.
- Buttons for system and door opener programming.
- LED status indicators for operation, overload, system programming and door opener programming.
- AC 12 V output for powering a conventional door opener.
- Relay output for switching a door opener with its own power supply.
- Door opener switching time continuously adjustable from 1 to 10 s.

Important information

Camera or intercom preparation

The intercom systems must be connected by a qualified electrician. Please contact the electrician of your choice for planning, installation and commissioning.

Water protection

To achieve optimal water protection for your mail, the mailbox or mailbox system should, if possible, be located under a porch or overhang.

Mail is only protected from water if it is placed completely inside the box and the insertion flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the mailbox. This system is protected against the ingress of water according to DIN EN 13724. Water ingress is not a reason for complaint.

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Camera, Intercom
Functional box prepared for manufacturer	GIRA
Material	Aluminium AlMg3 W19, Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Surface-mounted

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions


Height of single box in mm	400.0
Width of single box in mm	400.0
Capacity in litres	16
Height of letterbox slot in mm	35.0
Width of letter slot in mm	360.0
Height of letterbox in mm	600.0
Width of letterbox system in mm	400.0
Total width in mm	408.0
Depth in mm	100.0 + 25.0 rain canopy
Weight in kg	19
Delivery condition	The product is delivered assembled.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimension drawing

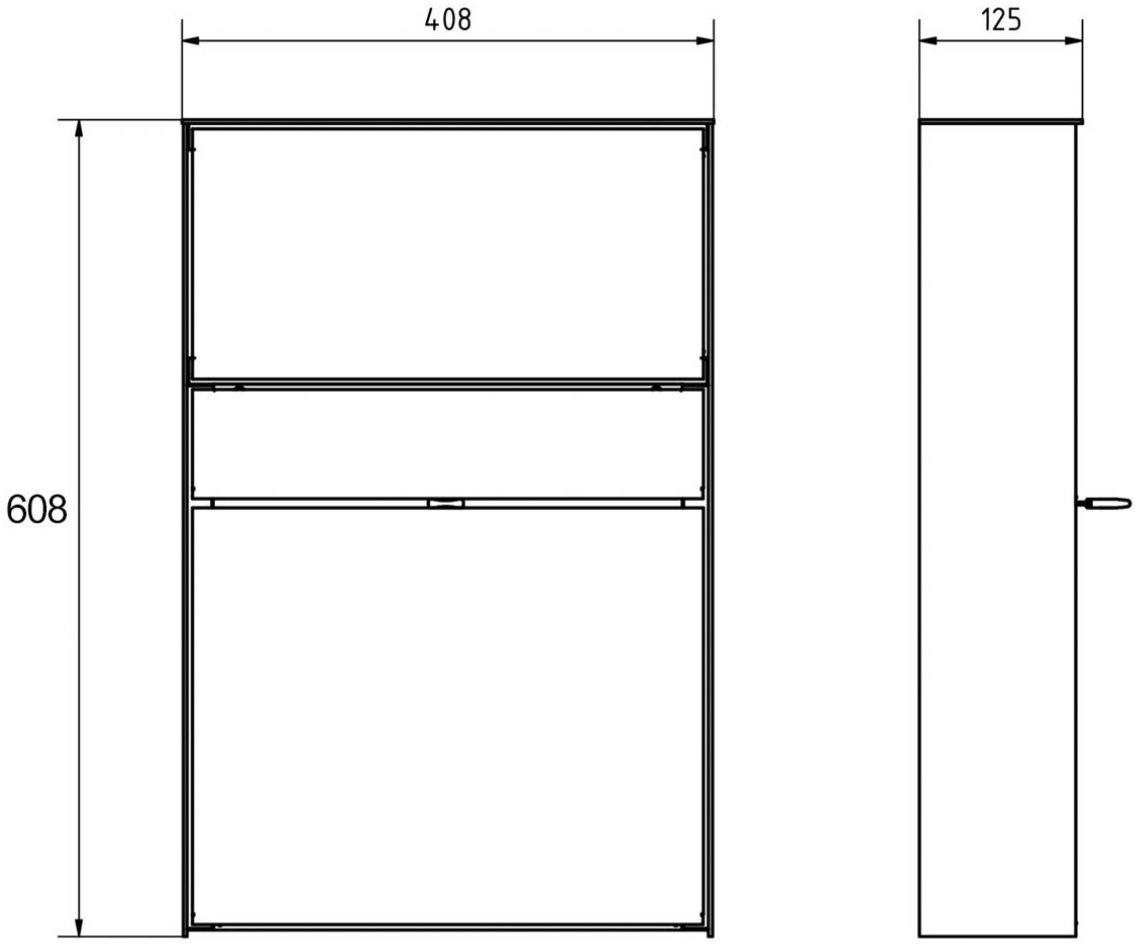

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110


Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images








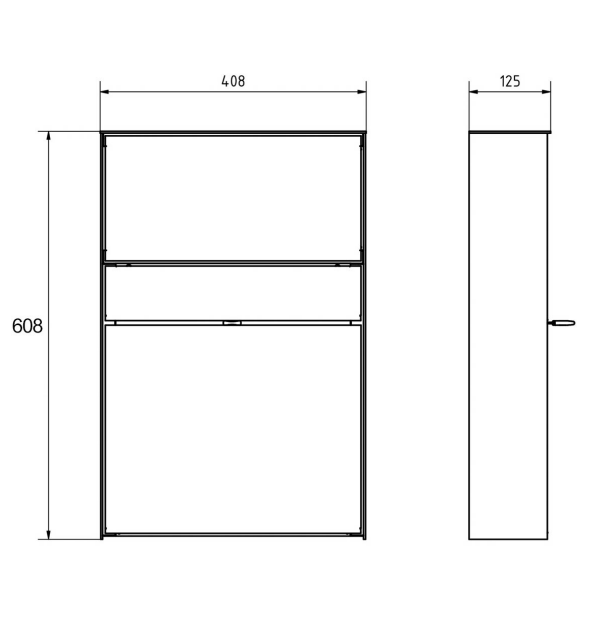

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

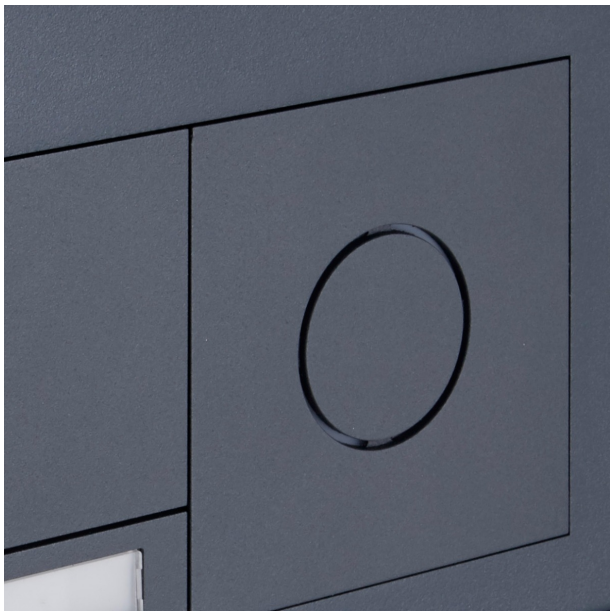







Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618