Design flush-mounted mailbox GOETHE UP with side newspaper compartment - RAL colour of your choice - GIRA System 106 Keyless In - VIDEO complete set | Right | with newspaper compartment | Gira System 106 Complete Video Set 2DB Fingerprint



Product number 215-UP-1-SPSZF-KGI106F-R

Product description

Design flush-mounted letterbox GOETHE UP with side newspaper compartment - RAL colour of your choice - GIRA System 106 Keyless In - VIDEO complete set

High-quality flush-mounted letterbox with newspaper compartment and seamlessly integrated Gira System 106 in a flush design. The modern GOETHE letterbox is ideal for a high-quality entrance area. The linear design without a visible lock gives this letterbox a particularly elegant appearance. 4 GIRA system modules are included so the letterbox can be used immediately. The matching GIRA apartment station and the control unit to complete this letterbox are included. The modules can be exchanged subsequently at will thanks to the simple mounting system.

The dimensions of the single box provide a capacity of approx. 16 litres; the large inlet guarantees that even DIN C4 envelopes and magazines — or mail after several days' absence — are not creased. The innovative Push-Key lock is hidden invisibly inside the letterbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the position of the lock, this letterbox is designed so that the collection door prevents the mail from falling out towards you. The internal mail is optimally protected from the weather by the water runoff edge. The inlet flap is fitted with high-quality hinge dampers to ensure a quiet closing and to prevent annoying rattling caused by weather conditions.

The GOETHE collection letterbox systems are characterised by the consistent use of stainless steel. The result is very high durability and sustainability. The construction has been developed by our own engineers with a view to high flexibility and modularity, simple spare-part assembly and straightforward self-installation. Spare parts for all GOETHE systems are available directly from our shop.

Thanks to the design, self-installation is uncomplicated.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Flush-mounted letterbox completely made of stainless steel.
- Quality manufacturing - Made in Germany by Briefkasten Manufaktur Lippe.
- Letterbox (BH 400 x 400 mm) made of stainless steel 1.4016 (corrosion-resistant magnetic stainless steel), powder-coated in RAL colour of your choice.
- Innovative Push-Key lock with 2 keys.
- Letter insertion and collection are from the front. Inlet flap with high-quality hinge dampers for very quiet mail insertion.
- The letterbox complies with DIN/EN 13724. Inlet size (3.5 cm x 36.0 cm) for C4 landscape — large letters also fit without bending.
- Collection door opens from top to bottom. This prevents your mail from falling out towards you.
- Newspaper compartment (BH 400 x 200 mm) made of stainless steel 1.4016 (corrosion-resistant magnetic stainless steel), powder-coated in RAL colour of your choice with stainless steel laser engraving "ZEITUNG" (font ARIAL; if a name/house number is requested, it will be in your chosen font).
- Newspaper compartment opens from bottom to top.
- Function box (BH 200 x 600 mm) made of stainless steel 1.4016 (corrosion-resistant magnetic stainless steel), powder-coated in RAL colour of your choice.
- Optional name engraving 15–40 mm on the info module, laser-engraved.
- Optional house number 60–80 mm, laser-engraved.
- Nameplate made of stainless steel, powder-coated to the chosen RAL colour. A bell is laser-engraved.
- Plaster cover frame made of 2 mm stainless steel angle profile 25 x 58 mm, powder-coated in the chosen RAL colour.
- Includes GIRA apartment station, power supply & control unit included, System 106 info module, System 106 door station module, Keyless In fingerprint module & camera module fitted.

GIRA

Camera module Gira System 106 - 5561 000, installed without cabling

- Behind the replaceable black glass panel is a high-quality camera with high light sensitivity. With a detection angle of 100° the user always has a clear view of what is happening at their front door.

Info module Gira System 106 - 5560 920, installed

- For house numbers/labels that should be displayed prominently.

Keyless In fingerprint module Gira System 106 - 5551 920, installed

The GIRA fingerprint module as a professional biometric access control system based on the next-generation surface-scan technology. Commissioning and user management are carried out via the Gira Keyless In app.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Can be used as a stand-alone device with Gira TKS switching actuators or in combination with the Gira door communication system as a door-call system for buildings with multiple residential units.
- Scanning of the lowest skin layer by high frequency. High recognition rate and tamper resistance.
- Evaluation of the unique characteristic features of the living human finger.
- Up to 99 fingers can be managed by the fingerprint reading unit.
- Reliable recognition of fingers that have been slightly injured during activities such as gardening (only the outer skin layer is affected).
- Data protection through encryption methods.
- Fast response time from placing the finger to release: approx. 1 s for up to 30 stored fingers, approx. 3 s for up to 99 stored fingers.
- Night-time illumination of the fingerprint area for orientation using a white LED.
- 360° finger placement possible.
- 3-colour LED status indicator for optical signalling during programming and operation.
- Master PIN on the enclosed sealed security card if the administrator finger is no longer available. The device can be reset to factory settings with the enclosed security card.
- Acknowledgement buzzer for acoustic signalling for users or the installer.
- Acoustic warning tone in case of unauthorised removal of the fingerprint module for tamper detection. Tamper switching with switching actuator in the door communication system.
- Inputs and outputs: connector strip for connection cable to the Gira door communication system.

Door station module Gira System 106 - 5565 920, installed without cabling

- Compact audio module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof speaker ensure good intelligibility.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. required from the 3rd camera module).
- All other System 106 modules (except the audio module) are powered via the door station module.

Apartment station Gira Video AP 7 1209xx, included

- Video apartment station with a 17.78 cm (7") TFT colour display and comfortable hands-free function for surface mounting or wall mounting with a flush-mounted device box or hollow-wall box. With the optional table stand (see Accessories) also suitable for placement on furniture. A 32 GB SD memory card is included for internal image storage. Full-surface glass front with touch functionality and tactile feedback.

Control unit Video REG Gira 1288 00, included

- Control unit for supplying the audio and video components of the Gira door communication bus.
- Supplies the polarity-protected and short-circuit-proof 2-wire bus when using video components such as colour camera, TFT colour display.
- Up to 2 door stations with colour camera and 28 apartment stations with TFT colour display can be supplied via the video control unit.
- In total, up to 15 colour cameras can be controlled by the video control unit (5 video door stations and 10 TKS camera gateways), of which two door stations with colour camera can be supplied with power by the video control unit. The additional colour cameras must each be operated with their own power supply for door communication.
- Auto-resetting electronic short-circuit and overload detection of the operating voltages and the bus connection.
- Buttons for system and door-opener programming.
- LED status indicators for operation, overload, system programming and door-opener programming.
- AC 12 V output for powering a standard door opener.
- Relay output to switch a door opener with its own power supply.
- Door opener switching time continuously adjustable from 1 to 10 s.

Power supply DC 24 V 300 mA Gira 1296 00, included

- DC 24 V power supply for feeding door communication components.
- Supplies the Keyless In module.

Important information

Preparation for camera or intercom

The intercom systems must be connected by a qualified electrician. Please contact the electrician of your choice for planning, installation and commissioning.

Water protection

To achieve optimal protection of your mail from water, the letterbox or letterbox system should, if possible, be located under a canopy.

Mail is only protected from water when it is placed completely inside the box and the inlet flap is closed. Partially inserted mail allows moisture and dirt to enter the letterbox. This system is protected against water ingress according to DIN EN 13724. Water ingress is not a reason for complaint.

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Newspaper compartment, Camera, Intercom, Fingerprint
Functional box prepared for manufacturer	GIRA
Material	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Flush-mounted

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions


Height of single box in mm	BK 400.0 | ZF 200.0
Width of single box in mm	400,0
Capacity in litres	BK 16.0 | ZF 8.0
Height of letterbox slot in mm	35,0
Width of letter slot in mm	360,0
Height of letterbox in mm	External dimension 652.0 | installation dimension 605.0
Width of letterbox system in mm	External dimension 652.0 | installation dimension 605.0
Total width in mm	650,0
Depth in mm	100.0 | installation dimension 103.5
Weight in kg	21
Delivery condition	Delivery is assembled

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimension drawing

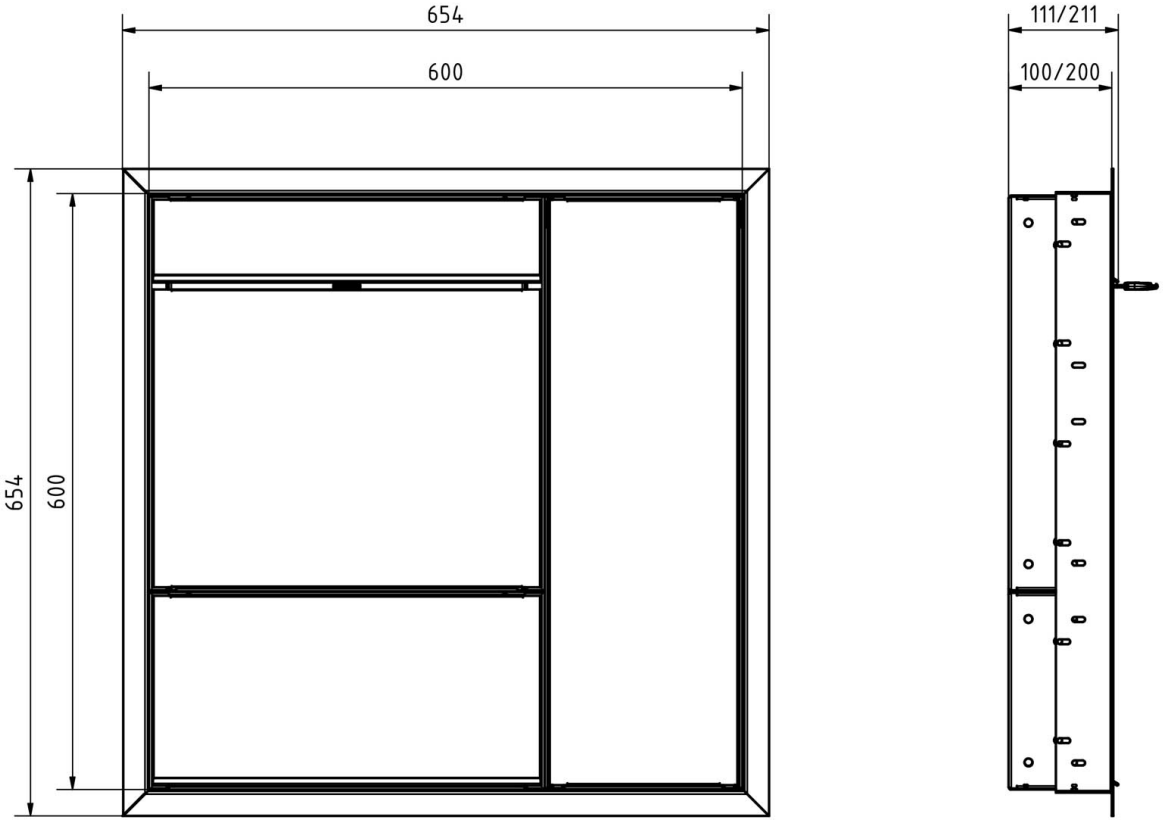

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images





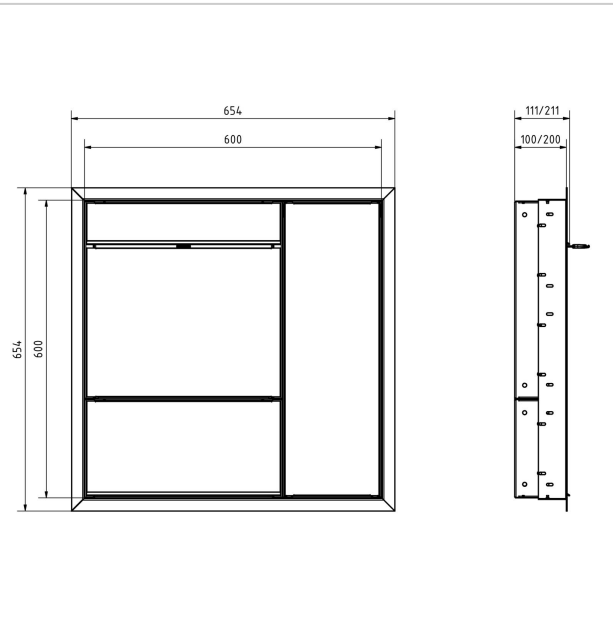




Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618





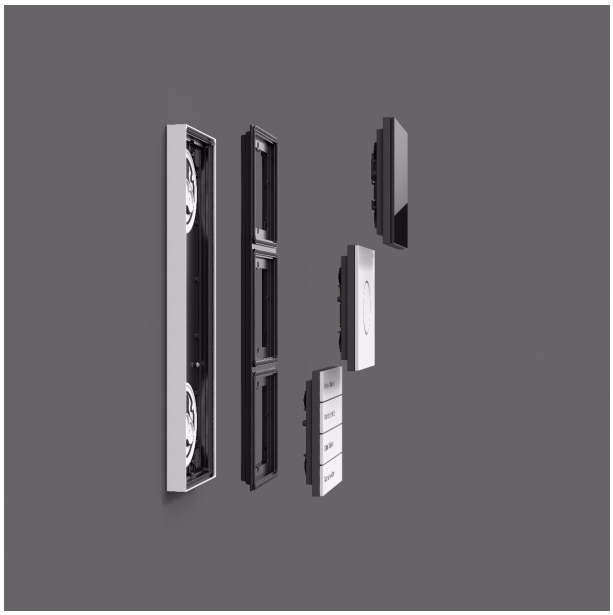

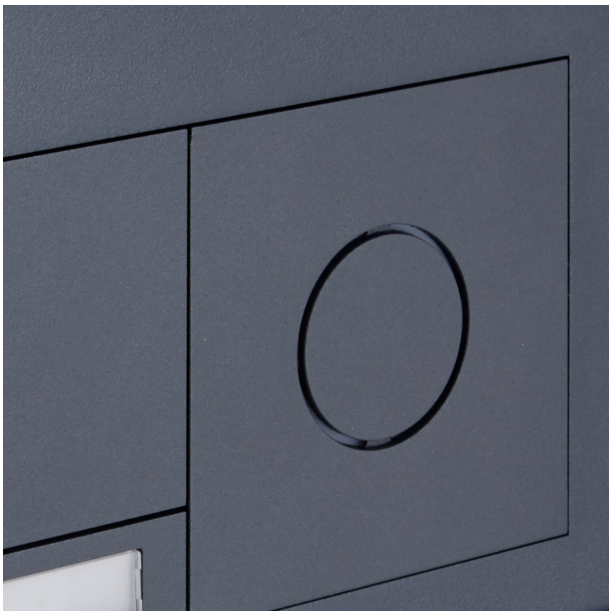

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618







Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618