Designer flush-mounted mailbox GOETHE UP - RAL colour of your choice - GIRA System 106 side-mounted - Video complete set | Left | without newspaper compartment | Gira System 106 Complete Video Set 2DB



Product number 215-UP-1-SPS-KSGI106-L

Product description

Designer recessed mailbox GOETHE UP - RAL of your choice - GIRA System 106 side-mounted - VIDEO complete set

High-quality recessed mailbox with seamlessly integrated Gira System 106 fitted laterally in a flush-mounted design. The modern GOETHE mailbox is ideal for the discerning entrance area. The straightforward shape without a visible lock gives this mailbox an especially elegant appearance. 3 GIRA system modules are included, so the mailbox can be used immediately. The matching GIRA apartment station and the control unit to complete this mailbox are included. The modules can be exchanged at any time afterwards using the simple retention system.

The dimensions of the single box provide a capacity of approx. 16 litres; the large insertion ensures that even C4 envelopes and magazines or post accumulated during several days of absence are not creased. The innovative push-key lock is concealed invisibly inside the mailbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the arrangement of the lock, this mailbox is designed so that the collection door prevents your post from falling towards you. Thanks to the water drainage edge, the mail inside is optimally protected from the weather. The insertion flap is equipped with high-quality axle dampers, ensuring quiet closing and preventing annoying rattling caused by weather influences.

The GOETHE mailbox systems are characterised by the consistent use of stainless steel. The result is very high durability and sustainability. The construction has been developed by our own engineers with regard to high flexibility and modularity, simple spare part assembly and straightforward self-installation. Spare parts for all GOETHE systems are available directly in our shop.

Thanks to the design, self-installation is straightforward.

Protected utility model according to DPMA file reference DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Recessed mailbox made entirely from stainless steel.
- Quality manufacturing - Made in Germany by Briefkasten Manufaktur Lippe.
- Mailbox (BH 400 x 400 mm) made of stainless steel 1.4016 (corrosion-resistant magnetic stainless steel), powder-coated in RAL of your choice.
- Innovative push-key lock with 2 keys.
- Letters are inserted and collected from the front. Insertion flap with high-quality axle dampers for very quiet mail insertion.
- The mailbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 landscape; large letters fit in without bending.
- The collection door opens from top to bottom, preventing your post from falling towards you.
- Function box (BH 200 x 400 mm) made of stainless steel 1.4016 (corrosion-resistant magnetic stainless steel), powder-coated in RAL of your choice.
- Nameplate made of stainless steel, powder-coated in RAL colour. Your name and/or a bell will be optionally laser-etched onto the nameplate.
- Optionally with house number, laser-etched (a name inscription can also be stored here).
- Plaster cover frame made from 2 mm stainless steel angle profile 25 x 58 mm, powder-coated in RAL colour.
- Incl. GIRA apartment station & control unit included, System 106 door station module, info module & camera module installed.

GIRA

Camera module Gira System 106 - 5561 000, installed without cabling

- Behind the replaceable black glass plate is a high-quality camera with high light sensitivity. Thanks to a field of view of 100°, the user is always informed about what is happening at their front door.

Info module Gira System 106 - 5560 920, installed

- For house numbers that should be prominently displayed.

Door station module Gira System 106 - 5565 920, installed without cabling

- Compact audio module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good intelligibility.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. required from the 3rd camera module).
- All other System 106 modules (except the audio module) are powered via the door station module.

Apartment station Gira Video AP 7 1209xx, included

- Video apartment station with a 17.78 cm (7") TFT colour display and convenient hands-free function for surface-mounted installation or wall mounting with a flush-mount device box or hollow-wall box. With the optional desktop stand (see Accessories) also suitable for placement on furniture. A 32 GB SD memory card is included for internal image storage. Full-surface glass front with touch functionality and tactile feedback.

Video control unit REG Gira 128800, included

- Control unit for supplying the audio and video components of the Gira door communication bus.
- Supply of the polarity-proof and short-circuit-proof 2-wire bus when using video components such as colour camera, TFT colour display.
- Up to 2 door stations with colour camera and 28 apartment stations with TFT colour display can be supplied via the video control unit.
- In total, up to 15 colour cameras can be controlled by the video control unit (5 video door stations and 10 TKS camera gateways), of which two door stations with colour camera can be powered by the video control unit. The additional colour cameras must each be operated with their own power supply for door communication.
- Self-resetting electronic short-circuit and overload detection of the operating voltages and the bus connection.
- Buttons for system and door-opener programming.
- LED status indicators for operation, overload, system programming and door-opener programming.
- AC 12 V output to supply a standard door opener.
- Relay output to switch a door opener with its own power supply.
- Door-opener switching time continuously adjustable from 1 to 10 s.

Important information

Camera or intercom preparation

The intercom systems must be connected by a qualified electrician. Please consult the electrician of your choice for planning, installation and commissioning.

Water protection

To achieve optimal protection of your post from water, the mailbox or mailbox system should ideally be located under a canopy.

Mail is only protected from water if it is placed completely inside the box and the insertion flap is closed. Post that is not fully inserted allows moisture and dirt to enter the mailbox. This system is protected against water ingress according to DIN EN 13724. Water ingress is not a valid reason for a complaint.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Camera, Intercom
Functional box prepared for manufacturer	GIRA
Material	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Flush-mounted

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions


Height of single box in mm	BK 400.0 | FK 400.0
Width of single box in mm	BK 400.0 | FK 200.0
Capacity in litres	16
Height of letterbox slot in mm	35,0
Width of letter slot in mm	360,0
Height of letterbox in mm	External dimension 452.0 | installation dimension 410.0
Width of letterbox system in mm	External dimension 652.0 | installation dimension 610.0
Total width in mm	652,0
Depth in mm	100.0 | installation dimension 103.5
Weight in kg	14
Delivery condition	Delivery is assembled

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimension drawing

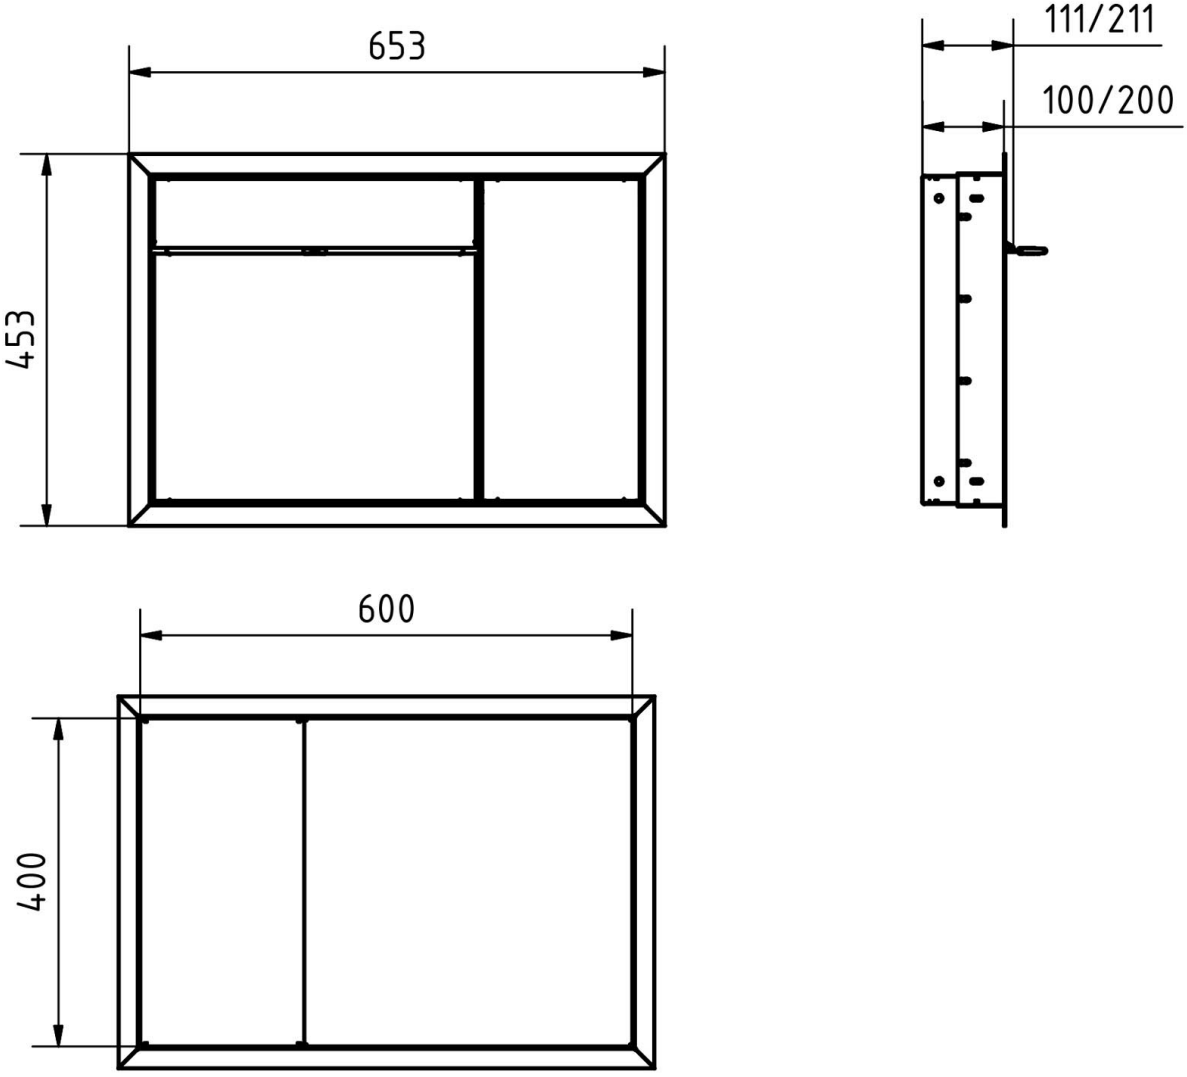

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images





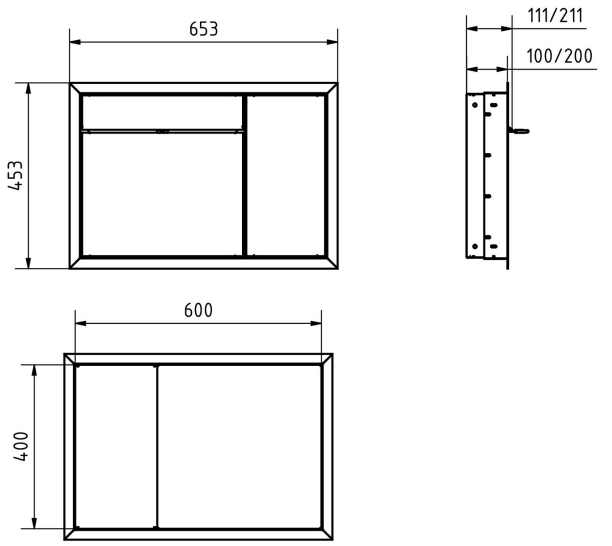




Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

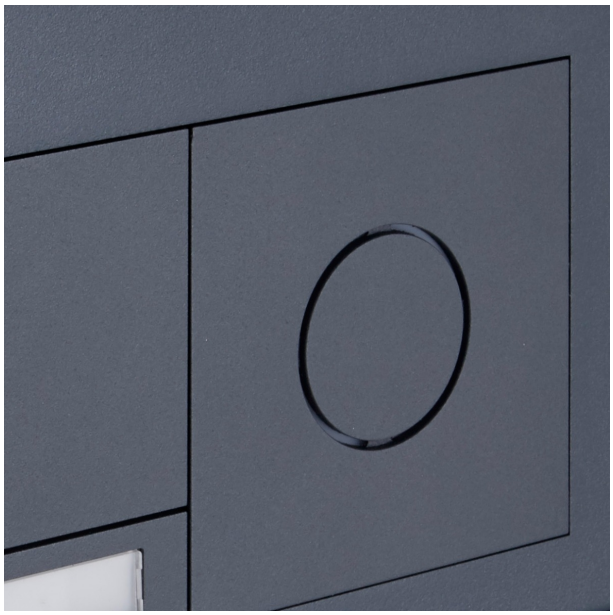








Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

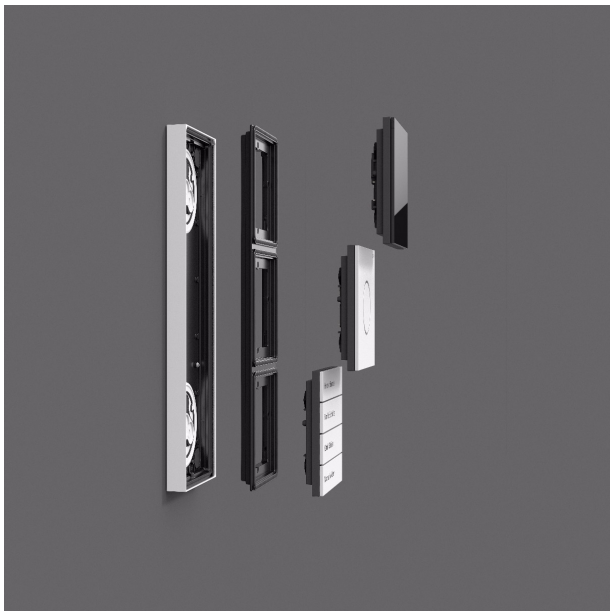



Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618