12-unit freestanding mailbox system Design BASIC 385P-7016-SP with bell-intercom unit incl. side cladding & rain hood - horizontal mailboxes - Anthracite grey RAL 7016 | RAL 7016 Anthracite grey, fine texture, matt | Left | with 12 mailboxes



Product number 385P-7016-12S-SP-L

Product description

Freestanding mailbox system BASIC 385P with bell/intercom module on the left for 12 units – RAL 7016 Anthracite grey – narrow version

The freestanding BASIC 385P mailbox system for 12 units combines 12 individually usable mail compartments with an integrated bell function housing. This brings together mail reception, doorbell buttons and the preparation for a compatible door intercom system in a robust, visually closed entrance solution for larger apartment buildings, residential complexes and commercial properties. In this variant the bell/intercom module is positioned to the left of the mailbox system.

The mailboxes are made of galvanised steel and are finish-powder-coated in RAL 7016 Anthracite grey with a fine-textured matt surface. A close-fitting side panel with rain hood and integrated rain runoff channels support weather protection. The solidly manufactured support posts made from anodised aluminium profile are also powder-coated in RAL 7016 Anthracite grey and form a particularly stable, durable base for the freestanding system.

Each of the 12 compartments has approximately 12 litres of capacity. The 35 × 265 mm aperture is designed for DIN C4 items in portrait format. A noise-damping rubber lip reduces the impact noise of the flap. Mail is retrieved from the front; the access doors open from left to right. Each mailbox is supplied with two keys bearing a key number and an interchangeable nameplate located beneath the flap.

The advantages of the BASIC 385P mailbox system at a glance

Integrated bell function box on the left

The system combines 12 mailboxes with 12 stainless steel bell push-buttons and a speaker aperture with universal adaptor. This creates a central, tidy solution for mail and visitor communication.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Solid aluminium support posts

Solidly manufactured, anodised aluminium profiles form the stable base of the freestanding system. The powder-coated construction combines high load-bearing capacity with a durable outdoor finish.

DIN C4 aperture with 12-litre capacity

The mailboxes each offer approx. 12 litres of postal capacity. The 35 × 265 mm aperture accepts DIN C4 items in portrait format without larger envelopes being unnecessarily creased.

Prepared for door communication

The speaker aperture with universal adaptor is prepared for many commercially available flush-mount speakers.

Robust BASIC quality in RAL 7016 Anthracite grey

Galvanised steel, stainless steel components, solid aluminium support posts and German manufacture create a resilient mailbox system for long-term use at the property entrance.

Equipment of the BASIC 385P mailbox system

Mailbox system

Number of mailboxes 12 separately usable mail compartments
Mailbox dimensions 300 × 110 × 385 mm (W × H × D) per compartment
Postal capacity Approx. 12 litres per mailbox
Material Galvanised steel; side panel and rain hood made of stainless steel V2A
Finish RAL 7016 Anthracite grey fine-textured matt
Aperture 35 × 265 mm, suitable for DIN C4 portrait
Standard Mailboxes conforming to DIN EN 13724

Bell and intercom module

Bell function housing Galvanised steel, powder-coated to match
Position Left
Bell push-buttons 12 round stainless steel bell push-buttons, Type 4
Speaker aperture With universal adaptor for commercially available flush-mount speakers
Nameplate Designed to be impact-resistant and shatterproof

Solid aluminium support posts

Support posts Solidly manufactured anodised aluminium profile
Coating Powder-coated in RAL 7016 Anthracite grey
Mounting options Either screw mounting or concreting-in
Screw mounting Support posts selectable in 1200 or 1600 mm
Concreting-in Support posts selectable in 1600 or 2000 mm
Delivery condition Support posts and mailbox system delivered divided for ease of installation
Manufacture Made in Germany by Briefkasten Manufaktur Lippe

Note regarding the bell/intercom module

The universal adaptor is suitable for many commercially available flush-mount speakers. Intercom systems or built-in speakers, power supply and cabling are not part of the described basic equipment and must be provided to suit the planned system.

Mounting on a foundation

For screw mounting a level and sufficiently load-bearing foundation is required. Fasteners must be selected to suit the foundation, system weight and local installation situation.

Mounting by concreting?in

For the concreting-in version the extended aluminium support posts are anchored vertically in a suitably dimensioned concrete foundation. Foundation size and embedment depth must be matched to ground conditions, system dimensions and local loads.

Note regarding weather protection

The rain hood, close-fitting side panel and rain runoff channels support weather protection. Postal items must be fully inserted so that the flap can close completely. In extreme weather conditions, slight moisture ingress may occur despite standard-compliant construction.

Product properties

Material	Steel, galvanised, Aluminium AlMg3 W19, Stainless steel V2A 1.4301
Series	BASIC
Number of bell push buttons	12 buttons
Functions	Light button, Intercom
Functional box prepared for manufacturer	GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, Comelit
Boxes by volume	Normal > 10 litres
Name labelling	Nameplate
Mounting type	Free-standing
Surface/colour	RAL 7016 anthracite grey
Removal of mail	On the front
Number of boxes	with 12 letterboxes

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions


Height of single box in mm	110.0
Width of single box in mm	300.0
Capacity in litres	12
Height of letterbox slot in mm	35.0
Width of letter slot in mm	265.0
Overall height in mm	1200.0 | 1600.0
Total width in mm	980.0
Depth in mm	435.0
Weight in kg	92
Delivery condition	Delivery is in blocks; freestanding elements and mailbox are delivered separately.

Dimension drawing

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

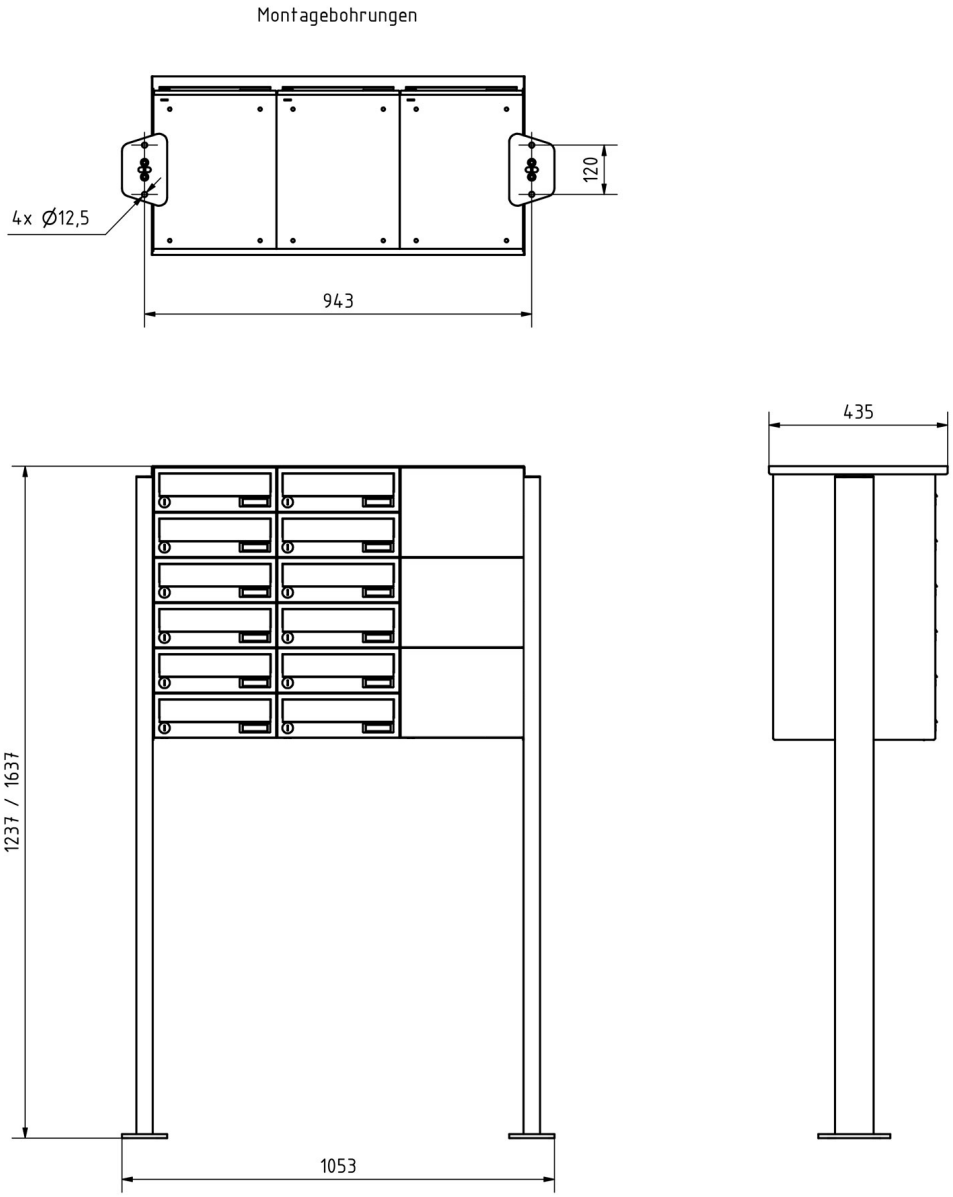


Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110


Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images



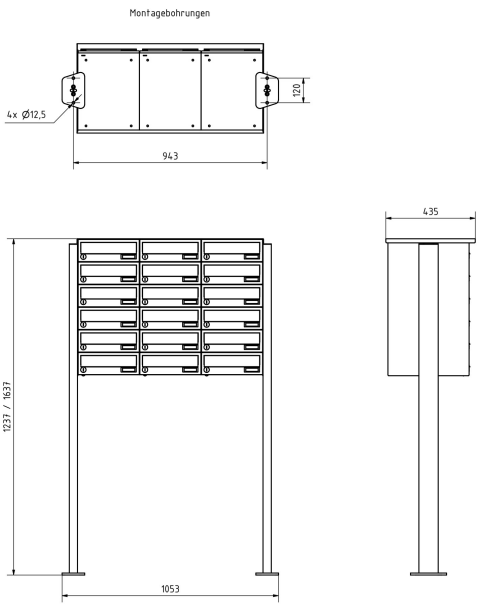



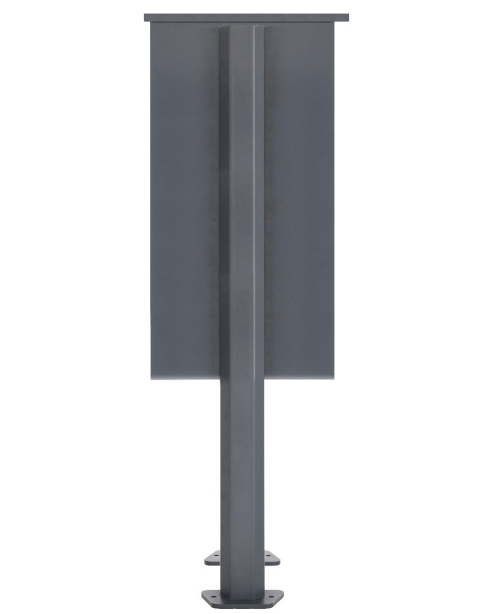

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618









Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618