Designer surface-mounted letterbox GOETHE AP - RAL colour of your choice - GIRA System 106 Keyless In - complete video set | without newspaper compartment | 100mm depth | Gira System 106 Complete Video Set 2DB Fingerprint

Product number 215-AP-1-SP-KSGI106FP



Product description

Design surface-mounted mailbox GOETHE® AP - RAL colour of choice - GIRA System 106 Keyless In - VIDEO complete set

High-quality, surface-mounted mailbox with seamlessly integrated Gira System 106 in a flush-mounted design. The modern GOETHE® mailbox is ideal for the discerning entrance area. The linear shape without a visible lock gives this mailbox a particularly elegant appearance. Three GIRA system modules are included, so the mailbox can be used immediately. The appropriate GIRA indoor station and the control unit to complete this mailbox are included. The modules can be exchanged later at will using the simple mounting system.

The dimensions of the single box provide a capacity of approx. 16 litres; the large slot ensures that DIN C4 envelopes and magazines do not become creased, even after several days' absence. The innovative push-key lock is concealed invisibly inside the mailbox. The key is simply inserted into the existing opening (no turning necessary) and the door opens. With the arrangement of the lock, this mailbox is designed so that the collection door prevents the mail from falling out towards you. The internal post is optimally protected from the weather by the water runoff edge. The inlet flap is equipped with high-quality axle dampers to ensure quiet closing and to prevent disturbing rattling due to weather influences.

The surface-mounted mailbox systems of the GOETHE® collection are characterised by the consistent use of stainless steel and aluminium. The result is very high durability and sustainability. The construction has been developed by our own engineers with a view to high flexibility/modularity, simple spare part assembly and uncomplicated self-installation. Spare parts for all GOETHE® systems are available directly in our shop.

Thanks to the design, self-installation is straightforward.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- High-quality surface-mounted mailbox made of stainless steel and aluminium.
- Quality manufacturing - Made in Germany by Briefkasten Manufaktur Lippe.
- Mailbox (BH 400x400mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of choice.
- Innovative push-key lock with 2 keys.
- Letters are inserted and removed from the front. Inlet flap with high-quality axle dampers for very quiet posting of mail.
- The mailbox complies with DIN/EN 13724. Inlet size (3.5 cm x 36.0 cm) for C4 landscape; large letters fit without bending.
- Collection door opens from top to bottom, preventing your mail from falling out towards you.
- Function box (BH 400x200mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of choice.
- Optional name inscription approx. 15–20 mm high.
- Optional house number inscription approx. 70–80 mm high.
- Optimal weather protection through rain runoff edges and a rain hood made of 3 mm aluminium AlMg3 W19, powder-coated in RAL colour of choice.
- Side cladding made of 3 mm aluminium AlMg3 W19, powder-coated in RAL colour of choice.
- Incl. mounting rail for wall installation.
- Incl. GIRA indoor station, power supply & control unit included; System 106 door station module, Keyless In fingerprint module & camera module installed.

GIRA

Camera module Gira System 106 - 5561 000, installed without cabling

- Behind the replaceable black glass pane is a high-quality camera with high light sensitivity. With a detection angle of 100°, the user is always informed about what is happening at their front door.

Keyless In fingerprint module Gira System 106 - 5551 920, installed

The GIRA fingerprint module as a professional biometric access control system based on the new generation surface-scan technology. Commissioning and user management are carried out via the Gira Keyless In app.

- Can be used as a stand-alone device with Gira TKS switching actuators or in combination with the Gira door communication system as a door call system for buildings with multiple residential units.
- Scanning of the deepest skin layer using high frequency. High recognition rate and tamper resistance.
- Evaluation of the unique characteristic features of the living human finger.
- Up to 99 fingers can be managed by the fingerprint reading unit.
- Reliable recognition of fingers that have been slightly injured, e.g. during gardening (only the outermost skin layer is affected).
- Data protection through encryption procedures.
- Fast response time from placing the finger to release: up to 30 stored fingers approx. 1 s, up to 99 stored fingers approx. 3 s.
- Illuminated fingerprint area for orientation using white LED lighting.
- 360° finger placement possible.
- 3-colour LED status indicator for optical signalling during programming and operation.
- Master PIN number on the enclosed sealed security card, if the administrator finger is no longer available. The device can be reset to factory settings with the enclosed security card.
- Confirmation buzzer for acoustic signalling to the user or installer.
- Acoustic warning tone in case of unauthorised removal of the fingerprint module for sabotage detection. Sabotage circuit with switching actuator in the door communication system.
- Inputs and outputs: plug connector for connection cable for the Gira door communication system.

Door station module Gira System 106 - 5565 920, installed without cabling

- Compact voice module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good intelligibility.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. required from the 3rd camera module).
- All other System 106 modules (except the voice module) are supplied with power via the door station module.

Indoor station Gira Video AP 7 1209xx, included

- Video indoor station with a 17.78 cm (7") TFT colour display and convenient hands-free function for surface-mounted installation or wall mounting with flush-mounted device box or cavity wall box. With the optional stand (see Accessories) also suitable for placement on furniture. A 32 GB SD memory card is included for internal image storage. Full-surface glass front with touch functionality and tactile feedback.

Video control unit REG Gira 1288 00, included

- Control unit for powering the audio and video components of the Gira door communication bus.
- Supplies the polarity-protected and short-circuit-proof 2-wire bus when using video components such as colour camera and TFT colour display.
- Up to 2 door stations with colour camera and 28 indoor stations with TFT colour display can be supplied via the video control unit.
- In total, up to 15 colour cameras can be controlled by the video control unit (5 video door stations and 10 TKS camera gateways), of which two door stations with colour camera can be powered by the video control unit. The remaining colour cameras must each be operated with their own power supply for door communication.
- Self-resetting electronic short-circuit and overload detection of the operating voltages and the bus connection.
- Buttons for system and door opener programming.
- LED status indicators for operation, overload, system programming and door opener programming.
- AC 12 V output for powering a standard door opener.
- Relay output to switch a door opener with its own power supply.
- Door opener switching time steplessly adjustable from 1 to 10 s.

Power supply DC 24 V 300 mA Gira 1296 00, included

- DC 24 V power supply for powering door communication components.
- Supply for Keyless In module.

Important information

Camera or intercom preparation

The intercom systems must be connected by a qualified electrician. For planning, installation and commissioning, please contact the electrician you trust.

Water protection

For optimal water protection of your mail, the mailbox or mailbox system should, if possible, be located under a canopy.

Mail items are only protected from water if they are placed completely inside the box and the inlet flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the mailbox. This system is protected against water ingress according to DIN EN 13724. Water ingress is not a reason for complaint.

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Camera, Intercom, Fingerprint
Functional box prepared for manufacturer	GIRA
Material	Aluminium AlMg3 W19, Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Surface-mounted

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions


Height of single box in mm	BK 400.0 | ZF 200.0
Width of single box in mm	400.0
Capacity in litres	BK 16.0 | ZF 8.0
Height of letterbox slot in mm	35.0
Width of letter slot in mm	360.0
Height of letterbox in mm	800.0
Width of letterbox system in mm	400.0
Total width in mm	408.0
Depth in mm	100.0 + 25.0 rain canopy
Weight in kg	24
Delivery condition	Delivered assembled

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimension drawing

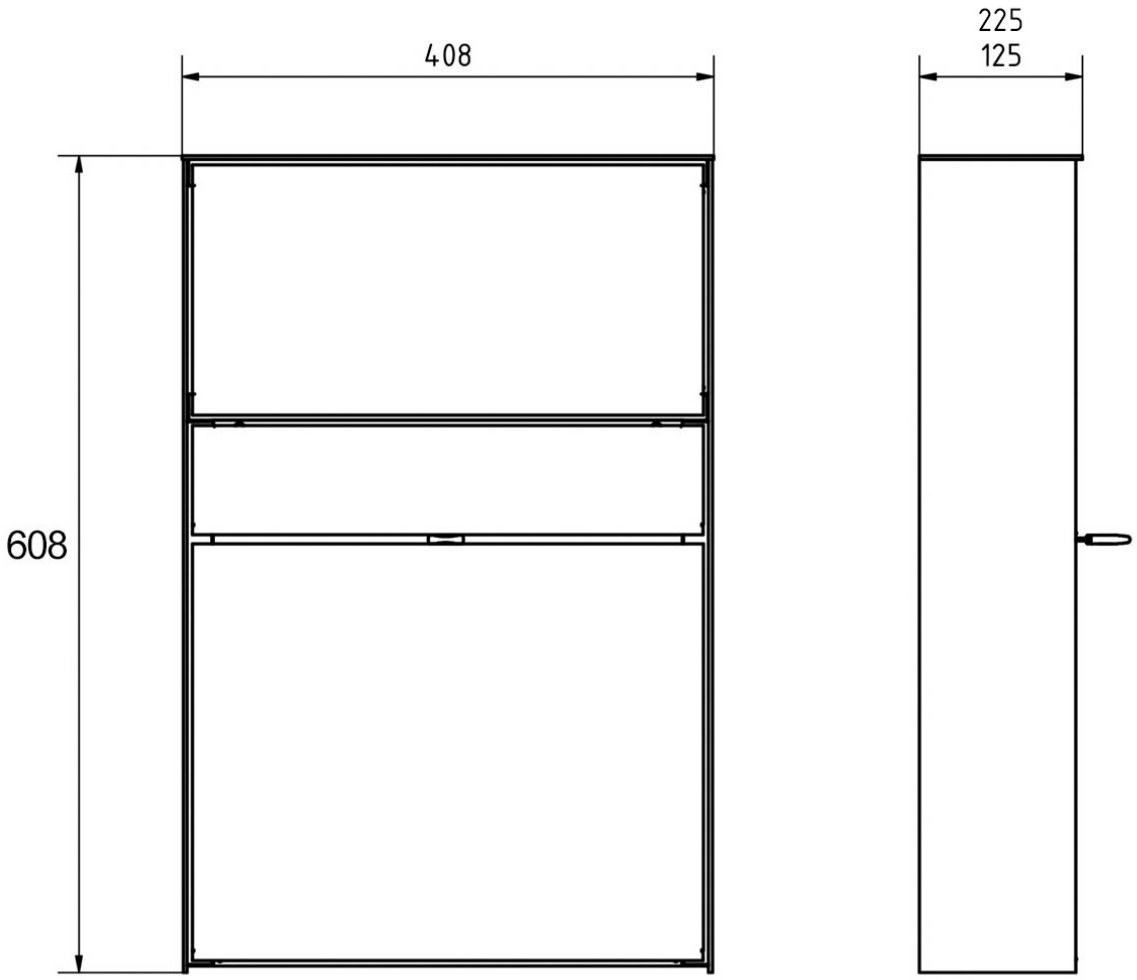


Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images

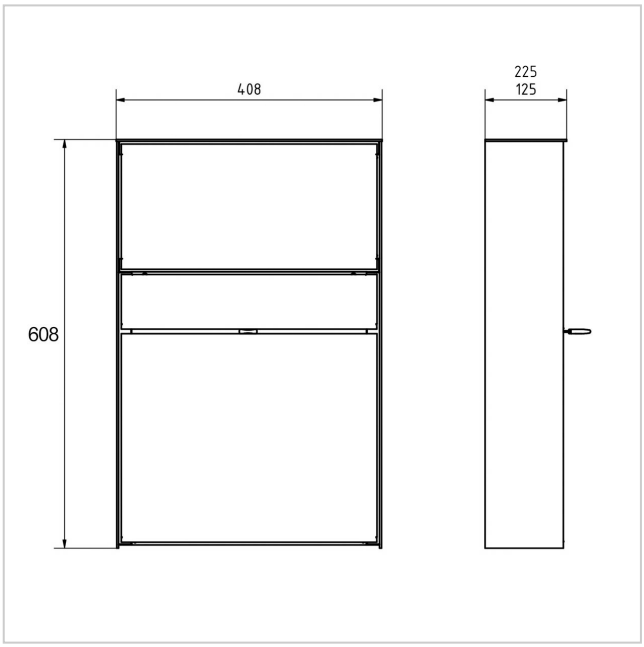



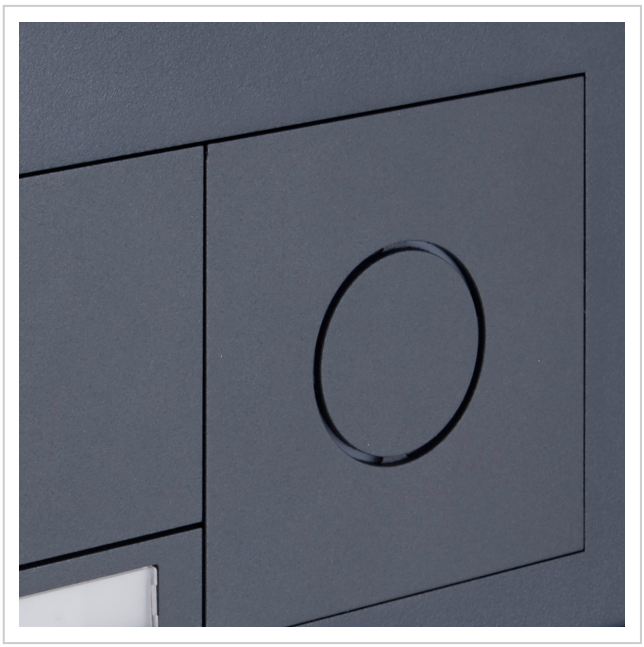



Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618









Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618