DoorBird IP Video Apartment Station A1101 | Black

Product number 1298-A1101-BL



Product description

DoorBird IP Video Indoor Station A1101 Black Edition

The DoorBird IP Video Indoor Station A1101 Black Edition is a convenient addition to DoorBird IP video door stations for residential, commercial and public buildings. It provides live video, two-way audio and the ability to control doors, gates or other connected functions directly from the indoor station.

The compact housing made of black polycarbonate blends discreetly into modern interiors. The 4-inch True Colour touch display with scratch-resistant Gorilla® safety glass offers a clear view and an intuitive user interface. In addition, the main functions can be accessed via five hardware buttons without using the touchscreen.

Comfortable indoor door communication

Individual ringtones allow distinction between front door, floor or gate calls. The configurable RGB LED status bar at the bottom of the indoor station supports visual signalling. With multiple indoor stations, room-to-room communication can also be used.

Flexible integration via Wi-Fi, Ethernet or PoE

The indoor station can be connected to the network via Wi-Fi or network cable. For wired installation, power can be supplied via Power over Ethernet. If the internet connection fails, functions remain available within the local network with the connected DoorBird door stations.

Technical data

Product	DoorBird IP Video Indoor Station A1101 Black Edition
Finish	Polycarbonate, black
Mounting	Surface?mounted Desk stand A8003 available separately
Power supply	15 - 48 V DC, max. 15 W, or Power over Ethernet, PoE 802.3af Mode A
Power consumption	5 W
Operating conditions	0 °C to +55 °C Relative humidity 0 % to 85 %, non?condensing
Connections	LAN/PoE (T+, T-, R+, R-) Digital input #1, 0 V, 0 A (NO), e.g. for a floor call button Digital input #2, 0 V, 0 A (NO), e.g. for a second floor call button Bi?stable self?holding relay #1, max. 24 V DC / AC, 1 A Bi?stable self?holding relay #2, max. 24 V DC / AC, 1 A Bi?stable self?holding relay #3, max. 24 V DC / AC, 1 A 15 - 48 V DC input (+, -), max. 15 W
Relays	3 x freely configurable bi?stable relays, e.g. for door opener, gate control or lift
Display	4?inch True Colour LCD
Touchscreen	Yes, capacitive
Resolution	800 x 480 px
IPS	Yes
Glass	Scratch?resistant Gorilla® safety glass
Audio	Speaker and microphone Echo and noise suppression, AEC and ANR Two?way audio
Volume	HD audio, up to 102 dB
Ringtones	Over 50 ringtones
Controls	Touchscreen 5 hardware buttons for main functions Configurable RGB LED status bar
Ethernet	PoE 802.3af Mode A
Wi-Fi	802.11 b/g/n, 2.4 GHz
Wireless modules	Wi?Fi 802.11 b/g/n, 2.4 GHz
IP features	Door opening and lift call Visitor history with free cloud recording Room?to?room communication with multiple indoor stations SIP support, e.g. for concierge or caretaker calls Weather forecast Home and building automation control via IP, TCP, HTTPS and relays Configuration via the DoorBird app
System requirements	Mobile device with current iOS or Android High?speed fixed?line broadband connection via DSL, cable or fibre No SOCKS or proxy server Ethernet network with DHCP
Supported door stations	Any DoorBird IP video door station
Certifications	CE, FCC, IC, RoHS, IP50

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Weight	430 g
EAN	4260423872677
Manufacturer part number	423872677
Package contents	1 x IP video indoor station 1 x mounting bracket 1 x RJ45 adapter 1 x mains power supply 100 - 240 V AC to 15 V DC with up to 4 country adapters 1 x installation manual 1 x quick start guide with Digital Passport 1 x small parts

Notes

- The DoorBird IP Video Indoor Station A1101 Black Edition is intended for indoor use.
- Connection can be made via Wi-Fi or Ethernet; with Ethernet connection, power via PoE is also possible.
- If the internet connection fails, functions remain available within the local network with the connected DoorBird door stations.
- The desk stand A8003 is available optionally and is not included in the scope of delivery.
- Installation must be carried out by a qualified electrician.


Dimensions

Width in mm	115
Height in mm	185
Total width in mm	115
Depth in mm	25.0
Weight in kg	0,4

More images





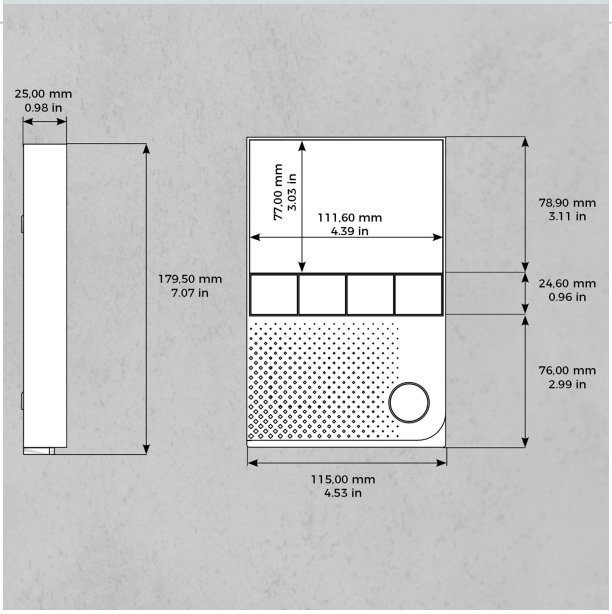

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618