2-unit freestanding mailbox Design BASIC 385P ST-T with doorbell panel - stainless steel, RAL 7016 anthracite | BI-Color brushed stainless steel | RAL 7016 anthracite grey | Top | with 2 mailboxes



Product number 385P-7016VA-2-SP

Product description

Freestanding mailbox system BASIC 385P with bell/intercom unit for 2 parties – BI-Color stainless steel / RAL 7016

The freestanding BASIC 385P mailbox system for 2 parties combines 2 separately usable mail compartments with an integrated bell function housing. This merges mail reception, doorbell buttons and preparations for a compatible door intercom into a robust, visually unified entrance solution for two- and small multi-family houses, office and medical practice properties. The bell function housing is directly integrated into the overall unit.

The mailbox bodies are made of galvanised steel and are powder-coated in RAL 7016 Anthracite grey fine-texture matt. Brushed stainless-steel insertion flaps create a high-quality BI-Color accent. Side panels and rain hood are made of stainless steel V2A and are powder-coated to match in RAL 7016. Particularly distinctive are the solid support posts manufactured from anodised aluminium profile, which are also coated in anthracite grey and give the unit a secure, very robust base.

Each of the 2 mail compartments has approx. 12 litres volume. The 35 × 265 mm insertion slot is designed for DIN C4 items in portrait orientation. A noise-damping rubber lip reduces the slamming of the insertion flap. Mail is retrieved from the front; the retrieval doors open from left to right. Each mailbox is supplied with two keys with key number and a changeable nameplate below the insertion flap.

The advantages of the BASIC 385P mailbox system at a glance

Integrated bell function housing

The unit combines 2 mailboxes with 2 stainless-steel bell buttons and a speaking aperture with universal adapter. This creates a central, tidy solution for mail and visitor communication.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Solid aluminium support posts

Solidly manufactured anodised aluminium profiles form the stable basis of the freestanding unit. The powder-coated construction combines high load-bearing capacity with a durable finish for outdoor use.

DIN C4 insertion with 12 litre volume

The mailboxes each offer approx. 12 litres of mail volume. The 35 × 265 mm insertion slot accepts DIN C4 items in portrait orientation without larger envelopes needing to be unnecessarily folded.

Prepared for door communication

The speaking aperture with universal adapter is prepared for many commercially available flush-mounted speakers.

BI-Color stainless steel / RAL 7016

Brushed stainless-steel insertion flaps create a high-quality contrast to the anthracite grey mailbox bodies. The robust combination of materials couples a modern appearance with durable everyday suitability.

Equipment of the BASIC 385P mailbox system

Mailbox system

Number of mailboxes 2 separately usable mail compartments
Mailbox dimensions 300 × 110 × 385 mm (W × H × D) per compartment
Mail volume Approx. 12 litres per mailbox
Material Galvanised steel; side panels and rain hood made of stainless steel V2A
Finish BI-Color: RAL 7016 Anthracite grey with brushed stainless-steel insertion flaps
Insertion slot 35 × 265 mm, suitable for DIN C4 portrait
Standard Mailboxes conforming to DIN EN 13724

Bell and intercom unit

Bell function housing Galvanised steel, powder-coated to match
Position Integrated into the unit
Bell buttons 2 round stainless-steel bell buttons, type 4
Speaking aperture With universal adapter for commercially available flush-mounted speakers
Nameplate Pressure-resistant and impact-resistant design

Solid aluminium support posts

Support posts Solidly manufactured anodised aluminium profile
Coating Powder-coated in RAL 7016 Anthracite grey
Mounting options Optionally screw-fixed or cast into concrete
Screw mounting Support posts selectable in 1200 or 1600 mm
Concrete embedding Support posts selectable in 1600 or 2000 mm
Delivery condition Support posts and mailbox unit supplied split for assembly
Manufacture Made in Germany by Briefkasten Manufaktur Lippe

Note on the bell/intercom unit

The universal adapter is suitable for many commercially available flush-mounted speakers. Intercom systems or flush-mounted speakers, power supply and cabling are not part of the described basic equipment and must be provided to suit the planned system.

Mounting on a foundation

For screw mounting, a level and sufficiently load-bearing foundation is required. Fixings must be chosen to suit the foundation, the weight of the unit and the local installation situation.

Mounting by concreting in

For the concreted-in version, the extended aluminium support posts are anchored plumb in a suitably dimensioned concrete foundation. Foundation size and embedment depth must be matched to the ground conditions, unit dimensions and local loads.

Note on weather protection

The rain hood, close-fitting side panels and drip channels support weather protection. Mail items must be fully inserted so that the insertion flaps can close completely. Under extreme weather conditions, small amounts of moisture may enter despite compliant construction.

Product properties

Material	Steel, galvanised, Aluminium AlMg3 W19, Stainless steel V2A 1.4301
Series	BASIC
Number of bell push buttons	2 buttons
Functions	Light button, Intercom
Functional box prepared for manufacturer	GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, Comelit
Boxes by volume	Normal > 10 litres
Name labelling	Nameplate
Mounting type	Free-standing
Surface/colour	RAL 7016 anthracite grey, Brushed
Number of boxes	with 2 letterboxes
Removal of mail	On the front

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions

Height of single box in mm	110.0
Width of single box in mm	300.0
Capacity in litres	12
Height of letterbox slot in mm	35.0
Width of letter slot in mm	265.0
Overall height in mm	1200.0 | 1600.0
Total width in mm	400.0
Depth in mm	435.0
Weight in kg	33.0
Delivery condition	Delivery is made in sections; freestanding elements / mailbox delivered separately

Dimension drawing

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Montagebohrungen

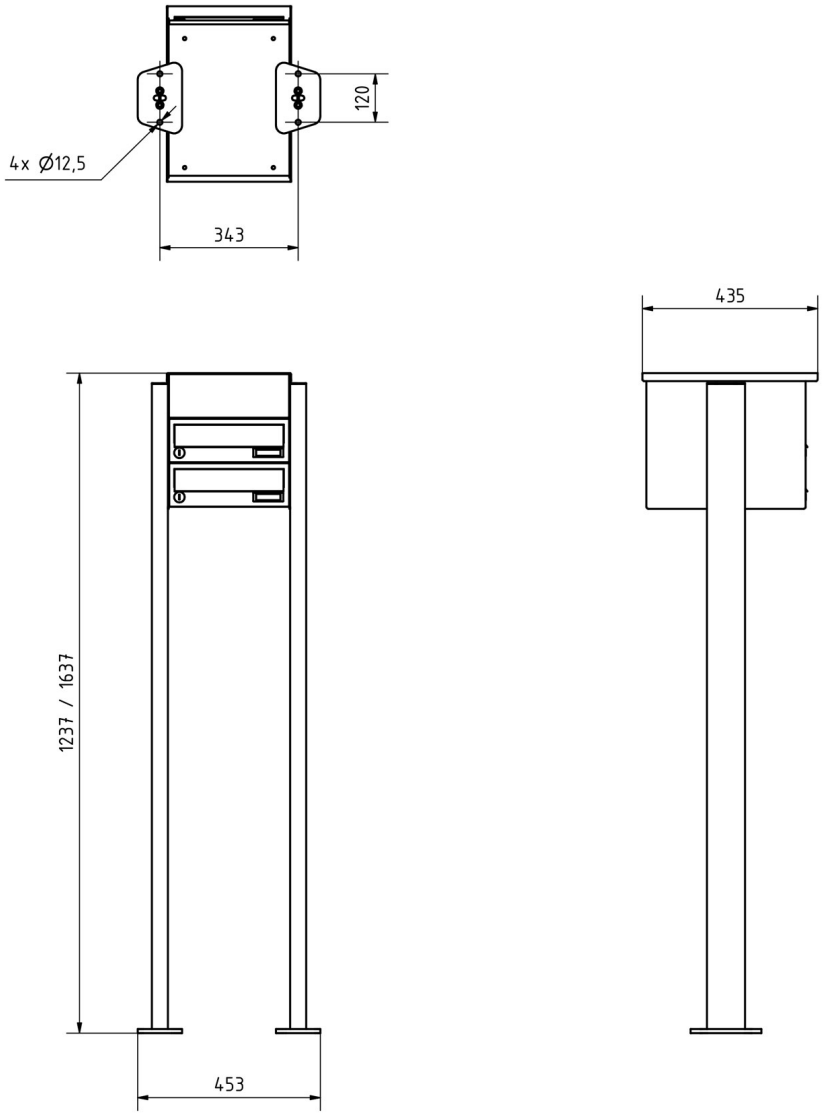

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images









Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618









Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618



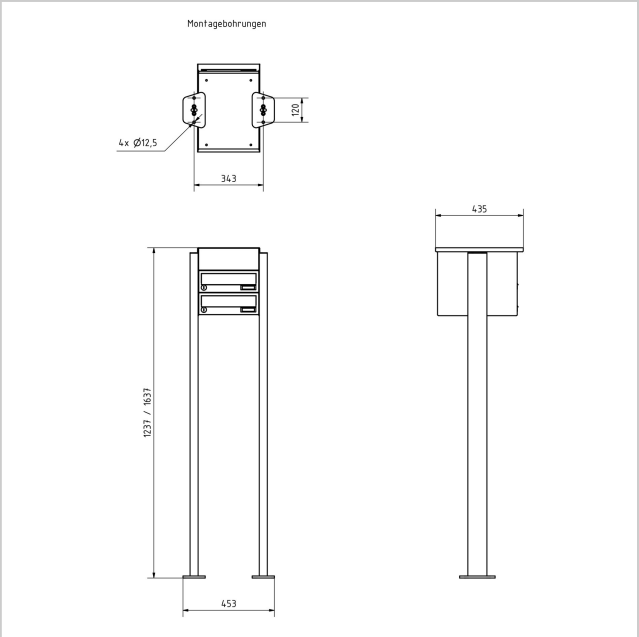

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618