3-compartment freestanding letterbox Design BASIC 385P ST-T with doorbell housing - stainless steel RAL 7016 anthracite | BI-Color brushed stainless steel | RAL 7016 anthracite grey | Top | with 3 mailboxes



Product number 385P-7016VA-3-SP

Product description

Freestanding mailbox system BASIC 385P with bell/intercom unit for 3 households – BI-Colour stainless steel / RAL 7016

The freestanding BASIC 385P mailbox system for 3 households combines 3 separately usable compartments with an integrated bell function box. This brings mail reception, doorbell buttons and the provision for a compatible door intercom system together in a robust, visually cohesive entrance solution for two- and small multi-family houses, office and medical practice buildings. The bell function box is integrated directly into the complete unit.

The mailbox bodies are made of galvanised steel and are powder-coated in RAL 7016 anthracite grey fine-structure matt. Brushed stainless steel insertion flaps create a high-quality BI-Colour accent. The side cladding and rain hood are made of V2A stainless steel and are powder-coated to match in RAL 7016. Particularly distinctive are the solidly manufactured stand elements made from anodised aluminium profile, which are also coated in anthracite grey and give the unit a secure, very robust footing.

Each of the 3 compartments has approximately 12 litres of volume. The 35 × 265 mm insertion opening is designed for DIN C4 items in portrait format. A noise-damping rubber lip reduces the slamming of the insertion flap. Mail is collected from the front; the collection doors open from left to right. Each mailbox is supplied with two keys with key number and a replaceable nameplate below the insertion flap.

The advantages of the BASIC 385P mailbox system at a glance

Integrated bell function box

The system combines 3 mailboxes with 3 stainless steel doorbell buttons and a speaker aperture with a universal adapter. This creates a central, tidy solution for mail and visitor communication.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Solid aluminium stand elements

Solidly manufactured, anodised aluminium profiles form the stable base of the freestanding unit. The powder-coated construction combines high load-bearing capacity with a long-lasting design for outdoor use.

DIN C4 insertion with 12-litre capacity

The mailboxes each offer approx. 12 litres of mail capacity. The 35 × 265 mm insertion opening accepts DIN C4 items in portrait format without larger envelopes needing to be unnecessarily folded.

Prepared for door communication

The speaker aperture with universal adapter is prepared for many commercially available flush-mounted speakers.

BI-Colour stainless steel / RAL 7016

Brushed stainless steel insertion flaps provide a high-quality contrast to the anthracite grey mailbox bodies. The robust combination of materials marries modern aesthetics with long-lasting everyday suitability.

Equipment of the BASIC 385P mailbox system

Mailbox system

Number of mailboxes 3 separately usable compartments
Mailbox dimensions 300 × 110 × 385 mm (W × H × D) per compartment
Mail volume Approx. 12 litres per mailbox
Material Galvanised steel; side cladding and rain hood made of V2A stainless steel
Finish BI-Colour: RAL 7016 anthracite grey with brushed stainless steel insertion flaps
Insertion opening 35 × 265 mm, suitable for DIN C4 portrait
Standard Mailboxes conforming to DIN EN 13724

Bell and intercom section

Bell function box Galvanised steel, powder-coated to match
Position Integrated into the unit
Doorbell buttons 3 round stainless steel doorbell buttons type 4
Speaker aperture With universal adapter for commercially available flush-mounted speakers
Nameplate Designed to be indentation-proof and impact-resistant

Solid aluminium stand elements

Stand elements Solidly manufactured, anodised aluminium profile
Coating Powder-coated in RAL 7016 anthracite grey
Installation methods Either screw mounting or concreting-in
Screw mounting Stand elements selectable in 1200 or 1600 mm
Concreting-in Stand elements selectable in 1600 or 2000 mm
Delivery condition Stand elements and mailbox system delivered divided for assembly
Manufacture Made in Germany by Briefkasten Manufaktur Lippe

Note on the bell/intercom unit

The universal adapter is suitable for many commercially available flush-mounted speakers. The intercom system or built-in speakers, power supply and cabling are not part of the described basic equipment and must be provided to suit the planned system.

Installation on a foundation

For screw mounting, a level and sufficiently load-bearing foundation is required. The fastening materials must be selected to suit the foundation, system weight and local installation conditions.

Installation by concreting in

For the concreting-in version the elongated aluminium stand elements are anchored vertically in a sufficiently sized concrete foundation. Foundation size and embedment depth must be matched to ground conditions, system dimensions and local loads.

Note on weather protection

The rain hood, close-fitting side cladding and rain drainage channels support weather protection. Mail items must be fully inserted so that the insertion flaps can close completely. Under extreme weather conditions, minor moisture ingress may occur despite standard-compliant construction.

Product properties

Material	Steel, galvanised, Aluminium AlMg3 W19, Stainless steel V2A 1.4301
Series	BASIC
Number of bell push buttons	3 buttons
Functions	Light button, Intercom
Functional box prepared for manufacturer	GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, Comelit
Boxes by volume	Normal > 10 litres
Name labelling	Nameplate
Mounting type	Free-standing
Surface/colour	RAL 7016 anthracite grey, Brushed
Removal of mail	On the front
Number of boxes	with 3 letterboxes

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions


Height of single box in mm	110.0
Width of single box in mm	300.0
Capacity in litres	12
Height of letterbox slot in mm	35.0
Width of letter slot in mm	265.0
Overall height in mm	1200.0 | 1600.0
Total width in mm	380.0
Depth in mm	435.0
Weight in kg	38
Delivery condition	Delivery is made in blocks; freestanding elements / mailbox delivered separately.

Dimension drawing

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

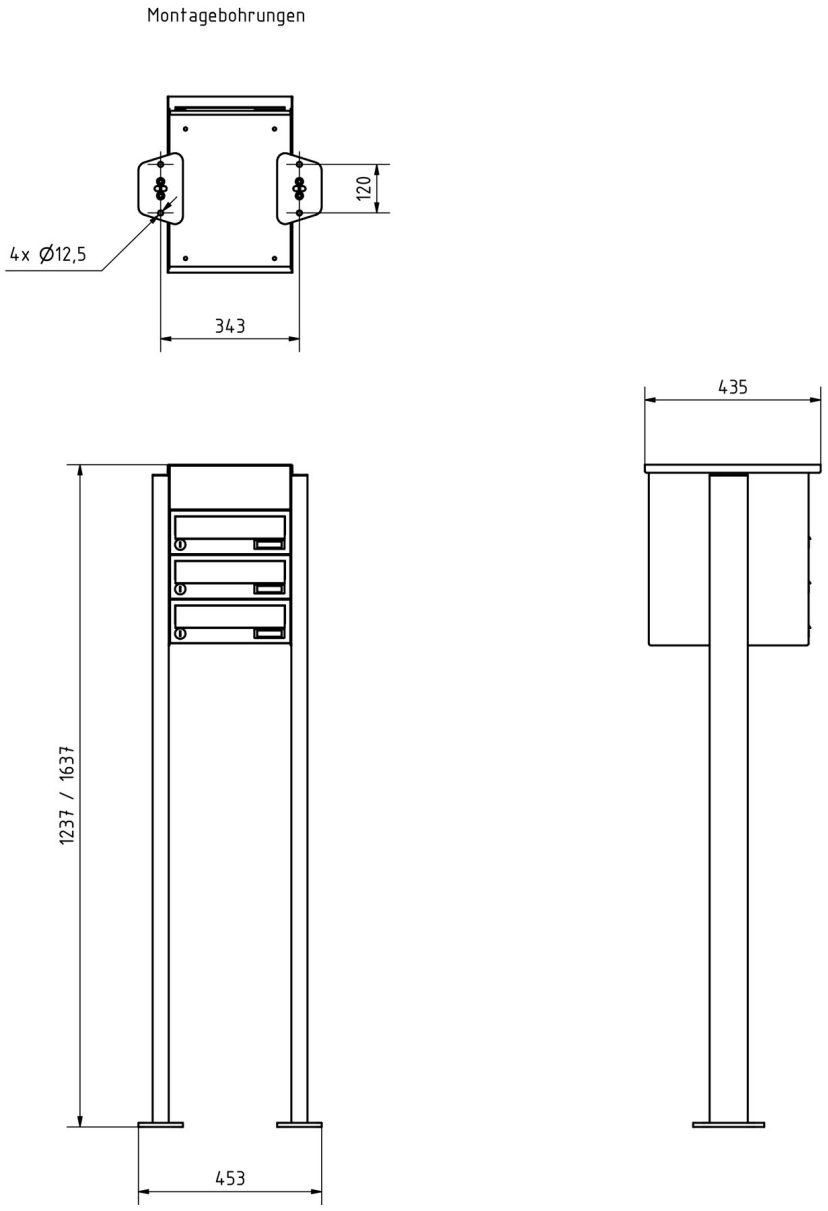

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images










Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

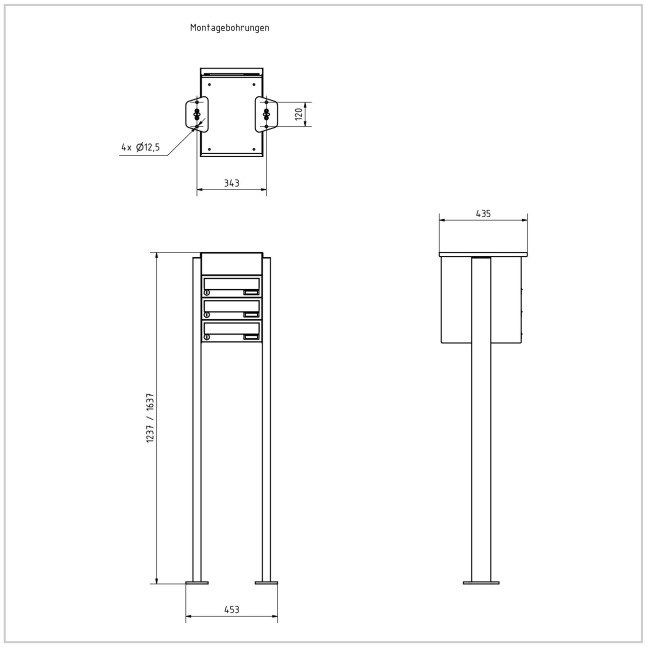







Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618