7-compartment freestanding mailbox Design BASIC 385P-9016 ST-T with doorbell box - RAL 9016 traffic white | RAL 9016 Traffic White, fine-textured matt | Left | with 7 mailboxes



Product number 385P-9016-7S-SP-L

Product description

Freestanding mailbox system BASIC 385P with bell/intercom unit on the left for 7 households – RAL 9016 Traffic White – narrow version

The freestanding BASIC 385P mailbox system for 7 households combines 7 separately usable mail compartments with an integrated bell function enclosure. This brings together mail reception, doorbell buttons and the provision for a compatible door intercom system in a robust, visually unified entrance solution for larger apartment buildings, residential complexes and commercial properties. In this variant the bell/intercom unit is positioned to the left of the mailbox system.

The mailboxes are made of galvanised steel and are powder-coated in RAL 9016 Traffic White fine-textured matt. A close-fitting side cladding with rain canopy and integrated rain drainage channels supports weather protection. The solidly manufactured support elements of anodised aluminium profile are also powder-coated in RAL 9016 Traffic White and form a particularly stable, durable base for the freestanding system.

Each of the 7 mail compartments has approx. 12 litres capacity. The 35 × 265 mm deposit slot is designed for DIN C4 items in portrait format. A noise-damping rubber lip reduces the impact of the deposit flap. Mail is collected from the front; the access doors open from left to right. Each mailbox is supplied with two keys with key number and a changeable nameplate below the deposit flap.

Benefits of the BASIC 385P mailbox system at a glance

Integrated bell function box on the left

The system combines 7 mailboxes with 7 stainless steel bell push-buttons and a speaker aperture with universal adaptor. This creates a central, tidy solution for mail and visitor communication.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Solid aluminium support elements

Solidly manufactured, anodised aluminium profiles form the stable base of the freestanding system. The powder-coated construction combines high load capacity with a durable design for outdoor use.

DIN C4 deposit with 12 litre capacity

The mailboxes each offer approx. 12 litres of mail volume. The 35 × 265 mm deposit slot accepts DIN C4 items in portrait format without the need to unnecessarily fold larger envelopes.

Prepared for door communication

The speaker aperture with universal adaptor is prepared for many commercially available flush-fit speakers.

Robust BASIC quality in RAL 9016 Traffic White

Galvanised steel, stainless steel components, solid aluminium support elements and German manufacturing result in a resilient mailbox system for long-term use at the property entrance.

Specification of the BASIC 385P mailbox system

Mailbox system

Number of mailboxes 7 separately usable mail compartments
Mailbox dimensions 300 × 110 × 385 mm (W × H × D) per compartment
Mail volume Approx. 12 litres per mailbox
Material Galvanised steel; side cladding and rain canopy made of stainless steel V2A
Finish RAL 9016 Traffic White fine-textured matt
Deposit slot 35 × 265 mm, suitable for DIN C4 portrait
Standard Mailboxes conforming to DIN EN 13724

Bell and intercom unit

Bell function enclosure Galvanised steel, powder-coated to match
Position Left
Bell push-buttons 7 round stainless steel bell push-buttons Type 4
Speaker aperture With universal adaptor for commercially available flush-fit speakers
Nameplate Tamper-proof and impact-resistant design

Solid aluminium support elements

Support elements Solidly manufactured, anodised aluminium profile
Coating Powder-coated in RAL 9016 Traffic White
Installation types Optionally screw mounting or concreting-in
Screw mounting Support elements available in 1200 or 1600 mm
Concreting-in Support elements available in 1600 or 2000 mm
Delivery condition Support elements and mailbox system delivered in assembly-ready sections
Manufacture Made in Germany by Briefkasten Manufaktur Lippe

Note on the bell/intercom unit

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

The universal adaptor is suitable for many commercially available flush-fit speakers. Intercom systems or flush-fit speakers, power supply and cabling are not part of the described basic equipment and must be provided to suit the planned system.

Installation on a foundation

For screw mounting a level and sufficiently load-bearing foundation is required. The fixings must be chosen to suit the foundation, system weight and local installation conditions.

Installation by concreting?in

For the concreting-in version the extended aluminium support elements are anchored plumb in a sufficiently dimensioned concrete foundation. Foundation size and embedment depth must be adapted to ground conditions, system dimensions and local loads.

Note on weather protection

The rain canopy, close-fitting side cladding and rain drainage channels support weather protection. Postal items must be fully inserted so that the deposit flaps can close completely. Under extreme weather conditions, small amounts of moisture may penetrate despite compliant construction.

Product properties

Material	Steel, galvanised, Aluminium AlMg3 W19, Stainless steel V2A 1.4301
Series	BASIC
Number of bell push buttons	7 buttons
Functions	Light button, Intercom
Functional box prepared for manufacturer	GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, Comelit
Boxes by volume	Normal > 10 litres
Name labelling	Nameplate
Mounting type	Free-standing
Number of boxes	with 7 letterboxes
Removal of mail	On the front
Surface/colour	RAL 9016 traffic white

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions


Height of single box in mm	110.0
Width of single box in mm	300.0
Capacity in litres	12
Height of letterbox slot in mm	35.0
Width of letter slot in mm	265.0
Overall height in mm	1200.0 | 1600.0
Total width in mm	700.0
Depth in mm	435.0
Weight in kg	63
Delivery condition	Delivery is made in blocks; stand elements / mailbox are delivered separately.

Dimension drawing

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

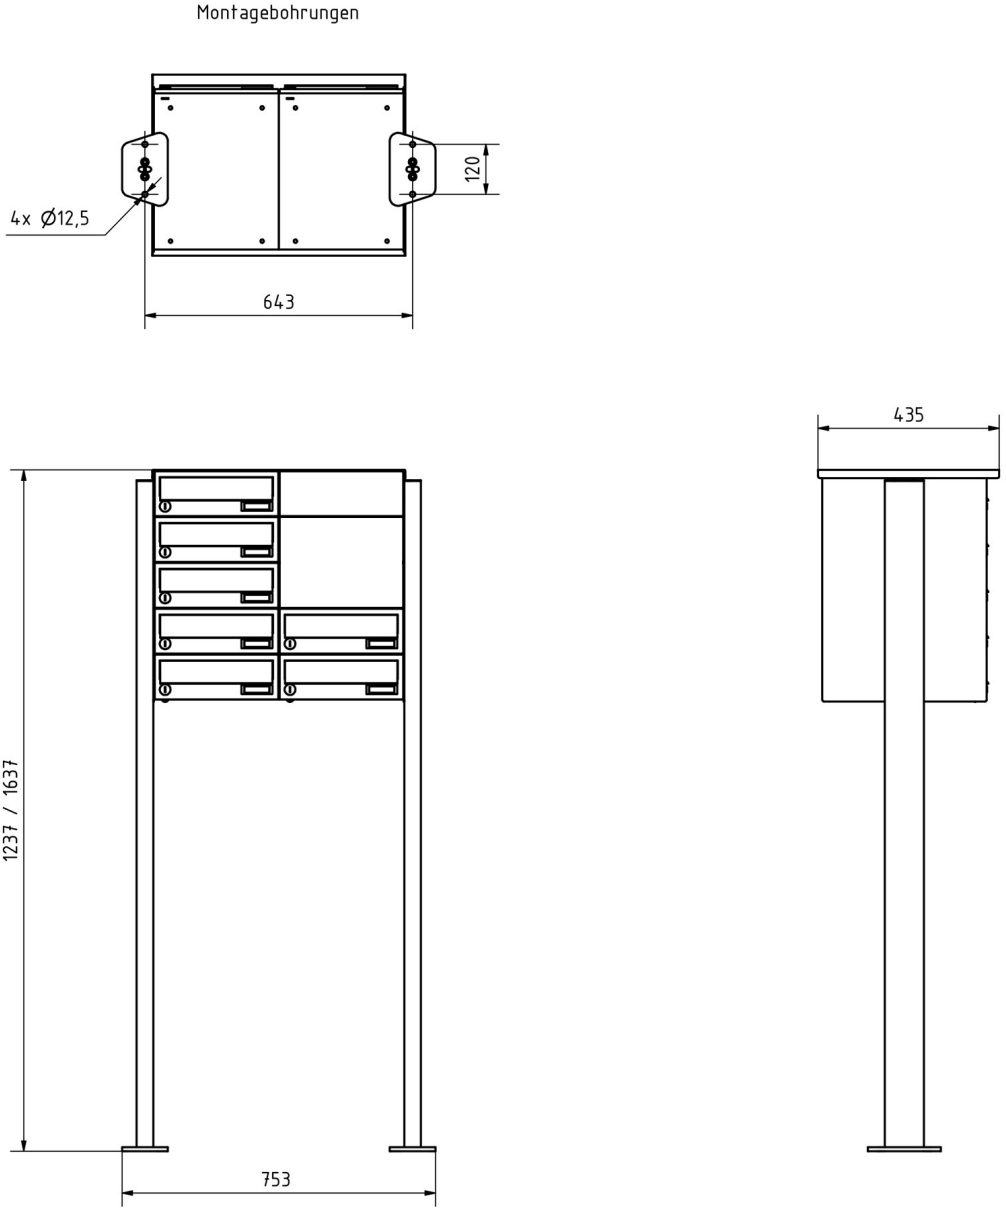

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images










Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618



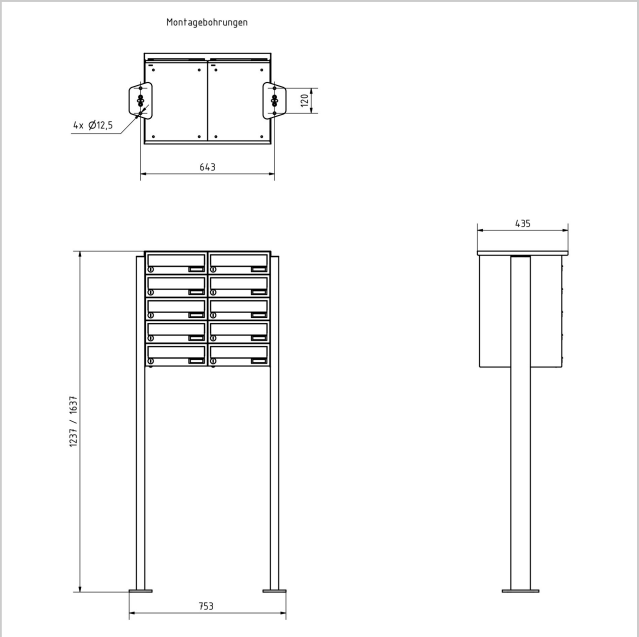

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618