Designer surface-mounted mailbox GOETHE AP, side entry, with GIRA System 106 - RAL colour of your choice - AUDIO complete set | Right | without newspaper compartment | Gira System 106 complete set Audio 2DB



Product number 215-AP-1-SPS-KSAGI106-R

Product description

Design surface-mounted mailbox GOETHE® AP, side-mounted, with GIRA System 106 - RAL colour of your choice - AUDIO complete set

High-quality surface-mounted mailbox with seamlessly integrated GIRA System 106 in a flush-fit design. The modern GOETHE® mailbox is ideal for a sophisticated entrance area. The clean-lined design without a visible lock gives this mailbox a particularly elegant appearance. 3 GIRA system modules are included, so the mailbox can be used immediately. The matching GIRA apartment station and the control unit to complete this mailbox are included. The modules can be replaced at any time via the simple mounting system.

The dimensions of the single compartment provide a capacity of approx. 16 litres; the large aperture ensures that DIN C4 envelopes and magazines — or post accumulated during several days' absence — are not creased. The innovative push-key lock is concealed inside the mailbox. The key is simply inserted into the opening (no turning required) and the door opens. With the lock positioned as it is, the collection door is designed to prevent the mail from falling out towards you. Thanks to the water-drip edge, the post stored inside is optimally protected from the weather. The insertion flap is fitted with high-quality hinge dampers, ensuring quiet closing and preventing rattling caused by weather conditions.

The surface-mounted mailbox systems of the GOETHE® collection are characterised by the consistent use of stainless steel and aluminium. The result is very high durability and sustainability. The construction was developed by our own engineers with a focus on high flexibility/modularity, simple spare-part installation and uncomplicated self-installation. Spare parts for all GOETHE® systems are available directly in our shop.

Thanks to the design, self-installation is straightforward.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- High-quality surface-mounted mailbox made of stainless steel and aluminium.
- Quality manufacturing - Made in Germany by Briefkasten Manufaktur Lippe.
- Mailbox (W x H 400 x 400 mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in a RAL colour of your choice.
- Innovative push-key lock with 2 keys.
- Letter insertion and removal from the front. Insertion flap with high-quality hinge dampers for very quiet mail insertion.
- The mailbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 horizontally; large envelopes fit without bending.
- Collection door opens from top to bottom. This prevents the mail from falling out towards you.
- Optionally available with house number and name inscription, laser-engraved.
- Function box (W x H 200 x 400 mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in a RAL colour of your choice.
- Doorbell nameplate made of stainless steel, powder-coated in RAL colour. A bell is laser-engraved on the nameplate for better recognisability.
- Optimal protection from rain through drip edges and a rain canopy made of 3 mm aluminium AlMg3 W19, powder-coated in a RAL colour of your choice.
- Side cladding made of 3 mm aluminium AlMg3 W19, powder-coated in a RAL colour of your choice.
- Incl. mounting rail for wall installation.
- Including GIRA apartment station and control unit; System 106 door station module installed.

GIRA

Door station module Gira System 106 - 5565 920, installed without wiring

- Compact audio module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good intelligibility.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. required from the 3rd camera module).
- All other System 106 modules (except the audio module) are powered via the door station module.

Apartment station AP Gira 1250XX, included

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Fully preassembled surface-mounted apartment station, enabling quick and tidy installation.
- Design variety through integration into the switch programme, providing a consistent appearance for door communication and electrical installation.
- Can be mounted with or without a cover frame.
- Easy installation via plug-in screw terminals on the mounting plate. Contact to the apartment station is made when the station is pushed onto the mounting plate.
- Easy removal of the apartment station during renovation work.
- Mounting holes for installation.
- Signal transmission and power supply to the apartment station via a polarity-proof and short-circuit-proof 2-wire bus.
- Parallel connection of up to three apartment stations possible (when powered via 2-wire bus).
- Single-person commissioning via a simple start-up procedure.
- Call-tone differentiation between door call, internal call and floor call.
- Selection of five different ringtones, which can be individually assigned to the call buttons.
- Hands-free function (voice-controlled duplex communication with echo and background noise suppression).
- Override function for loud ambient noise during the conversation.
- Anti-eavesdropping function.
- Control buttons with integrated LEDs for status indication.

Audio control unit REG Gira 128700, included

- Supplies the polarity-proof and short-circuit-proof 2-wire bus.
- Self-resetting electronic short-circuit and overload detection for the operating voltages and the bus connection.
- Buttons for system and door-opener programming.
- LED status indicators for operation, overload, system programming and door-opener programming.
- AC 12 V output for powering a standard door opener.
- Permanent AC 12 V output for powering a TKS-TK gateway.
- Relay output to switch a door opener with its own power supply.
- Door opener switching time continuously adjustable from 1 to 10 s.

Important information

Preparation for camera or intercom stations

The intercom systems must be connected by a qualified electrician. For planning, installation and commissioning, please contact the electrician of your choice.

Water protection

In order to achieve optimal water protection for your mail, the mailbox or mailbox system should, where possible, be located under a canopy.

Mail is only protected from water if it is placed completely inside the box and the insertion flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the mailbox. This unit is protected against water ingress according to DIN EN 13724. Water ingress is not grounds for a complaint.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Intercom
Functional box prepared for manufacturer	GIRA
Material	Aluminium AlMg3 W19, Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Surface-mounted

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions


Height of single box in mm	400,0
Width of single box in mm	400,0
Capacity in litres	16
Height of letterbox slot in mm	35,0
Width of letter slot in mm	360,0
Total width in mm	608,0
Depth in mm	100.0 + 25.0 Rain roof
Weight in kg	21
Delivery condition	Delivery is assembled

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimension drawing

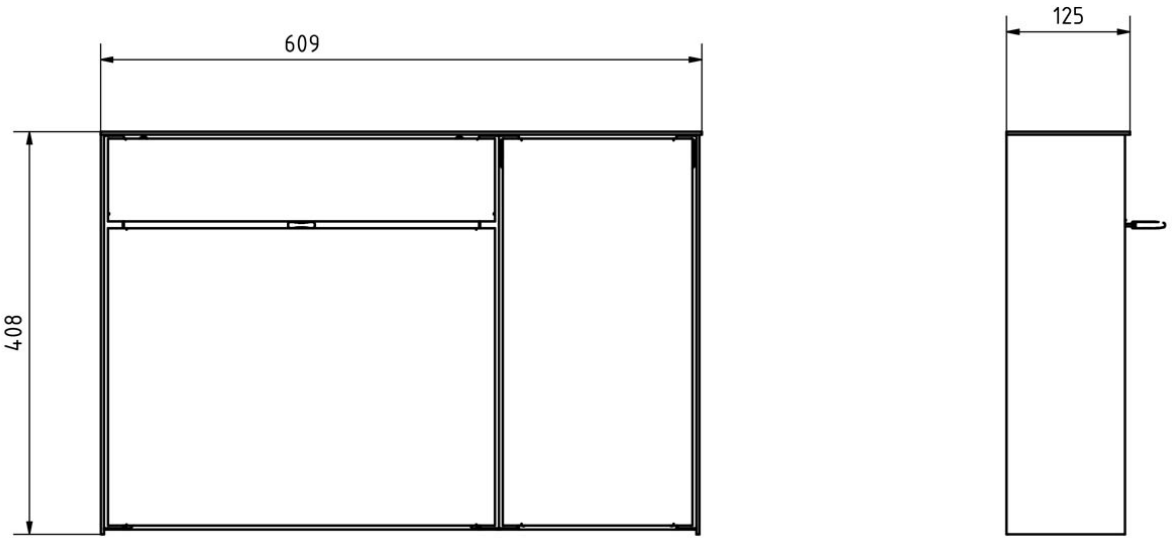

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110


Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images





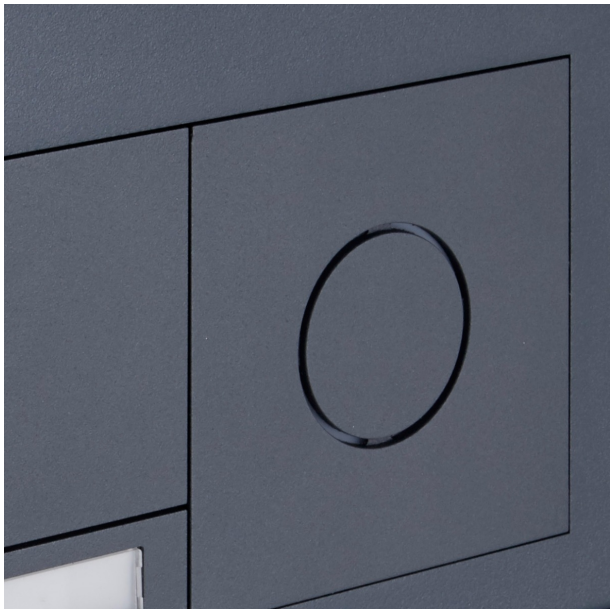

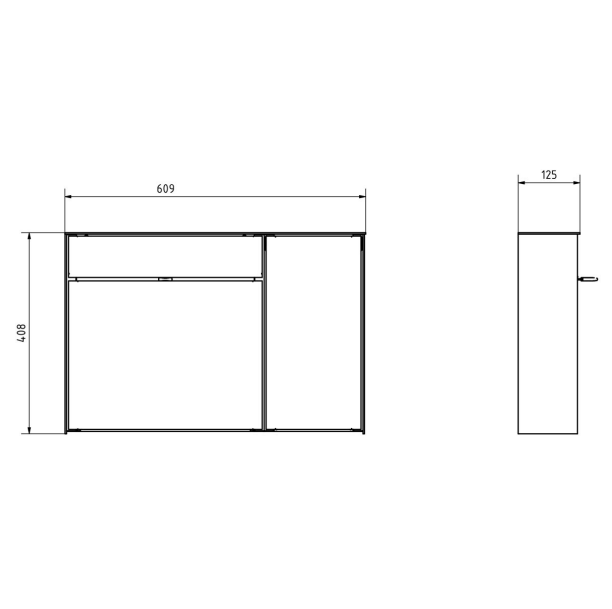


Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618



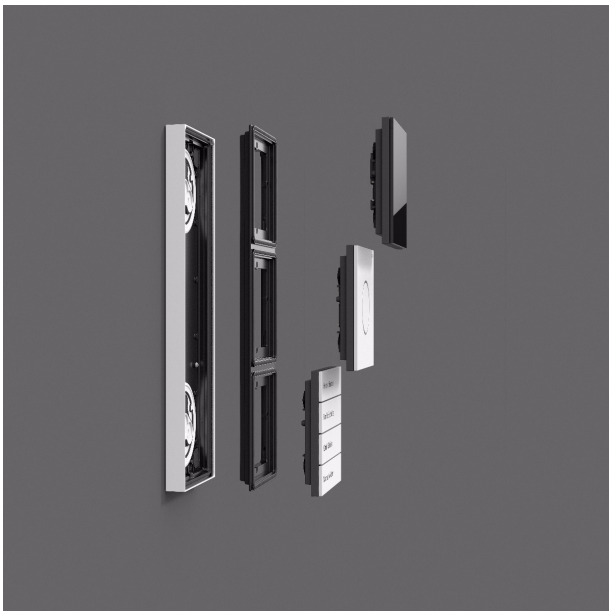





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618