Designer surface-mounted mailbox GOETHE AP - RAL colour of your choice - GIRA System 106 side-mounted - Video complete set | Right | without newspaper compartment | Gira System 106 Complete Video Set 2DB



Product number 215-AP-1-SPS-KSGI106-R

Product description

Design surface-mounted mailbox GOETHE® AP - RAL colour of your choice - GIRA System 106 side-mounted - VIDEO complete set

High-quality surface-mounted mailbox with seamlessly integrated GIRA System 106 side-mounted in a flush design. The modern GOETHE® mailbox is ideal for a discerning entrance area. The straight-lined form without a visible lock gives this mailbox an especially elegant appearance. 3 GIRA System modules are included so the mailbox can be used immediately. The matching GIRA apartment station and the control unit to complete this mailbox are included. The modules can be exchanged at any time afterwards using the simple mounting system.

The dimensions of the single box provide a capacity of approx. 16 litres; the large aperture ensures that C4 envelopes and magazines, or post accumulated during several days' absence, remain uncreased. The innovative push-key lock is hidden invisibly inside the mailbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the position of the lock this mailbox is designed so that the collection door prevents the post from falling towards you. The water runoff edge provides optimal protection for the interior post against the weather. The mail flap is equipped with high-quality hinge dampers, ensuring quiet closing and preventing annoying rattling due to weather influences.

The surface-mounted mailbox systems of the GOETHE® collection are characterised by the consistent use of stainless steel and aluminium. The result is very high durability and sustainability. The construction has been developed by our own engineers with a view to high flexibility and modularity, easy spare-part assembly and straightforward self-installation. Spare parts for all GOETHE® systems are available directly in our shop.

Thanks to the design, self-installation is uncomplicated.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- High-quality surface-mounted mailbox made of stainless steel and aluminium.
- Quality manufacturing - Made in Germany by Briefkasten Manufaktur Lippe.
- Mailbox (BH 400x400 mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Innovative push-key lock with 2 keys.
- Mail insertion and collection from the front. Insertion flap with high-quality hinge dampers for very quiet mail insertion.
- The mailbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 landscape; large letters can be inserted without folding.
- Collection door opens from top to bottom. This prevents your post from falling towards you.
- Function box (BH 200x400 mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Nameplate made of stainless steel, powder-coated in RAL colour. Your name and/or a bell will be laser-engraved on the nameplate as required.
- Optionally with laser-engraved house number (a name inscription can also be stored here).
- Optimal rain protection thanks to runoff edges and a rain hood made of 3 mm aluminium AlMg3 W19, powder-coated in RAL colour of your choice.
- Side panel made of 3 mm aluminium AlMg3 W19, powder-coated in RAL colour of your choice.
- Includes mounting rail for wall mounting.
- Includes GIRA apartment station & control unit, System 106 door station module, info module & camera module installed.

GIRA

Camera module Gira System 106 - 5561 000, installed without cabling

- A high-quality camera with high light sensitivity is concealed behind the replaceable black glass pane. With a field of view of 100° the user always has a clear view of what is happening at their front door.

Info module Gira System 106 - 5560 920, installed

- For house numbers that should be displayed clearly and prominently.

Door station module Gira System 106 - 5565 920, installed without cabling

- Compact voice module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof speaker ensure good intelligibility.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. required from the 3rd camera module onwards).
- All other System 106 modules (except the voice module) are powered via the door station module.

Apartment station Gira Video AP 7 1209xx, included

- Video apartment station with a 17.78 cm (7") TFT colour display and convenient hands-free function for surface-mounted installation or wall mounting with a flush-mounted back box or hollow-wall box. With the optional stand (see Accessories) it is also suitable for placement on furniture. A 32 GB SD memory card is included for internal image storage. Full-surface glass front with touch functionality and tactile feedback.

Video control unit REG Gira 128800, included

- Control unit for supplying the audio and video components of the Gira door communication bus.
- Supplies the polarity-protected and short-circuit-proof 2-wire bus when using video components such as a colour camera and TFT colour display.
- Up to 2 door stations with colour camera and 28 apartment stations with TFT colour display can be supplied via the video control unit.
- In total, up to 15 colour cameras can be controlled by the video control unit (5 video door stations and 10 TKS camera gateways), of which two door stations with colour camera can be powered by the video control unit. The remaining colour cameras must each be operated with their own power supply for door communication.
- Self-resetting electronic short-circuit and overload detection for the operating voltages and the bus connection.
- Buttons for system and door opener programming.
- LED status indicators for operation, overload, system programming and door opener programming.
- AC 12 V output for powering a conventional door opener.
- Relay output for switching a door opener with its own power supply.
- Door opener switching time continuously adjustable from 1 to 10 s.

Important information

Camera or intercom preparation

The intercom systems must be connected by a qualified electrician. Please consult the electrician of your choice for planning, installation and commissioning.

Water protection

For optimal protection of your post from water, the mailbox or mailbox system should, if possible, be located under a porch.

Mail is protected from water only if it is placed completely inside the box and the insertion flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the mailbox. This unit is protected against water ingress in accordance with DIN EN 13724. Water ingress is not a reason for complaint.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Camera, Intercom
Functional box prepared for manufacturer	GIRA
Material	Aluminium AlMg3 W19, Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Surface-mounted

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions


Height of single box in mm	BK 400.0 | FK 400.0
Width of single box in mm	BK 400.0 | FK 200.0
Capacity in litres	16
Height of letterbox slot in mm	35,0
Width of letter slot in mm	360,0
Height of letterbox in mm	400,0
Width of letterbox system in mm	600,0
Total width in mm	408,0
Depth in mm	100.0 + 25.0 Rain roof
Weight in kg	19
Delivery condition	Delivery is assembled

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimension drawing

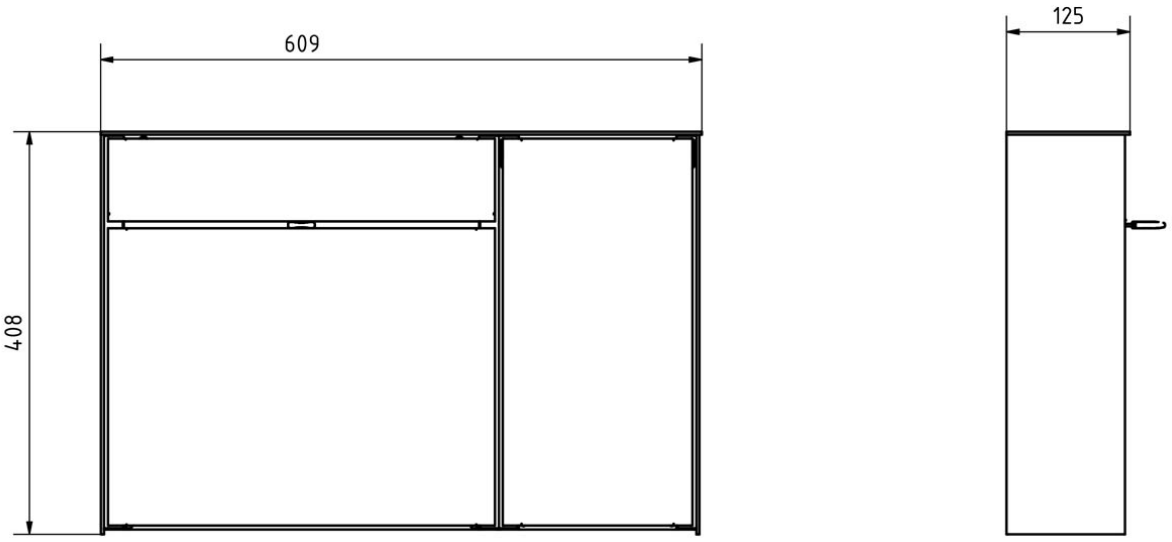

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110


Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images





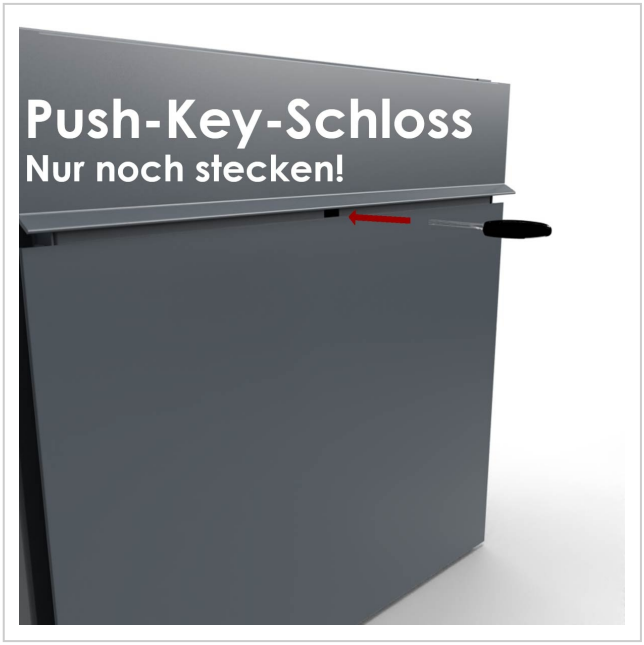


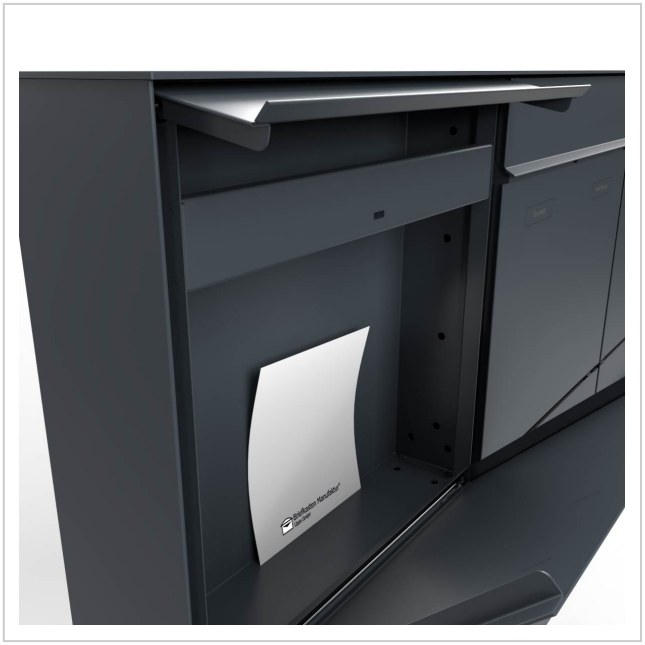

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

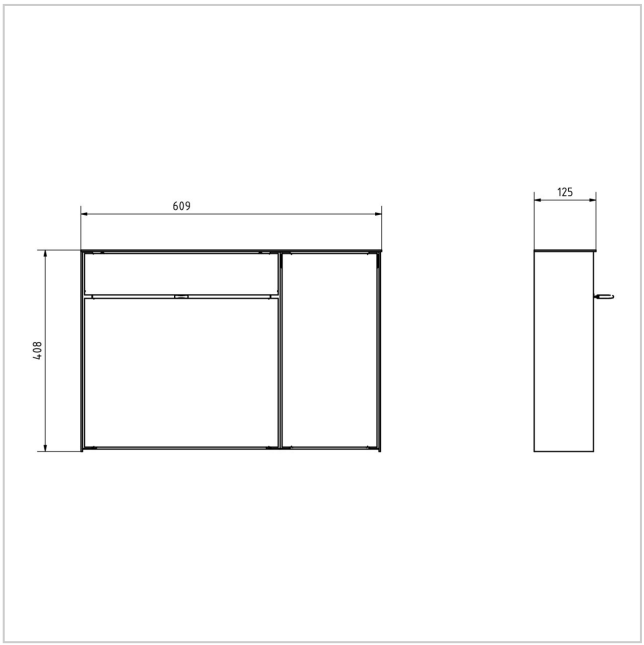





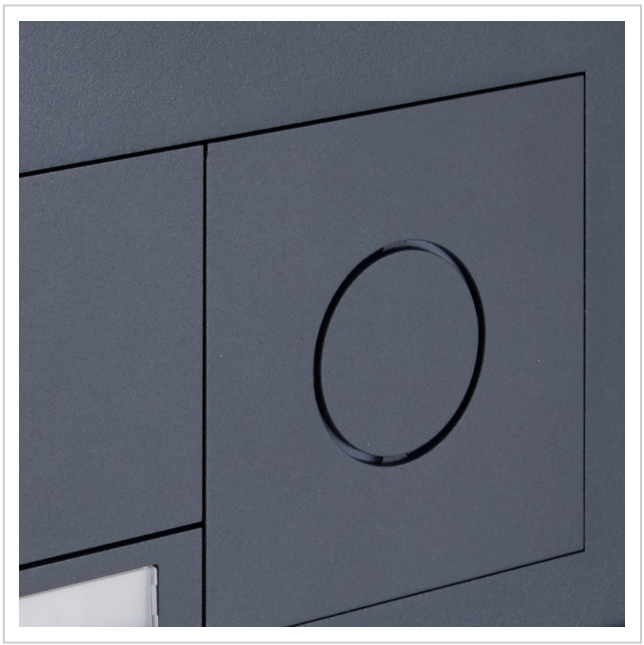

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618