Design flush-mounted letterbox GRIMM - Colour of your choice - GIRA System 106 - Video intercom left - VIDEO complete set | Left | ? Colour of your choice | Gira System 106 Complete Video Set 2DB | Flush-mounted



Product number 562-UP-SPL-1-SF-GI106KS

Product description

Design Mailbox GRIMM® – A Masterpiece of Mailbox Manufacturing

The Design In-wall Mailbox GRIMM combines modern design with top-quality craftsmanship – ideal for discerning builders and architects seeking an elegant solution for integrating the Gira System 106. Manufactured from high-quality stainless steel and completely "Made in Germany" by the Lippe Mailbox Manufacturing, this model represents durability, functionality, and stylish aesthetics. The powder-coated front panel made of 2 mm stainless steel V2A (1.4301) in a custom colour impresses with its timeless appearance and high corrosion resistance. The flush design allows for seamless integration of up to three GIRA 106 system modules via a cleverly thought-out mounting system. Three GIRA system modules are included, so the mailbox can be installed directly. The matching GIRA apartment station and control unit to complete this mailbox are included. The modules can be easily exchanged later using the simple mounting system.

The mailbox GRIMM® is not only an optical highlight but also excels in functionality and quality. Thanks to the innovative push-key lock, the mailbox can be easily and comfortably operated with one hand. Open the door with a press and close it without the use of a key. The lock is optimally protected from weather influences. Additionally, the mailbox features an intelligent retrieval system: the door opens from top to bottom, ensuring that the mail remains securely inside and does not fall out. The mail can also be comfortably inserted from the front, with high-quality axle dampers ensuring a gentle closing of the mail slot. Uniquely, the GRIMM features a dual box system: the installation box can be installed during the rough construction phase, while the front panel is mounted only after the construction work is completed – providing maximum flexibility for the future and protection against dirt and dust during construction. The insertion box is made of stainless steel 1.4016 and features pre-punched cable entries on all sides for easy electrical installation.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Thanks to DIN/EN 13724 standards, the GRIMM is ideally suited for large letters in C4 format, which can be inserted without creases. The mailbox GRIMM® impresses with its durable quality, timeless design, and well-thought-out functionality.

- High-quality mailbox entirely made of stainless steel for in-wall installation.
- Front panel made of 2 mm stainless steel V2A 1.4301, powder-coated.
- Quality manufacturing – Made in Germany by Lippe Mailbox Manufacturing.
- Includes GIRA apartment station & control unit, System 106 door station module, info module & camera module installed.
- Innovative push-key lock including 2 keys with key number, pleasant locking without a key, optimally protected from weather.
- The retrieval door with opening limiter opens from top to bottom to prevent mail from falling out.
- Front insertion with high-quality axle dampers for very quiet mail insertion.
- DIN/EN 13724 compliant mailbox, insertion size (3.5 cm x 32.5 cm) for C4 landscape – even large letters remain intact. Additional retrieval protection made of stainless steel integrated.
- Optimal weather protection through a recessed panel.
- Dual box system: Ideal for in-wall installation. The panel can be conveniently installed after the completion of construction works.
- Insertion box made of stainless steel 1.4016 (non-corrosive, magnetic stainless steel) with pre-punched cable entries on all sides.

GIRA

Camera Module Gira System 106 - 5561 000

- Behind the interchangeable black glass panel lies a high-quality camera with high sensitivity. With a viewing angle of 100°, the user is always aware of what is happening in front of their door.

Info Module Gira System 106 - 5560 920

- For house numbers that need to be displayed prominently.

Door Station Module Gira System 106 - 5565 920

- Compact audio module with integrated call button for communication between inside and outside.
- A high-quality microphone and weatherproof speaker ensure good communication.
- Power supply via 2-wire bus. Additional connection for ZV (e.g., necessary from 3rd camera module).
- All other System 106 modules (except audio module) are powered via the door station module.

Apartment Station Gira Video AP 7 1209xx

- Video apartment station with a 17.78 cm (7") TFT colour display and comfortable hands-free function for surface mounting or wall mounting with in-wall device box or cavity wall box. With the optional stand (see accessories), also suitable for placement on furniture. A 32 GB SD memory card is included for internal image storage. Full-glass front with touch functionality and tactile feedback.

Control Unit Video REG Gira 128800

- Control unit for powering the audio and video components of the Gira door communication bus.
- Power supply for the reverse polarity and short-circuit proof 2-wire bus when using video components such as colour camera, TFT colour display.
- Up to 2 door stations with colour camera and 28 apartment stations with TFT colour display can be powered via the video control unit.
- In total, up to 15 colour cameras can be controlled by the video control unit (5 video door stations and 10 TKS camera gateways), of which two video door stations with colour cameras can be powered by the video control unit. The other colour cameras must be operated with their own power supply for door communication.
- Self-resetting electronic short-circuit and overload detection of the operating voltages and bus connection.
- Buttons for system and door opener programming.
- LED status indicators for operation, overload, system programming, and door opener programming.
- AC 12 V output for powering a standard door opener.
- Relay output for switching a door opener with its own power supply.
- Door opener switching time continuously adjustable from 1 to 10 seconds.

Important Information:

To achieve optimal water protection for your mail, the mailbox or mailbox system should ideally be placed under a canopy.

The mail is only protected from water if it is completely placed inside the mailbox and the mail slot is closed. Mail that is not fully inserted allows moisture and dirt to enter the mailbox. This system is protected against water ingress according to DIN EN 13724. Water ingress is not a reason for complaint.

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GRIMM
Connection technology	2-wire
Number of bell push buttons	1 Taster
Functions	Camera, Intercom
Functional box prepared for manufacturer	GIRA
Material	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Flush-mounted

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions


Height of single box in mm	460.0
Width of single box in mm	560.0
Capacity in litres	26.0
Height of letterbox slot in mm	35.0
Width of letter slot in mm	325.0
Height of letterbox in mm	External dimensions 500.0 | Installation dimensions 460.0
Width of letterbox system in mm	Outer dimensions 600.0 | Installation dimensions 560.0
Depth in mm	150.0
Weight in kg	19
Delivery condition	Delivery is made assembled.

Dimension drawing

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

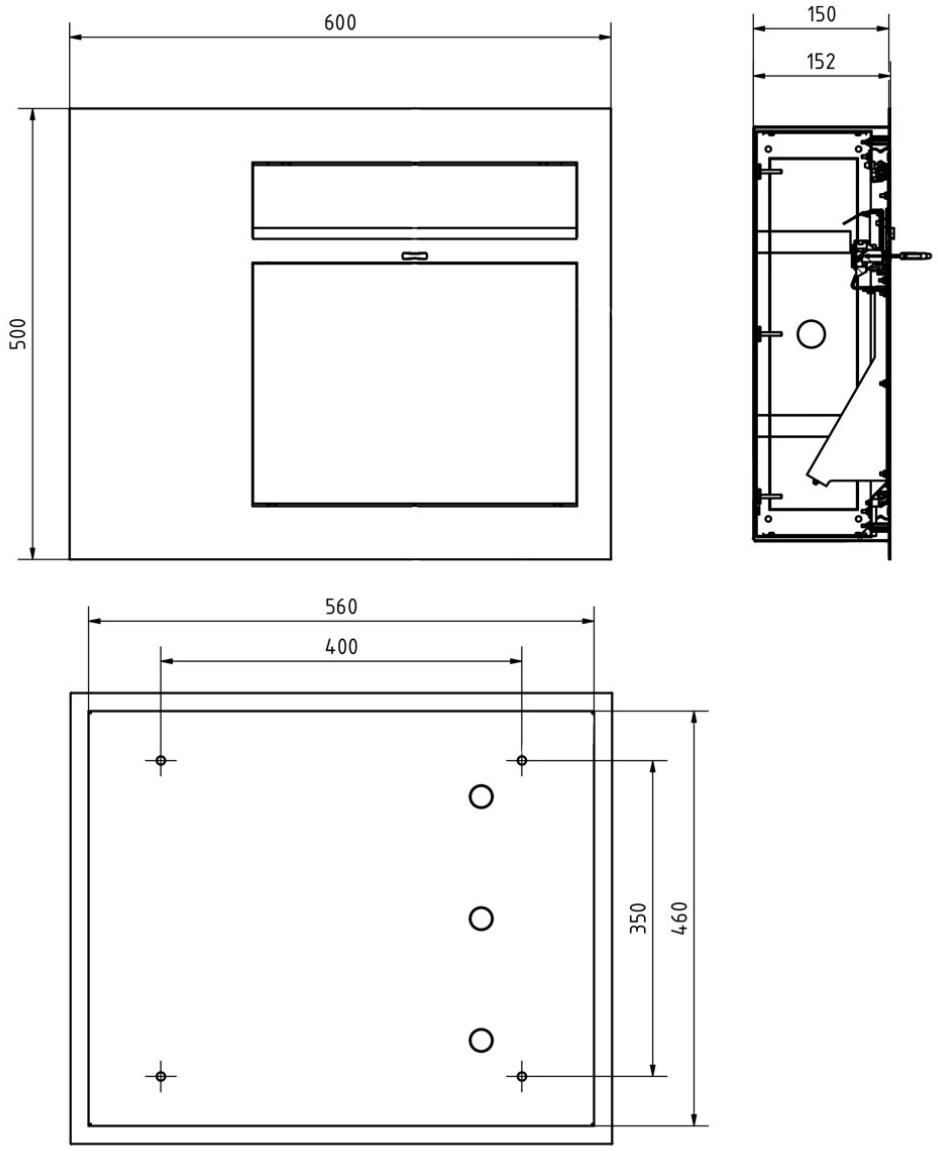


Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images

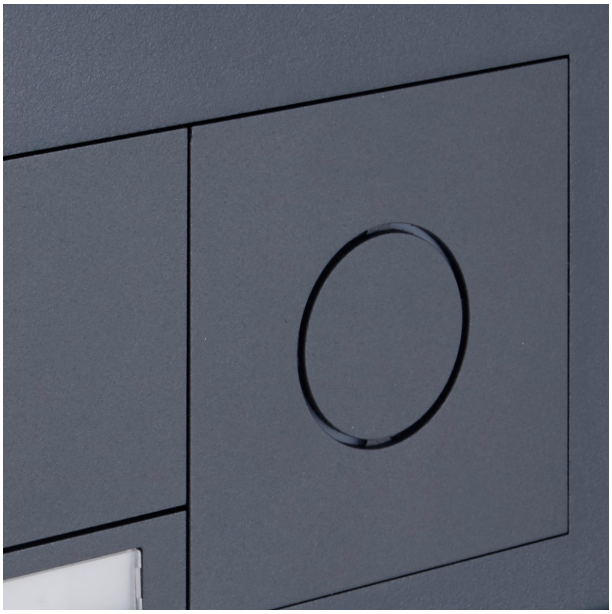







Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618







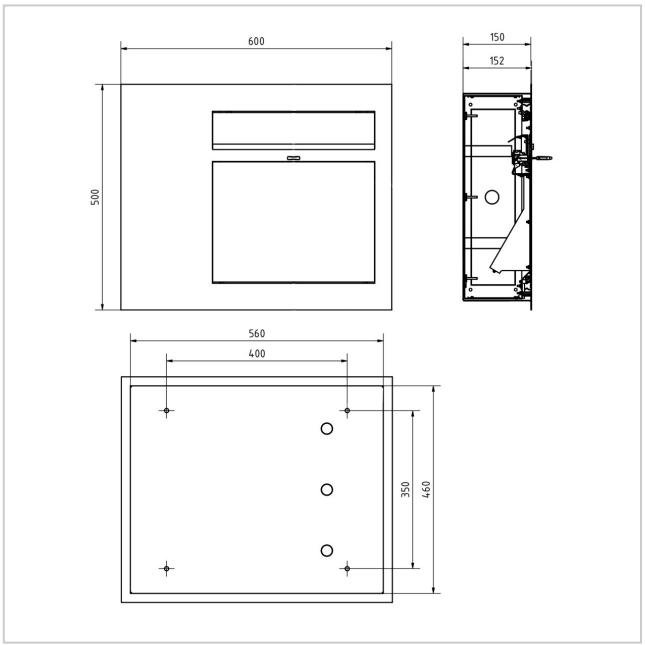

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618



Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618