
Gira IP video apartment station without Wi?Fi in black | Black

Product number 123805

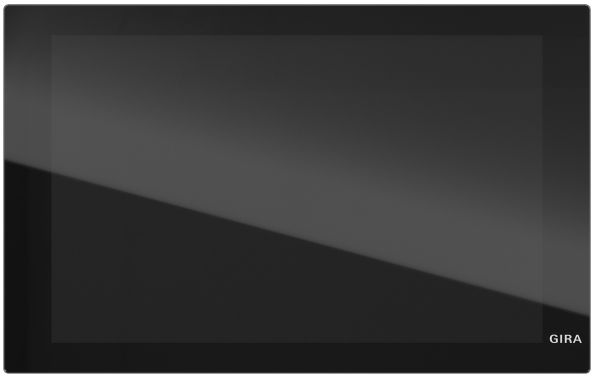

Product description

Gira Video IP indoor station without Wi-Fi in black

The Gira Video IP indoor station without Wi-Fi is designed for internal communication within the Gira IP door communication system. It combines a 7-inch HD colour display with modern touch control and is suitable for high-quality door communication solutions in residential and commercial buildings. The station is supplied as a fully preassembled unit and is intended for wall mounting in a double-gang flush-mounted box.

The large-format display with a full-surface glass front provides comfortable operation for indoor use. Thanks to the hands-free function and the wide viewing angle, the indoor station is particularly convenient to use in everyday situations. The integrated SIP function supports deployment in modern IP-based door communication systems.

The indoor station is intended for the Gira IP door communication system and for use with the TKS-IP gateway. In addition, a potential-free input is provided for connecting a storey call button. This makes the device suitable for applications where, alongside video door communication, a clean integration into existing building structures is required.

Power is supplied via Power over Ethernet. An RJ45 network port is provided for integration. According to Gira, the item will be available as a new product from March 2026. For installation, the MJ RJ45 Cat.6A is stated as a required accessory.

Features

- Indoor station for Gira IP door communication in black
- Suitable for use with TKS-IP gateway
- Fully preassembled unit with 17.78 cm (7") HD colour display
- Convenient hands-free function
- Full-surface glass front with touch functionality
- Wide viewing angle from various directions
- Potential-free input for connecting a storey call button
- Wall mounting in a double-gang flush-mounted box
- SIP client integrated

Technical data

Power supply PoE	PoE power class 0, DC 48 V, IEEE 802.3af
Maximum power consumption	8 W
Typical power consumption	4 W
Network connection	RJ45
Power supply connection	2?pole plug-in terminal
Storey call button connection	2?pole plug-in terminal
Display	17.78 cm (7?)
Number of colours	16.7 million
Resolution	800 x 1280 px, 216 ppi
Ambient temperature	+5 °C to +40 °C
Protection rating	IP3XD

Product properties

Connection technology	LAN

Dimensions

Width in mm	181
Height in mm	114
Total width in mm	181
Depth in mm	15 (assembly height)
Weight in kg	1

More images

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618