Designer surface-mounted mailbox GOETHE AP with newspaper compartment - RAL colour of your choice - GIRA System 106 Keyless In - VIDEO complete set | with newspaper compartment | 100mm depth | Gira System 106 Complete Video Set 2DB Fingerprint



Product number 215-AP-1-SP-ZF-KSGI106FP

Product description

Design surface-mounted mailbox GOETHE® AP with newspaper compartment - RAL colour of your choice - GIRA System 106 Keyless In - VIDEO complete set

High-quality surface-mounted mailbox with newspaper compartment and seamlessly integrated Gira System 106 in a flush-front design. The modern GOETHE® mailbox is ideal for discerning entrance areas. The straight-lined design without a visible lock gives this mailbox a particularly elegant appearance. Three GIRA System modules are included, so the mailbox can be used immediately. The matching GIRA indoor station and the control unit to complete this mailbox are included. The modules can be replaced later at any time via the simple retention system.

The dimensions of the single box provide a capacity of approx. 16 litres; the large aperture ensures that even DIN-C4 envelopes and magazines, or post accumulated during an extended absence, do not arrive creased. The innovative push-key lock is hidden invisibly inside the mailbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the lock positioned as it is, the mailbox is designed so that the collection door prevents your post from falling out towards you. Thanks to the water drainage edge, the internal post is optimally protected from the elements. The flap is equipped with high-quality hinge dampers for a very quiet closing and prevents annoying rattling due to weather influences.

The surface-mounted mailbox systems of the GOETHE® collection are characterised by the consistent use of stainless steel and aluminium. The result is very high durability and sustainability. The construction has been developed by our own engineers with a view to high flexibility and modularity, simple spare-part replacement and straightforward self-installation. Spare parts for all GOETHE® systems are available directly in our shop.

Thanks to the design, self-installation is uncomplicated.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- High-quality surface-mounted mailbox made of stainless steel and aluminium.
- Quality manufacturing - Made in Germany by Briefkasten Manufaktur Lippe.
- Mailbox (BH 400x400mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Innovative push-key lock with 2 keys.
- Letters are inserted and removed from the front. Insertion flap with high-quality hinge dampers for very quiet insertion of post.
- The mailbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 landscape; large letters fit in without bending.
- The collection door opens from top to bottom. This prevents your post from falling out towards you.
- Newspaper compartment (BH 400x200mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice with stainless steel laser inscription "ZEITUNG" (font ARIAL; if name/house number is chosen, it will match your selected font).
- Newspaper compartment opens from bottom to top.
- Function box (BH 400x200mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Optional name inscription approx. 15–20 mm high.
- Optional house number inscription approx. 70–80 mm high.
- Optimal protection from rain thanks to water drainage edges and a rain canopy made of 3 mm aluminium AlMg3 W19, powder-coated in RAL colour of your choice.
- Side cladding made of 3 mm aluminium AlMg3 W19, powder-coated in RAL colour of your choice.
- Includes mounting rail for wall installation.
- Includes GIRA indoor station, power supply & control unit enclosed; System 106 door station module, Keyless In fingerprint module & camera module installed.

GIRA

Camera module Gira System 106 - 5561 000, installed without wiring

- Behind the interchangeable black glass pane is a high-quality camera with high light sensitivity. With a detection angle of 100° the user is always informed about what is happening at their front door.

Keyless In fingerprint module Gira System 106 - 5551 920, installed

The GIRA fingerprint module is a professional biometric access control system based on the next-generation area-scan technology. Commissioning and user management are performed via the Gira Keyless In app.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Can be used as a stand-alone device with Gira TKS switching actuators or in combination with the Gira door communication system as a door-call system for buildings with multiple residential units.
- Scans the deepest layer of skin using high-frequency technology. High recognition rate and resistance to tampering.
- Evaluation of the unique characteristic features of the living human finger.
- Up to 99 fingers can be managed by the fingerprint reading unit.
- Reliable recognition of fingers that have been slightly injured during activities such as gardening (only the outer skin layer has been damaged).
- Data protection through encryption procedures.
- Fast response time from placing the finger to release: up to 30 stored fingers approx. 1 s, up to 99 stored fingers approx. 3 s.
- Night design of the fingerprint area for orientation using white LED illumination.
- 360° finger placement possible.
- 3-colour LED status indicator for visual signalling during programming and operation.
- Master PIN number on the enclosed sealed security card if the administrator finger is no longer available. The device can be reset to factory settings with the enclosed security card.
- Acknowledgement buzzer for acoustic signalling for users or the installer.
- Acoustic warning tone in the event of unauthorised removal of the fingerprint unit for sabotage detection. Tamper circuit with switching actuator in the door communication system.
- Inputs and outputs: connector strip for the connection cable to the Gira door communication system.

Door station module Gira System 106 - 5565 920, installed without wiring

- Compact voice module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good intelligibility.
- Power supply via 2-wire bus. Additional connection for central locking (e.g. required from the 3rd camera module onwards).
- All other System 106 modules (except the voice module) are powered via the door station module.

GIRA Video AP 7 apartment station 1209xx, enclosed

- Video indoor station with a 17.78 cm (7") TFT colour display and comfortable hands-free function for surface mounting or wall mounting with a flush-mounted device box or hollow-wall box. With the optional stand (see Accessories) also suitable for placement on furniture. A 32 GB SD memory card is included for internal image storage. Full-surface glass front with touch functionality and tactile feedback.

Control unit Video REG Gira 1288 00, enclosed

- Control unit for supplying the audio and video components of the Gira door communication bus.
- Supplies the polarity-protected and short-circuit-proof 2-wire bus when using video components such as colour camera and TFT colour display.
- Up to 2 door stations with colour camera and 28 apartment stations with TFT colour display can be supplied via the control unit Video.
- In total, up to 15 colour cameras can be controlled by the control unit Video (5 door stations Video and 10 TKS camera gateways), of which two door stations with colour camera can be powered by the control unit Video. The additional colour cameras must each be operated with their own power supply for door communication.
- Self-resetting electronic short-circuit and overload detection for the operating voltages and the bus connection.
- Buttons for system and door-opener programming.
- LED status indicators for operation, overload, system programming and door-opener programming.
- AC 12 V output for powering a commercially available door opener.
- Relay output for switching a door opener with its own power supply.
- Door opener switching time continuously adjustable from 1 to 10 s.

Power supply DC 24 V 300 mA Gira 1296 00, enclosed

- DC 24 V power supply for door communication components.
- Supplies the Keyless In module.

Important information

Camera or intercom preparation

The intercom systems must be connected by a qualified electrician. For planning, installation and commissioning, please contact the electrician you trust.

Water protection

To achieve optimal water protection for your post, the mailbox or mailbox system should, where possible, be located under a canopy.

Mail is only protected from water if it is placed completely inside the box and the insertion flap is closed. Post that is not fully inserted allows moisture and dirt to enter the mailbox. This system is protected against water ingress in accordance with DIN EN 13724. Water ingress is not a basis for a complaint.

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Newspaper compartment, Camera, Intercom, Fingerprint
Functional box prepared for manufacturer	GIRA
Material	Aluminium AlMg3 W19, Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Surface-mounted

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions


Height of single box in mm	BK 400.0 | ZF 200.0
Width of single box in mm	400.0
Capacity in litres	BK 16.0 | ZF 8.0
Height of letterbox slot in mm	35.0
Width of letter slot in mm	360.0
Height of letterbox in mm	800.0
Width of letterbox system in mm	400.0
Total width in mm	408.0
Depth in mm	100.0 + 25.0 rain canopy
Weight in kg	24
Delivery condition	Delivered assembled.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimension drawing

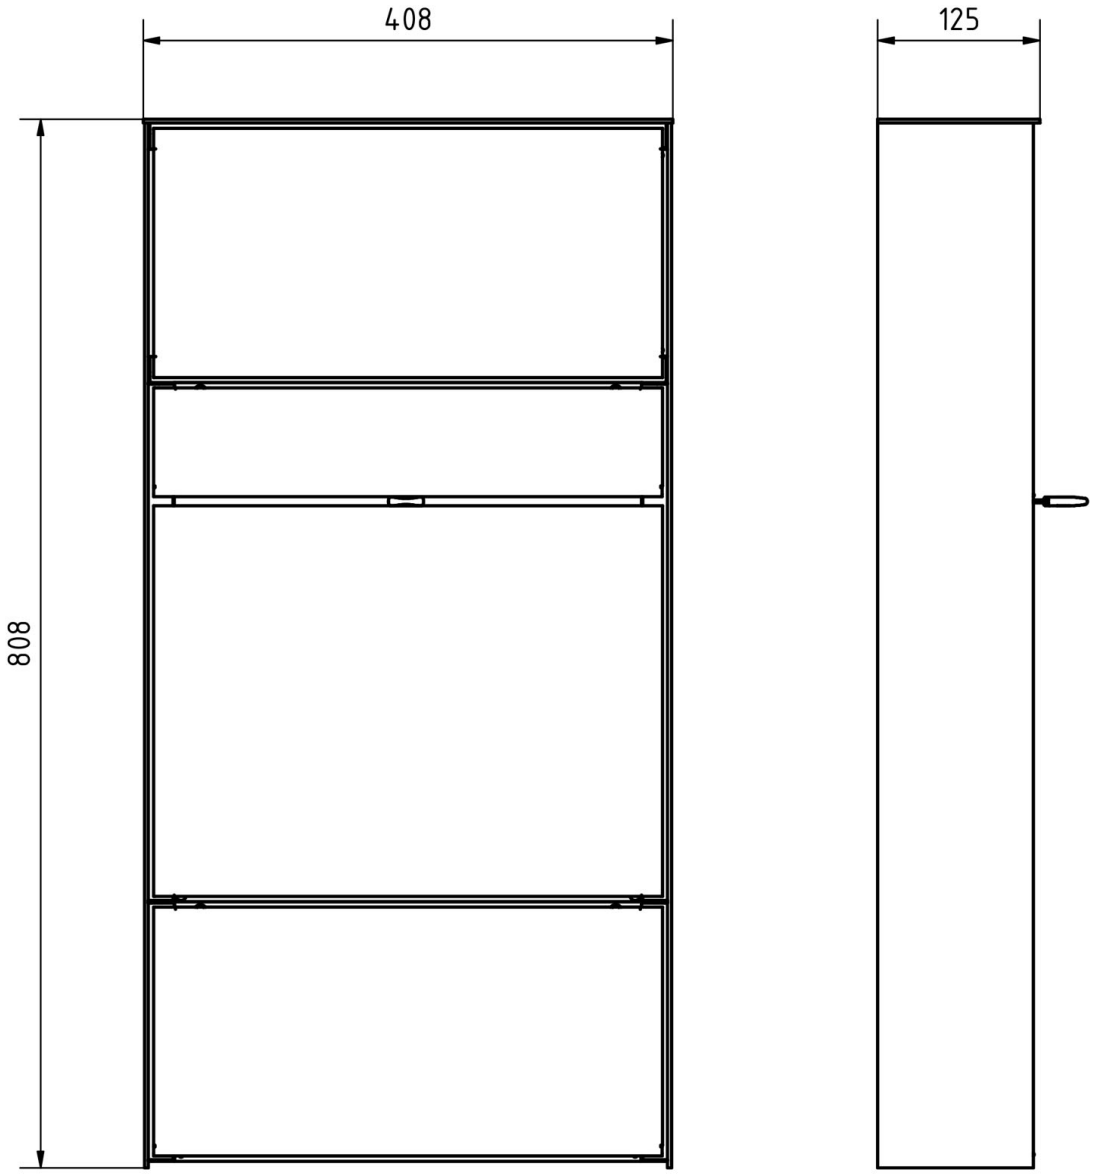

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110


Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images





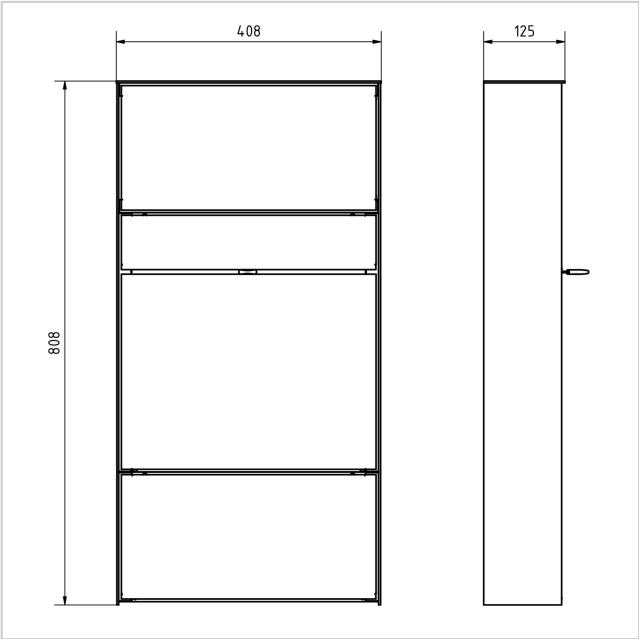

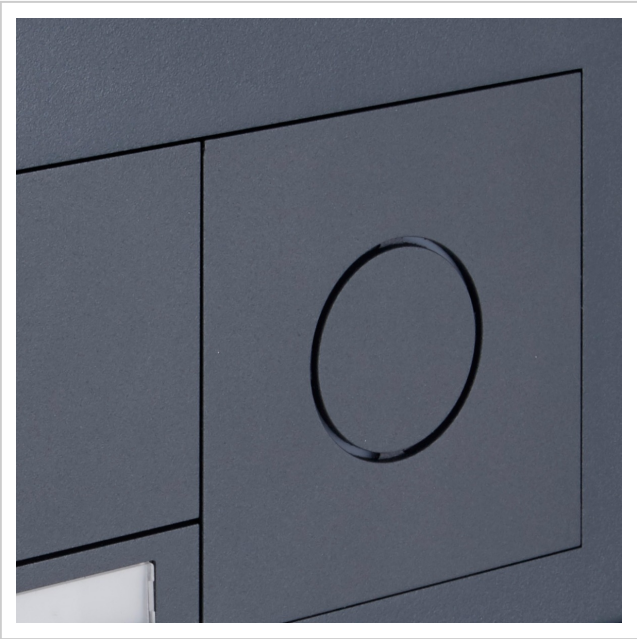


Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618



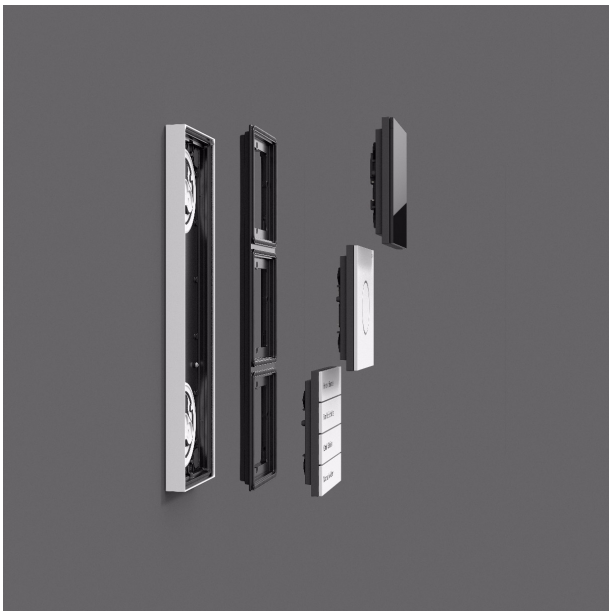





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618







Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618