4-compartment stainless steel surface-mounted mailbox Design BASIC Plus 382XA AP with doorbell box - stainless steel V2A | 150mm depth | with 4 mailboxes (2x2) | Centre | Stainless steel, brushed



Product number 382XA-VA-4-SP-150-M

Product description

4-unit stainless steel surface-mounted mailbox Design BASIC Plus 382XA AP with bell box - stainless steel V2A

High-quality surface-mounted mailbox for 4 occupants made in Germany by Briefkasten Manufaktur. The mailbox is made entirely of stainless steel V2A, brushed. The very high-quality workmanship and the well-thought-out concept make this mailbox one of our top sellers. A rain drainage edge for optimal water protection, a continuous rubber lip for quiet insertion, the robust interchangeable nameplate, a practical mail retention bar and the highly robust lock characterise this surface-mounted mailbox.

The mailbox systems of the BASIC Plus collection are characterised by the consistent use of stainless steel V2A. The result is very high durability and sustainability. The construction has been developed by our own engineers with a focus on high flexibility and modularity, simple spare-part installation and straightforward self-installation. Spare parts for all BASIC Plus systems are readily available.

Thanks to the design, self-installation is straightforward. The mailbox system is prepared for uncomplicated complete installation; there is no need for complex wall-mounting of individual boxes. 4-unit surface-mounted mailbox made of weather-resistant stainless steel V2A 1.4301, 240-grit brushed finish.

Advantages at a glance

Stainless steel side cladding with rain canopy

The side cladding and rain canopy are made of stainless steel V2A 1.4301, 240-grit brushed finish and complement the system as an integrated weather protection solution.

Generous letter slot

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

The slot measures 35 × 325 mm and is designed for DIN C4 landscape. The mailbox design complies with DIN EN 13724.

Quiet insertion and convenient retrieval

The integrated flap damping with rubber seal reduces impact noise during insertion. The mail retention bar holds items back during retrieval.

Integrated bell and intercom area

Bell box made of stainless steel V2A 1.4301, 240-grit brushed finish. The stainless steel doorbell button Type 4 is used. Optionally prepared with a speaking grille for the installation of standard intercom systems or flush-mounted speakers. (Intercom system/flush-mounted speaker not included). A version with the Comelit Ultra video complete set is also available as an option.

Quality manufacturing and well-thought-out construction

The system is manufactured by Briefkasten Manufaktur in Germany. The design is intended for straightforward self-installation.

Equipment and product details

Mailbox system

Number of mailboxes 4 individually usable mail compartments
Arrangement 2 × 2
Depth 150 mm
Mailbox material Stainless steel V2A 1.4301
Mailbox surface 240-grit brushed finish
Bell/intercom section Bell box made of stainless steel V2A 1.4301, 240-grit brushed finish

Mail and operation

Slot 35 × 325 mm, suitable for DIN C4 landscape
Standard DIN EN 13724
Insertion flap Sound-dampened with rubber seal
Keys 2 keys with key number per mailbox
Nameplate Interchangeable nameplate below the insertion flap
Mail retention bar Integrated per mailbox

Mounting and equipment

Mounting type Surface-mounted
Rain drainage edge Integrated into the construction
Rain canopy Made of stainless steel V2A 1.4301, 240-grit brushed finish
Side cladding Made of stainless steel V2A 1.4301, 240-grit brushed finish
Mounting hardware For wall mounting including mounting rail and fixings (screws + wall plugs)
Manufacture Made in Germany by Briefkasten Manufaktur Lippe

Note on weather protection

Mail items are best protected from moisture and dirt when fully inserted and with the insertion flap closed. Oversized items may prevent the flap from closing completely.

Note on wall mounting

Before installation, the load-bearing capacity and condition of the wall must be checked. The fastening must be matched to the weight of the system and the existing wall construction.

Product properties

Series	BASIC
Number of bell push buttons	4 buttons
Functions	Light button, Intercom
Functional box prepared for manufacturer	GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, Comelit
Number of boxes	with 4 letterboxes
Name labelling	Nameplate
Material	Stainless steel V2A 1.4301
Removal of mail	On the front
Surface/colour	Brushed
Boxes by volume	Large > 16 litres
Mounting type	Surface-mounted

Dimensions

Height of single box in mm	330.0
Width of single box in mm	355.0
Capacity in litres	12.0 | 17.0
Height of letterbox slot in mm	35.0
Width of letter slot in mm	325.0
Height of letterbox in mm	760.0
Width of letterbox system in mm	710.0
Total width in mm	710.0
Depth in mm	100.0 | 150.0
Weight in kg	32

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images










Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

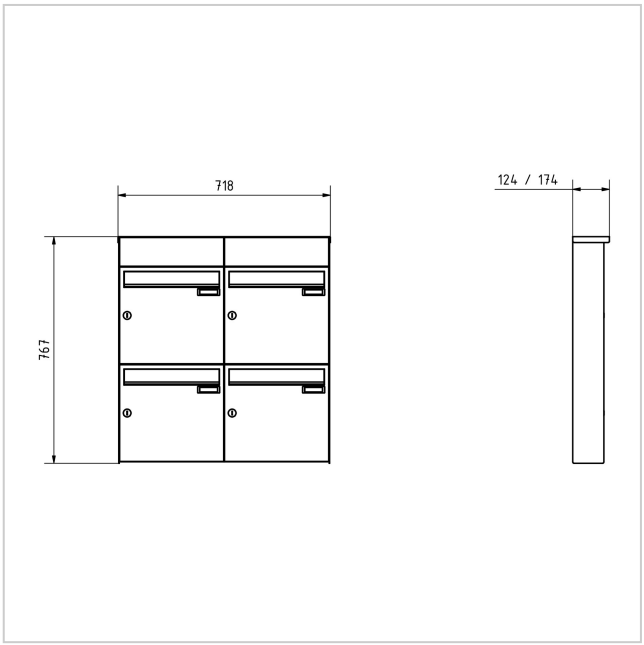







Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618



Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618