Single freestanding letterbox Design BASIC 385P ST-T with doorbell box - stainless steel, RAL 7016 anthracite | BI-Color brushed stainless steel | RAL 7016 anthracite grey | Top | with 1 mailbox



Product number 385P-7016VA-1-SP

Product description

Freestanding mailbox BASIC 385P with bell/intercom module for 1 party – BI-Color stainless steel / RAL 7016

The freestanding BASIC 385P mailbox for 1 party combines a separately usable mailbox with an integrated bell function box. This brings together mail reception, a doorbell push button and the provision for a compatible door intercom system in a robust, visually cohesive entrance solution for single-family homes, offices and high-quality individual properties. The bell function box is directly integrated into the overall unit.

The mailbox body is made of galvanised steel and is matt powder-coated in RAL 7016 Anthracite grey with a fine texture. Brushed stainless steel insertion flaps provide a high-quality BI-Color accent. The side cladding and rain hood are made of stainless steel V2A and are powder-coated to match in RAL 7016. Particularly distinctive are the solidly manufactured stand posts made from anodised aluminium profile, which are also coated in anthracite grey and give the unit a secure, very robust base.

The mailbox has an approximate volume of 12 litres. The 35 × 265 mm insertion slot is designed for DIN C4 items in portrait orientation. A noise-damping rubber lip reduces the impact noise of the insertion flap. Mail is retrieved from the front; the access doors open from left to right. Each mailbox is supplied with two keys with key number and an interchangeable nameplate located below the insertion flap.

The advantages of the BASIC 385P mailbox unit at a glance

Integrated bell function box

The unit combines a mailbox with a stainless steel doorbell push button and a speaker aperture with a universal adapter. This creates a central, tidy solution for mail and visitor communication.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Solid aluminium stand posts

Solidly manufactured, anodised aluminium profiles form the stable base of the freestanding unit. The powder-coated construction combines high load-bearing capacity with a durable finish suitable for outdoor use.

DIN C4 insertion with 12-litre volume

The mailboxes each offer approximately 12 litres of mail volume. The 35 × 265 mm insertion slot accepts DIN C4 items in portrait orientation without the need to bend larger envelopes unnecessarily.

Prepared for door communication

The speaker aperture with universal adapter is prepared for a wide range of commercially available flush-mounted speakers.

BI-Color stainless steel / RAL 7016

Brushed stainless steel insertion flaps provide a high-quality contrast to the anthracite grey mailbox bodies. The robust combination of materials links modern aesthetics with long-lasting everyday suitability.

Equipment of the BASIC 385P mailbox unit

Mailbox unit

Number of mailboxes 1 individually accessible mailbox
Mailbox dimensions 300 × 110 × 385 mm (W × H × D) per mailbox
Mail volume Approx. 12 litres per mailbox
Material Galvanised steel; side cladding and rain hood made of stainless steel V2A
Finish BI-Color: RAL 7016 Anthracite grey with brushed stainless steel insertion flaps
Insertion slot 35 × 265 mm, suitable for DIN C4 portrait
Standard Mailboxes in accordance with DIN EN 13724

Bell and intercom module

Bell function box Galvanised steel, suitably powder-coated
Position Integrated into the unit
Doorbell push button 1 round stainless steel doorbell push button Type 4
Speaker aperture With universal adapter for commercially available flush-mounted speakers
Nameplate Indentation-proof and impact-resistant

Solid aluminium stand posts

Stand posts Solidly manufactured, anodised aluminium profile
Coating Powder-coated in RAL 7016 Anthracite grey
Mounting options Either screw fixing or concreting-in
Screw fixing Stand posts selectable in 1200 mm or 1600 mm
Concreting-in Stand posts selectable in 1600 mm or 2000 mm
Condition on delivery Stand posts and mailbox unit supplied in sections for installation
Manufacture Made in Germany by Briefkasten Manufaktur Lippe

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Note on the bell/intercom module

The universal adapter is suitable for a wide range of commercially available flush-mounted speakers. Intercom systems or flush-mounted speakers, power supply and cabling are not part of the described basic equipment and must be provided to suit the planned system.

Mounting on a foundation

For screw fixing, a level and sufficiently load-bearing foundation is required. Fixings should be chosen to suit the foundation, the weight of the unit and local site conditions.

Installation by concreting-in

For the concreting-in version, the extended aluminium stand posts are anchored plumb into a suitably dimensioned concrete foundation. Foundation size and embedment depth must be matched to ground conditions, unit dimensions and local loads.

Note on weather protection

The rain hood, close-fitting side cladding and rain drainage channels support weather protection. Postal items must be fully inserted so that the insertion flaps can close completely. Under extreme weather conditions, slight moisture ingress may occur despite norm-compliant construction.

Product properties

Material	Steel, galvanised, Aluminium AlMg3 W19, Stainless steel V2A 1.4301
Series	BASIC
Number of bell push buttons	1 button
Functions	Light button, Intercom
Functional box prepared for manufacturer	GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, Comelit
Boxes by volume	Normal > 10 litres
Name labelling	Nameplate
Mounting type	Free-standing
Surface/colour	RAL 7016 anthracite grey, Brushed
Removal of mail	On the front
Number of boxes	with 1 letterbox

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions

Height of single box in mm	110.0
Width of single box in mm	300.0
Capacity in litres	12
Height of letterbox slot in mm	35.0
Width of letter slot in mm	265.0
Overall height in mm	1200.0 | 1600.0
Total width in mm	400.0
Depth in mm	435.0
Weight in kg	21
Delivery condition	Delivery is made in blocks; stand elements / mailbox delivered in separate parts


Dimension drawing


Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Montagebohrungen

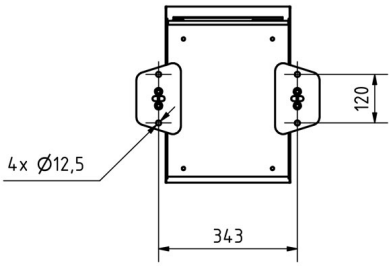

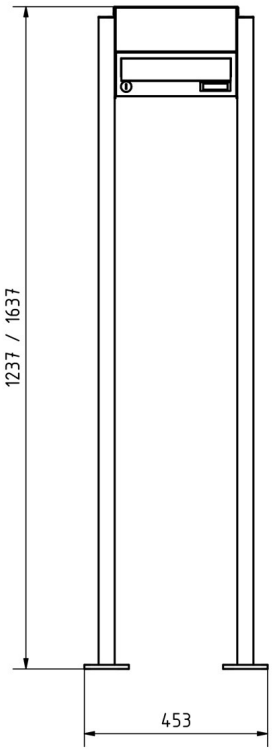

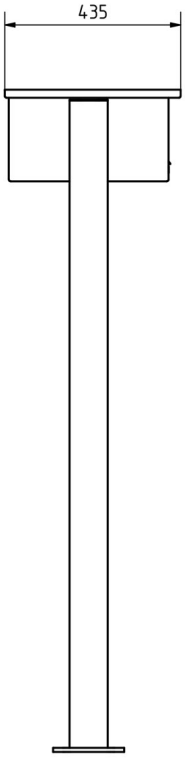


Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images

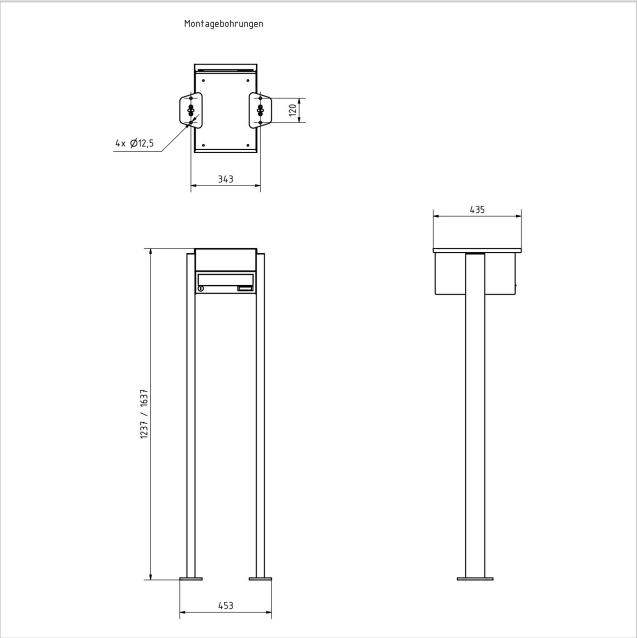







Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618









Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618