DoorBird IP VIDEO Apartment Station A1103 | White

Product number 1298-A1103-W



Product description

DoorBird IP Video Indoor Station A1103 White Edition with black display frame

The DoorBird IP Video Indoor Station A1103 White Edition is a modern indoor station for IP-based door communication in residential, commercial and public buildings. In conjunction with a DoorBird IP Video door station it enables live video, two-way audio and the control of doors, gates, lifts and other connected functions.

The 7-inch True IPS touch display offers a clear presentation and an intuitive user interface. The white finish with black display frame blends discreetly into modern interiors while providing a clear visual accent. In addition to touch operation, the indoor station features a touch bar with main functions and a configurable RGB LED status bar for visitor and event signals.

Flexible IP door communication for modern buildings

The DoorBird A1103 supports network connection via LAN, Wi-Fi and PoE. With multiple indoor stations, room-to-room communication can be used. Additional features include SIP support, visitor history with free cloud recording, weather forecast and functions for home and building automation control via IP, TCP, HTTPS and relays.

Integrated relays and digital inputs

Two freely configurable bi-stable latching relays can be used to control, for example, electric door openers, gates or lifts. Two digital inputs allow the integration of floor call buttons or other volt-free contacts. Configuration is performed via the DoorBird App or the web-based dashboard.

Technical data

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Produkt	DoorBird IP Video Indoor Station A1103 White Edition
Ausführung	White with black display frame
Material	Polycarbonate, glass
Montageart	Surface-mounted installation Table stand available separately
Stromversorgung	15 - 48 V DC, min. 15 W, or Power over Ethernet, PoE 802.3af Mode-A
Leistungsaufnahme	Max. 10 W
Betriebsbedingungen	0 °C to +55 °C Relative humidity 0 % to 85 %, non-condensing
Anschlüsse	RJ45 for LAN/PoE Digital input #1, 0 V, 0 A (NO), e.g. for floor call button Digital input #2, 0 V, 0 A (NO), e.g. for second floor call button Bi-stable latching relay #1, max. 24 V DC / AC, 1 A Bi-stable latching relay #2, max. 24 V DC / AC, 1 A 15 - 48 V DC input (+, -), max. 15 W
Schaltrelais	2 x freely configurable bi-stable latching relays, e.g. for electric door openers, gates or lifts
Digitale Eingänge	2 x volt-free digital inputs, e.g. for floor call buttons
Display	7-inch true colour LCD
Touchscreen	Yes, capacitive
Auflösung	1024 x 600 pixels
IPS	Yes
Glas	Scratch-resistant toughened glass
Audio	Speaker and microphone Echo and noise suppression, AEC and ANR Two-way audio
Lautstärke	HD audio, up to 102 dB
Klingeltöne	Over 50 ringtones
Bedienung	Touch display Touch bar with main functions Configurable tile view Configurable RGB LED status bar
Ethernet	10/100 Base-T, PoE-capable
WLAN	Wi?Fi 802.11 b/g/n, 2.4 GHz
Funkmodule	Wi?Fi 802.11 b/g/n, 2.4 GHz
IP-Funktionen	Door opening and lift control Visitor history with free cloud recording Room-to-room communication with multiple indoor stations SIP support, e.g. for concierge or caretaker calls Weather forecast Home and building automation control via IP, TCP, HTTPS and relays Compatible with smart locks and DoorBird IP Video Mini Dome camera Configuration via DoorBird App and web-based dashboard
Systemanforderungen	Mobile device with up-to-date iOS or Android High-speed fixed-line broadband connection via DSL, cable or fibre No SOCKS or proxy server Ethernet network with DHCP

Unterstützte Türstationen	Any DoorBird IP Video door station
Zulassungen	CE RED, IEC/EN 62368, FCC, IC, Reach 250, RoHS 2.0, California 65, WEEE
Gewicht	510 g
EAN	4251489614004
Hersteller-Artikelnummer	429614004
Lieferumfang	1 x IP Video indoor station 1 x mounting bracket 1 x mains adapter 100 - 240 V AC to 15 V DC with up to 4 country adapters 1 x quick start guide with Digital Passport 1 x installation manual 1 x small parts


Notes

- The DoorBird IP Video Indoor Station A1103 White Edition is intended for indoor use.
- Connection can be made via LAN, Wi-Fi or PoE.
- The table stand is available as an optional accessory and is not included in the delivery.
- With multiple indoor stations, room-to-room communication can be used.
- Installation must be carried out by a qualified electrician.

Dimensions

Width in mm	185.0
Height in mm	146.0
Total width in mm	185.0
Depth in mm	26.04
Weight in kg	0,4

More images

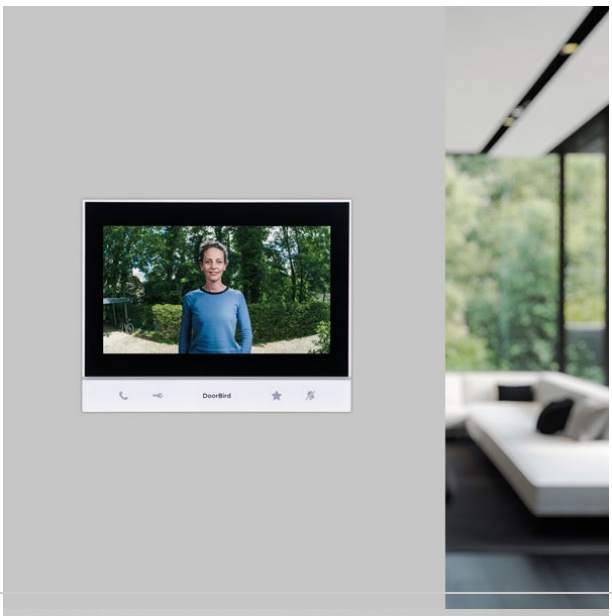





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618