Designer recessed mailbox GOETHE UP with side newspaper compartment - RAL colour of your choice - GIRA System 106 Keyless In - VIDEO complete set | Left | with newspaper compartment | Gira System 106 Complete Video Set 2DB Fingerprint



Product number 215-UP-1-SPSZF-KGI106F-L

Product description

Design recessed mailbox GOETHE UP with side newspaper compartment - RAL colour of choice - GIRA System 106 Keyless In - VIDEO complete set

High-quality recessed mailbox manufactured with newspaper compartment and seamlessly integrated Gira System 106 in a flush-mounted design. The modern GOETHE mailbox is ideal for demanding entrance areas. The clean-lined form without a visible lock gives this mailbox a particularly elegant appearance. Four Gira System modules are included, so the mailbox can be put into service immediately. The matching Gira apartment station and the control unit to complete this mailbox are included. The modules can be exchanged afterwards at will thanks to the simple retention system.

The dimensions of the single box allow a capacity of approx. 16 litres; the large entry ensures that C4 envelopes and magazines — and post received after several days away — do not arrive creased. The innovative Push-Key lock is hidden invisibly inside the mailbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the arrangement of the lock, this mailbox is designed so that the retrieval door prevents your post from falling out towards you. Thanks to the water drainage edge, the internal post is optimally protected from the weather. The entry flap is fitted with high-quality axis dampers, ensuring a quiet close and preventing rattling due to weather influences.

The mailbox systems of the GOETHE collection are characterised by the consistent use of stainless steel. The result is very high durability and sustainability. The construction has been developed by our own engineers with a focus on high flexibility and modularity, easy spare-part assembly and uncomplicated self-installation. Spare parts for all GOETHE systems are available directly in our shop.

Thanks to the construction method, self-installation is straightforward.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Recessed mailbox completely made of stainless steel.
- Quality manufacture - Made in Germany by Briefkasten Manufaktur Lippe.
- Mailbox (W x H 400 x 400 mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Innovative Push-Key lock with 2 keys.
- Letter entry and retrieval are from the front. Entry flap with high-quality axis dampers for a very quiet post drop-in.
- The mailbox conforms to DIN/EN 13724. Entry size (3.5 cm x 36.0 cm) for C4 landscape — large letters also fit in without folding.
- The retrieval door opens from top to bottom. This prevents your post from falling out towards you.
- Newspaper compartment (W x H 400 x 200 mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice with stainless-steel laser inscription "ZEITUNG" (font ARIAL; if name/house number is chosen, it will use your selected font).
- Newspaper compartment opens from bottom to top.
- Function box (W x H 200 x 600 mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Optionally with name engraving 15–40 mm on the info module, laser-engraved.
- Optionally with house number 60–80 mm, laser-engraved.
- Nameplate in stainless steel, powder-coated in RAL colour. A bell is laser-engraved.
- Plaster cover frame made of 2 mm stainless-steel angle profile 25 x 58 mm, powder-coated in RAL colour.
- Incl. GIRA apartment station, power supply & control unit included, System 106 info module, System 106 door station module, Keyless In fingerprint module & camera module installed.

GIRA

Camera module Gira System 106 - 5561 000, installed without cabling

- Behind the interchangeable black glass panel is a high-quality camera with high light sensitivity. Thanks to a detection angle of 100°, the user always has an overview of what is happening at their front door.

Info module Gira System 106 - 5560 920, installed

- For house numbers/labels that should be prominently displayed.

Keyless In fingerprint module Gira System 106 - 5551 920, installed

The GIRA fingerprint module as a professional biometric access control system based on next-generation area-scan technology. Commissioning and user management are carried out via the Gira Keyless In App.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Can be used as a stand-alone device with Gira TKS switching actuators or in combination with the Gira door communication system as a door call system for buildings with multiple residential units.
- Scans the lowest layer of skin using high frequency. High detection rate and tamper resistance.
- Evaluation of the unique characteristic features of the living human finger.
- Up to 99 fingerprints can be managed by the fingerprint reading unit.
- Reliable recognition of fingers that have been slightly injured, e.g. during gardening (only the top skin layer has been damaged).
- Data protection through encryption methods.
- Fast response time from placing the finger to release: approx. 1 s for up to 30 stored fingers, approx. 3 s for up to 99 stored fingers.
- Night-time design of the fingerprint area for orientation using white LED illumination.
- 360° finger placement possible.
- 3-colour LED status indicator for visual signalling during programming and operation.
- Master PIN number on the enclosed sealed security card, should the administrator finger no longer be available. The device can be factory-reset with the enclosed security card.
- Acknowledgement buzzer for acoustic signalling for the user or installer.
- Acoustic warning tone in the event of unauthorised removal of the fingerprint attachment for sabotage detection. Sabotage switching with switching actuator in the door communication system.
- Inputs and outputs: connector strip for connection cable to the Gira door communication system.

Door station module Gira System 106 - 5565 920, installed without cabling

- Compact audio module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good intelligibility.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. required from the 3rd camera module).
- All other System 106 modules (except the audio module) are supplied with power via the door station module.

Apartment station Gira Video AP 7 1209xx, included

- Video apartment station with a 17.78 cm (7") TFT colour display and convenient hands-free function for surface-mounted installation or wall mounting with a flush-mounted device box or hollow-wall box. With the optional stand (see Accessories) also suitable for placement on furniture. A 32 GB SD memory card is included for internal image storage. Full-surface glass front with touch functionality and tactile feedback.

Control unit Video REG Gira 1288 00, included

- Control unit for supplying the audio and video components of the Gira door communication bus.
- Supply of the polarity-proof and short-circuit-proof 2-wire bus when using video components such as colour camera and TFT colour display.
- Up to 2 door stations with colour camera and 28 apartment stations with TFT colour display can be supplied via the video control unit.
- A total of up to 15 colour cameras can be controlled by the video control unit (5 video door stations and 10 TKS camera gateways), of which two door stations with colour cameras can be supplied with power by the video control unit. The additional colour cameras must each be operated with their own power supply for door communication.
- Self-resetting electronic short-circuit and overload detection of the supply voltages and the bus connection.
- Buttons for system and door-opener programming.
- LED status indicators for operation, overload, system programming and door-opener programming.
- AC 12 V output for powering a conventional door opener.
- Relay output for switching a door opener with its own power supply.
- Door opener switching time continuously adjustable from 1 to 10 s.

Power supply DC 24 V 300 mA Gira 1296 00, included

- DC 24 V power supply for supplying door communication components.
- Supply for the Keyless In module.

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. For planning, installation and commissioning, please contact the electrician of your choice.

Water protection

To achieve optimal water protection for your post, the mailbox or mailbox system should, if possible, be located under a canopy.

Items of post are only protected from water if they are placed completely inside the box and the entry flap is closed. Post that is not fully inserted allows moisture and dirt to enter the mailbox. This system is protected against water ingress according to DIN EN 13724. Water ingress is not a basis for a complaint.

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Newspaper compartment, Camera, Intercom, Fingerprint
Functional box prepared for manufacturer	GIRA
Material	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Flush-mounted

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions


Height of single box in mm	BK 400.0 | ZF 200.0
Width of single box in mm	400,0
Capacity in litres	BK 16.0 | ZF 8.0
Height of letterbox slot in mm	35,0
Width of letter slot in mm	360,0
Height of letterbox in mm	External dimension 652.0 | installation dimension 605.0
Width of letterbox system in mm	External dimension 652.0 | installation dimension 605.0
Total width in mm	650,0
Depth in mm	100.0 | installation dimension 103.5
Weight in kg	21
Delivery condition	Delivery is assembled

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimension drawing

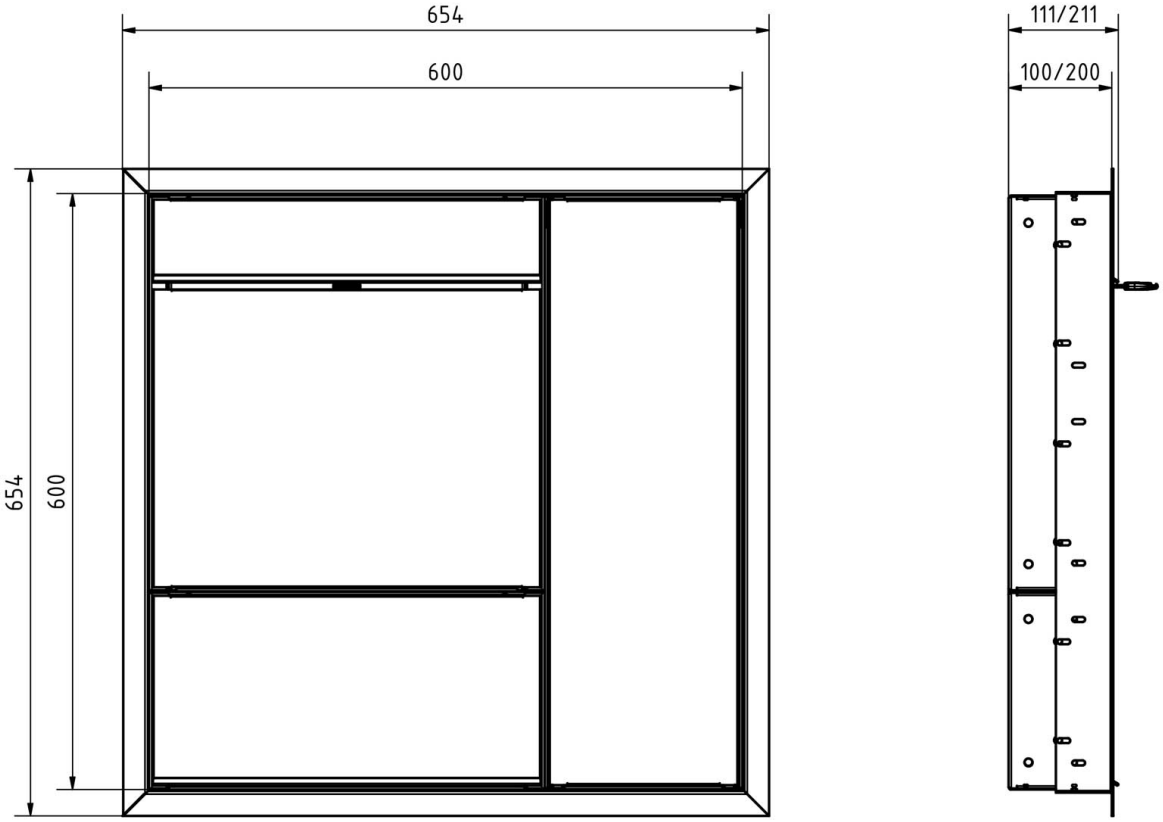


Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110


Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images



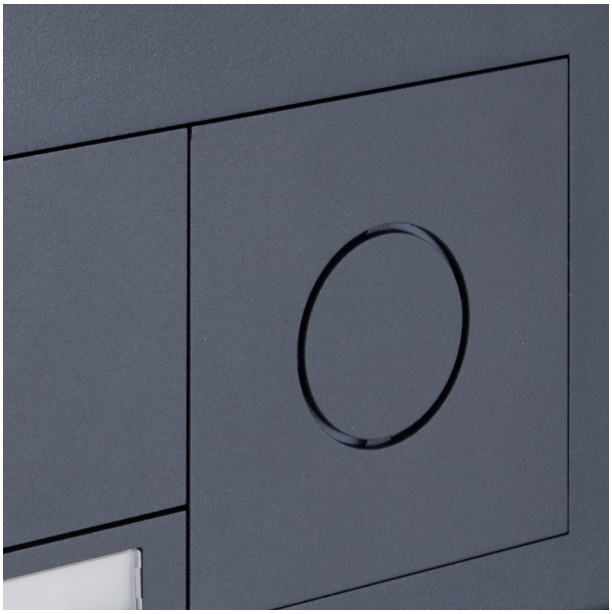



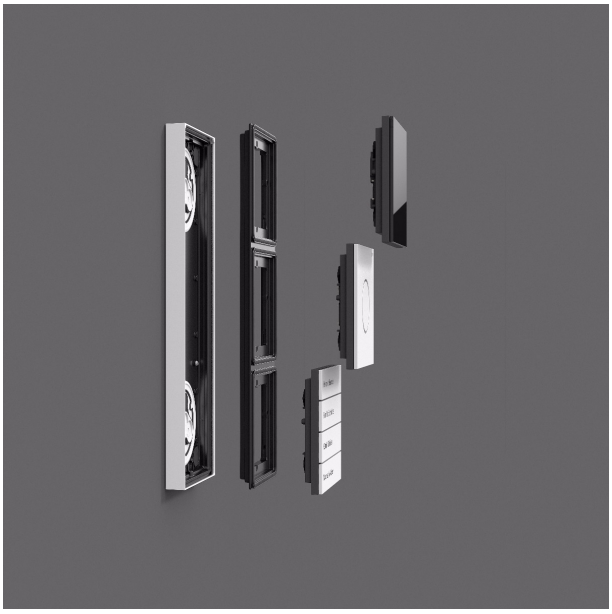

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618







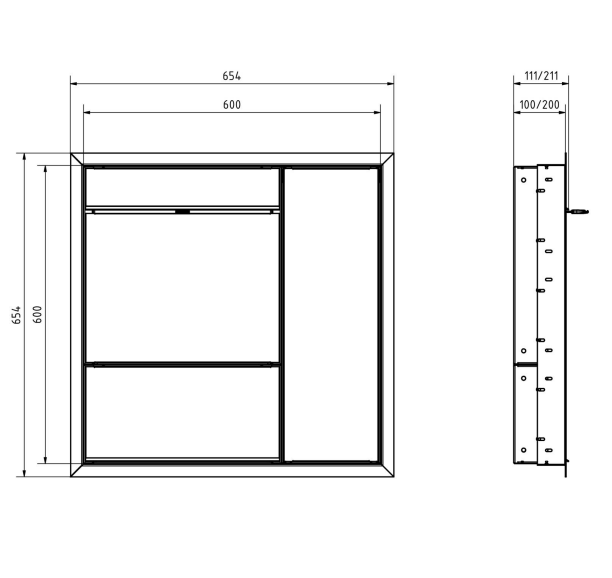

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618