Stainless steel surface-mounted mailbox system Design BASIC Plus 385 XA 220 - RAL colour of your choice | ? Colour of your choice | 300x220x385 mm (WxHxD) - ???? Large 25 litres | with 1 mailbox

Product number 385XA220-1



Product description

Surface-mounted mailbox BASIC Plus 385XA 220 for 1 household – 25 litres per compartment – RAL colour of your choice

The BASIC Plus 385XA surface-mounted mailbox unit for 1 household is a robust wall solution for single-family homes, offices, medical practices and individual commercial units. The compact single unit is suitable for a neat, space-saving installation directly on the façade.

The BASIC Plus mailbox unit is made consistently from stainless steel V2A and is powder-coated in the chosen RAL colour. The modular construction is designed for durability, simple installation and good spare-parts availability.

Each compartment measures 300 × 220 × 385 mm (W × H × D) and offers approx. 25 litres of volume. The 35 × 265 mm insertion opening is designed for DIN C4 items in portrait format. The doors open from left to right; each mailbox comes with two keys with key number and a changeable nameplate located beneath the insertion flap.

The advantages of the BASIC Plus 385XA 220 surface-mounted unit at a glance

Compact wall-mounted solution

The single mailbox is mounted directly on the façade and combines a large mail aperture with closed side cladding and a rain hood.

25 litres mail volume per compartment

The 300 × 220 × 385 mm (W × H × D) mail compartments each offer approx. 25 litres of volume. The 35 × 265 mm insertion opening also accepts larger DIN C4 items in portrait format.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Quiet insertion and secure allocation

The rubber lip cushions the insertion flap. Robust locks, two keys with key number and protected changeable nameplates ensure a clear assignment of the individual mailboxes.

Mounting rail for wall mounting

The surface-mounted unit is designed for direct façade installation. A mounting rail facilitates installation; fixing material with screws and wall plugs is included in the described configuration.

BASIC Plus in RAL colour of your choice

Stainless steel V2A forms the robust basis; the powder coating can be applied in the desired RAL colour to match the façade, front door and window profiles. BASIC Plus also stands for consistent use of V2A, modular construction and directly available spare parts.

Equipment of the BASIC Plus 385XA 220 mailbox unit

Mailbox unit

Number of mailboxes 1 separately lockable compartment
Single compartment 300 × 220 × 385 mm (W × H × D)
Volume Approx. 25 litres per mailbox
Material Stainless steel V2A, powder-coated in RAL colour of your choice
Surface Powder coating in RAL colour of your choice
Standard DIN EN 13724

Mail handling and operation

Insertion opening 35 × 265 mm, suitable for DIN C4 in portrait format
Insertion flaps With noise-damping rubber lip
Mail retrieval From the front
Door opening From left to right
Keys 2 keys with key number per mailbox
Nameplate Changeable nameplate beneath the insertion flap

Cladding and wall mounting

Side cladding Close-fitting design
Rain hood Robust, matching the unit
Type of installation Surface-mounted wall installation
Installation aid Mounting rail
BASIC Plus Modular construction with spare parts directly available
Fixing material Screws and wall plugs included; check suitability for the wall substrate on site
Manufacture Made in Germany by Briefkasten Manufaktur Lippe

Note on wall mounting

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

The wall must be even and sufficiently load-bearing. The supplied screws and wall plugs should only be used if they are suitable for the existing wall structure; for other substrates or thermal insulation composite systems, appropriate fixing solutions must be specified on site.

Note on weather protection

Mail is best protected from moisture and dirt only when items are fully inserted and the insertion flap is closed. Protruding letters or magazines can prevent the flap from closing completely.

BASIC Plus construction

The BASIC Plus series consistently relies on stainless steel V2A and a modular, installation-friendly construction. Spare parts are directly available for BASIC Plus units.

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	BASIC
Name labelling	Nameplate
Material	Stainless steel V2A 1.4301
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Surface-mounted

Dimensions

Height of single box in mm	220.0
Width of single box in mm	300.0
Capacity in litres	25
Height of letterbox slot in mm	35.0
Width of letter slot in mm	265.0
Height of letterbox in mm	220.0
Width of letterbox system in mm	300.0
Total width in mm	465.0
Depth in mm	435.0
Weight in kg	15
Delivery condition	Delivered fully assembled.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110


Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images








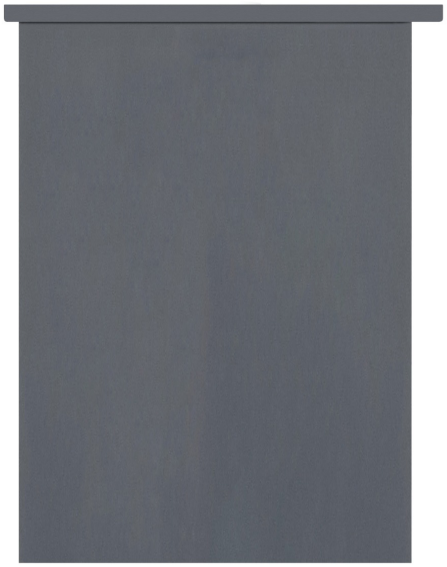

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

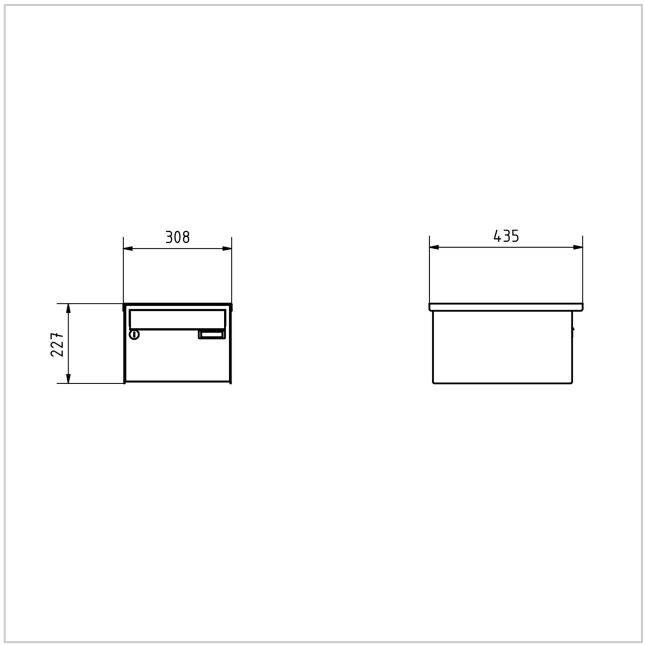



Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618