Designer drop-through letterbox GOETHE MDW - RAL colour of your choice - GIRA System 106 | 300-390mm depth | Gira System 106 Complete Video Set 2DB



Product number 215-MDW-1-SP-KSGI106-390

Product description

Design through-wall letterbox GOETHE MDW - RAL of your choice - GIRA System 106 - VIDEO complete set

The modern GOETHE through-wall letterbox with seamlessly integrated Gira System 106 in a flush-mounted design is ideal for a high-quality entrance area. The linear design gives this letterbox an especially elegant appearance. Thanks to the variable chute length between 300 mm to 390 mm or 390 mm to 560 mm, this letterbox can be used in almost all types of masonry. 3 GIRA system modules are included, so the letterbox can be used immediately. The matching GIRA apartment station and the control unit to complete this letterbox are included. The modules can be exchanged later at any time using the simple retention system.

The dimensions of the individual compartments provide a capacity of approx. 24–44 litres; the large insertion aperture guarantees that DIN C4 envelopes and magazines, or post after several days' absence, will not be creased. Thanks to the drip edge, the mail inside is optimally protected from the weather. The insertion flap is equipped with high-quality hinge dampers, ensuring quiet closing and preventing disturbing rattling caused by weather conditions.

The letterbox systems of the GOETHE collection are characterised by the consistent use of stainless steel. The result is very high durability and sustainability. The construction has been developed by our own engineers with a view to high flexibility and modularity, easy spare part assembly and uncomplicated self-installation. Spare parts for all GOETHE systems are available directly in our shop.

Thanks to the design, self-installation is straightforward.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- High-quality through-wall letterbox entirely made from stainless steel.
- Chute made from stainless steel 1.4016 (non-rusting magnetic stainless steel), bare finish.
- Body made from stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in a RAL colour of your choice.
- Quality manufacture - Made in Germany by Briefkasten Manufaktur Lippe.
- The letterbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 landscape, allowing large letters to be inserted without folding.
- Letter slot & retrieval door made from stainless steel V2A 1.4301, powder-coated in a RAL colour of your choice.
- Letters are inserted and retrieved from the front. Insertion flap with high-quality hinge dampers for very quiet insertion of post.
- Retrieval door opens from top to bottom. This prevents your post from falling out towards you.
- Function box (W x H 400 x 200 mm) made from stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in a RAL colour of your choice.
- Nameplate made from stainless steel, powder-coated in RAL colour. Your name and/or a bell will optionally be laser-engraved onto the nameplate.
- Optionally with house number, laser-engraved (a name inscription can also be applied here).
- Incl. GIRA apartment station & control unit supplied, System 106 door station module, info module & camera module installed.
- Plaster cover frame made from stainless steel angle profile 25 x 58 mm, powder-coated in RAL colour.
- Variable chute length 300–390 mm or 390–560 mm. External dimensions of letter chute W 380 mm x H 180 mm.
- External dimensions front W 450 mm x H 450 mm; rear W 450 mm x H 250 mm.

GIRA

Camera module Gira System 106 - 5561 000, installed without cabling

- Behind the interchangeable black glass pane is a high-quality camera with high light sensitivity. With a detection angle of 100° the user always has a good view of what is happening at their front door.

Info module Gira System 106 - 5560 920, installed

- For house numbers that should be prominently displayed.

Door station module Gira System 106 - 5565 920, installed without cabling

- Compact voice module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof speaker ensure clear communication.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. necessary from the 3rd camera module).
- All other System 106 modules (except the voice module) are powered via the door station module.

Apartment station Gira Video AP 7 1209xx, supplied

- Video apartment station with a 17.78 cm (7") TFT colour display and comfortable hands-free function for surface-mounted installation or wall mounting with flush-mounted device box or cavity wall box. With the optional stand (see Accessories) also suitable for placement on furniture. A 32 GB SD memory card is included for internal image storage. Full-surface glass front with touch functionality and tactile feedback.

Video control unit REG Gira 128800, supplied

- Control unit for powering the audio and video components of the Gira door communication bus.
- Supplies the polarity-protected and short-circuit-proof 2-wire bus when video components such as colour camera and TFT colour display are used.
- Up to 2 door stations with colour camera and 28 apartment stations with TFT colour display can be supplied via the video control unit.
- In total, up to 15 colour cameras can be controlled by the video control unit (5 video door stations and 10 TKS camera gateways), of which two door stations with colour camera can be powered by the video control unit. The remaining colour cameras must each be operated with their own power supply for door communication.
- Self-resetting electronic short-circuit and overload detection for the operating voltages and the bus connection.
- Buttons for system and door opener programming.
- LED status indicators for operation, overload, system programming and door opener programming.
- AC 12 V output for powering a commercially available door opener.
- Relay output to switch a door opener with its own power supply.
- Door opener switching time continuously adjustable from 1 to 10 s.

Important information

Camera or intercom provision

The intercom systems must be connected by an electrician. Please contact the electrician of your choice for planning, installation and commissioning.

Water protection

To achieve optimal protection of your mail from water, the letterbox or letterbox system should, if possible, be located under a canopy.

Mail is only protected from water if it is fully placed inside the box and the insertion flap is closed. Partially inserted mail allows moisture and dirt to enter the letterbox. This system is protected against water ingress in accordance with DIN EN 13724. Water ingress is not a reason for complaint.

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Camera, Intercom
Functional box prepared for manufacturer	GIRA
Material	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Wall throw-through
Removal of mail	On the back

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions

Height of single box in mm	200,0
Width of single box in mm	400,0
Capacity in litres	24,0 - 32,0 | 32,0 - 44,0
Height of letterbox slot in mm	35,0
Width of letter slot in mm	360,0
Total width in mm	450,0
Depth in mm	BK 300.0 - 390.0 | BK 390.0 - 560.0 | FK 100.0
Weight in kg	21
Delivery condition	Supplied partially disassembled

Dimension drawing

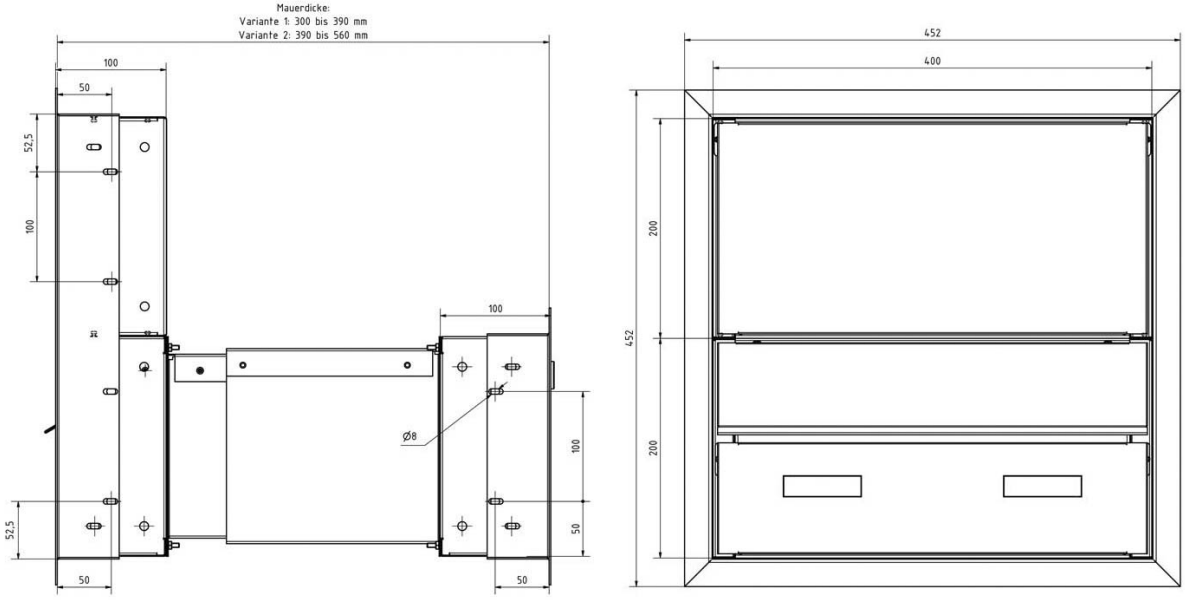



Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images

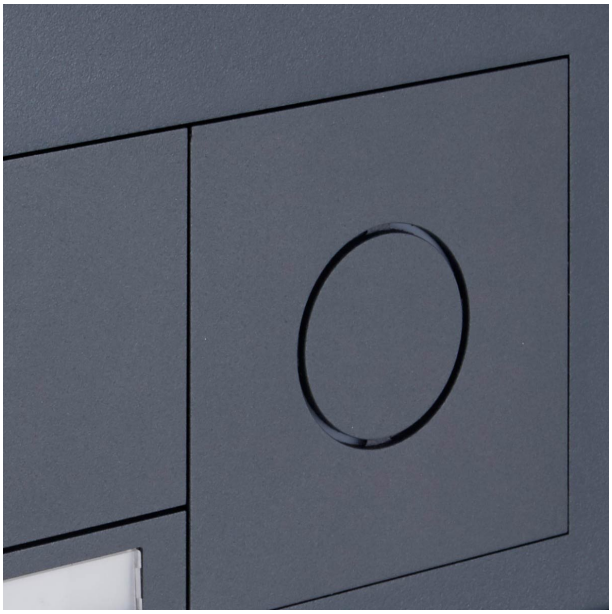

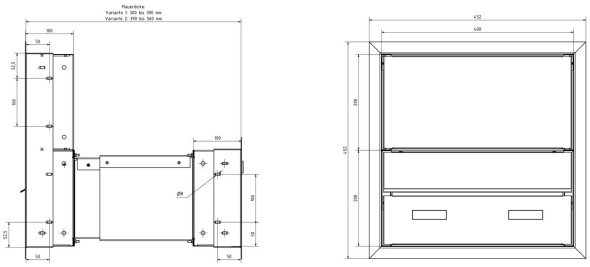

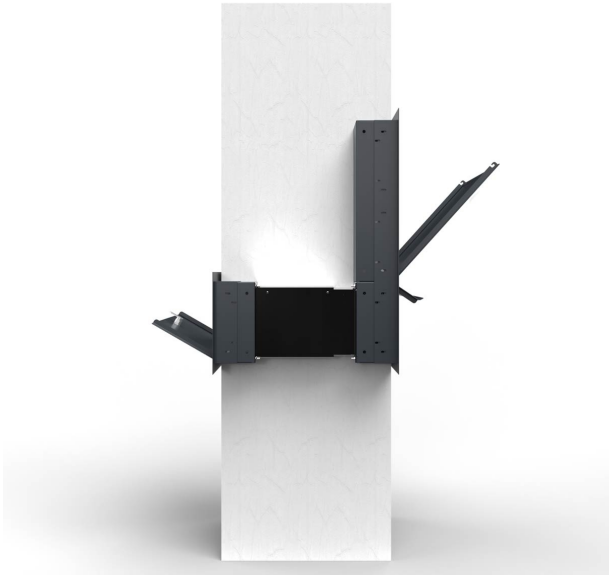



Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618









Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618