Designer flush-mounted mailbox GOETHE UP - RAL colour of your choice - GIRA System 106 Keyless In - VIDEO complete set | without newspaper compartment | 100mm depth | Gira System 106 Complete Video Set 2DB Fingerprint



Product number 215-UP-1-SP-KSGI106FP

Product description

Designer recessed letterbox GOETHE UP - RAL colour of your choice - GIRA System 106 Keyless In - VIDEO complete set

High-quality recessed letterbox with seamlessly integrated Gira System 106 in a flush-fit design. The modern GOETHE letterbox is ideal for a sophisticated entrance area. The straight-lined design without a visible lock gives this letterbox a particularly elegant appearance. 3 GIRA system modules are included, so the letterbox can be used immediately. The matching GIRA apartment station and the control unit to complete this letterbox are included. The modules can be exchanged later at any time using the simple mounting system.

The dimensions of the single box provide a capacity of approx. 16 litres; the large inlet ensures that even DIN-C4 envelopes and magazines, or post accumulated during several days away, are not crumpled. The innovative Push-Key lock is hidden invisibly inside the letterbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the arrangement of the lock, this letterbox is designed so that the collection door prevents your mail from falling towards you. Thanks to the water-drip edge, the mail stored inside is optimally protected against the weather. The inlet flap is fitted with high-quality hinge dampers, ensuring a very quiet closing and preventing annoying rattling due to the weather.

The GOETHE collection letterbox systems are characterised by the consistent use of stainless steel. The result is very high durability and sustainability. The construction has been developed by our own engineers with a focus on high flexibility/modularity, simple spare-part assembly and uncomplicated DIY installation. Spare parts for all GOETHE systems are available directly in our shop.

Thanks to the construction method, self-installation is straightforward.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Recessed letterbox completely made of stainless steel.
- Quality manufacturing - Made in Germany by Briefkasten Manufaktur Lippe.
- Letterbox (BH 400x400mm) made of stainless steel 1.4016 (corrosion-resistant magnetic stainless steel), powder-coated in a RAL colour of your choice.
- Innovative Push-Key lock with 2 keys.
- Letter insertion and collection from the front. Inlet flap with high-quality hinge dampers for very quiet post insertion.
- The letterbox complies with DIN/EN 13724. Inlet size (3.5 cm x 36.0 cm) for C4 landscape; large letters fit in without folding.
- Collection door opens from top to bottom. This prevents your mail from falling out towards you.
- Function box (BH 400x200mm) made of stainless steel 1.4016 (corrosion-resistant magnetic stainless steel), powder-coated in a RAL colour of your choice.
- Nameplate made of stainless steel, powder-coated in RAL colour. A bell symbol is lasered on.
- Optional name inscription approx. 15–20 mm high.
- Optional house number inscription approx. 70–80 mm high.
- Plaster cover frame made from 2 mm stainless steel angle profile 25 x 58 mm, powder-coated in RAL colour.
- Incl. GIRA apartment station, power supply & control unit included; System 106 door station module, Keyless In fingerprint module & camera module installed.

GIRA

Camera module Gira System 106 - 5561 000, installed without cabling

- Behind the interchangeable black glass pane is a high-quality camera with high light sensitivity. Thanks to a detection angle of 100°, the user always has a clear view of what is happening at their front door.

Keyless In fingerprint module Gira System 106 - 5551 920, installed

The GIRA fingerprint module is a professional biometric access control system based on the new-generation area-scan technology. Commissioning and user management are carried out via the Gira Keyless In app.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Use as a stand-alone device with Gira TKS switching actuators or in combination with the Gira door communication system as a door-call system for buildings with multiple residential units.
- Scanning of the lowest skin layer using high frequency. High recognition rate and tamper resistance.
- Evaluation of the unique characteristic features of the living human finger.
- Up to 99 fingers can be managed by the fingerprint reader.
- Reliable recognition of fingers that have, for example, been slightly injured during gardening (only the outermost skin layer has been injured).
- Data protection through encryption procedures.
- Fast reaction time from placing the finger to release: up to 30 stored fingers approx. 1 s, up to 99 stored fingers approx. 3 s.
- Night-time design of the fingerprint surface for orientation using white LED illumination.
- 360° finger placement possible.
- 3-coloured LED status indicator for optical signalling during programming and operation.
- Master PIN number on the enclosed sealed security card if the administrator finger is no longer available. The device can be factory-reset with the enclosed security card.
- Acknowledgement buzzer for acoustic signalling for the user or installer.
- Acoustic warning tone in case of unauthorised removal of the fingerprint unit for sabotage detection. Sabotage circuit with switching actuator in the door communication system.
- Inputs and outputs: plug connector for connection cable to the Gira door communication system.

Door station module Gira System 106 - 5565 920, installed without cabling

- Compact voice module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good intelligibility.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. required from the 3rd camera module onwards).
- All other System 106 modules (except the voice module) are supplied with power via the door station module.

GIRA Video indoor station AP 7 1209xx, included

- Video indoor station with a 17.78 cm (7") TFT colour display and comfortable hands-free function for surface-mounted installation or wall mounting with a flush-mounted device box or cavity wall box. With the optional stand (see Accessories) also suitable for placement on furniture. A 32 GB SD memory card is included for internal image storage. Full-surface glass front with touch functionality and tactile feedback.

Video control unit REG Gira 1288 00, included

- Control unit for powering the audio and video components of the Gira door communication bus.
- Supply of the polarity-proof and short-circuit-proof 2-wire bus when using video components such as colour camera and TFT colour display.
- Up to 2 door stations with colour camera and 28 indoor stations with TFT colour display can be supplied via the video control unit.
- In total, up to 15 colour cameras can be controlled by the video control unit (5 video door stations and 10 TKS camera gateways), of which two door stations with colour camera can be powered by the video control unit. The additional colour cameras must each be operated with their own power supply for door communication.
- Self-resetting electronic short-circuit and overload detection of the operating voltages and the bus connection.
- Buttons for system and door opener programming.
- LED status indicators for operation, overload, system programming and door opener programming.
- AC 12 V output for powering a standard door opener.
- Relay output for switching a door opener with its own power supply.
- Door opener switching time infinitely adjustable from 1 to 10 s.

Power supply DC 24 V 300 mA Gira 1296 00, included

- DC 24 V power supply for door communication components.
- Supply for Keyless In module.

Important information

Camera or intercom preparation

The intercom systems must be connected by a qualified electrician. For planning, installation and commissioning, please consult a qualified electrician you trust.

Water protection

To achieve optimal water protection for your mail, the letterbox or letterbox system should, if possible, be located under a porch or canopy.

Mail is only protected from water if it is placed completely inside the box and the inlet flap is closed. Partially inserted mail allows moisture and dirt to enter the letterbox. This system is protected against water ingress according to DIN EN 13724. Water ingress is not grounds for a complaint.

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Camera, Intercom, Fingerprint
Functional box prepared for manufacturer	GIRA
Material	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Flush-mounted

Dimensions

Height of single box in mm	400.0
Width of single box in mm	400.0
Capacity in litres	16.0
Height of letterbox slot in mm	35.0
Width of letter slot in mm	360.0
Height of letterbox in mm	External dimension 652.0 | Installation dimension 620.0
Width of letterbox system in mm	External dimension 450.0 | Installation dimension 420.0
Total width in mm	450.0
Depth in mm	100.0 | Installation dimension 103.5
Weight in kg	17
Delivery condition	Delivered assembled

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images









Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618



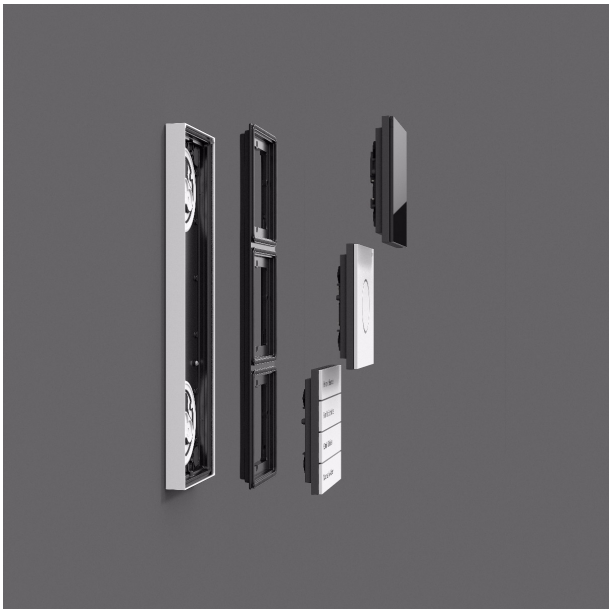





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

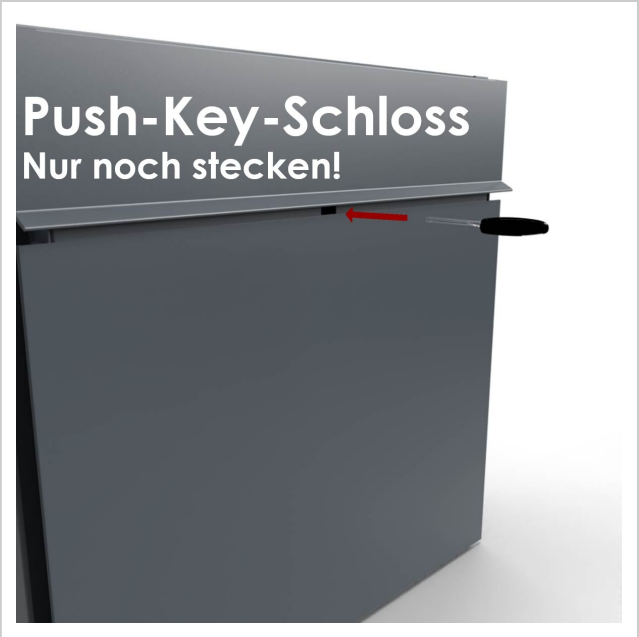

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618