Design flush-mounted mailbox GOETHE UP, side-mounted, with GIRA System 106 - RAL colour of choice - AUDIO complete set | Left | without newspaper compartment | Gira System 106 complete set Audio 2DB



Product number 215-UP-1-SPS-KSAGI106-L

Product description

Designer flush-mounted mailbox GOETHE UP side-mounted with GIRA System 106 - RAL of your choice - AUDIO complete set

High-quality flush-mounted mailbox with seamlessly integrated GIRA System 106 in a flush design. The modern GOETHE mailbox is ideal for sophisticated entrance areas. The clean-lined design without a visible lock gives this mailbox an especially elegant appearance. 3 GIRA System modules are included, so the mailbox can be used immediately. The matching GIRA indoor station and the control unit to complete this mailbox are included. The modules can be exchanged at any time afterwards thanks to the simple mounting system.

The dimensions of the single box provide a capacity of approx. 16 litres; the large slot ensures that DIN C4 envelopes and magazines are not creased, even after several days away. The innovative push-key lock is hidden invisibly inside the mailbox. The key is simply inserted into the existing opening (no turning necessary) and the door opens. With the position of the lock this mailbox is designed so that the retrieval door prevents your post from falling out towards you. The internal post is optimally protected from the weather by the water-drip edge. The insertion flap is equipped with high-quality hinge dampers, ensuring quiet closing and preventing annoying rattling due to weather influences.

The GOETHE mailbox systems are characterised by the consistent use of stainless steel. The result is very high durability and sustainability. The construction has been developed by our own engineers with a view to high flexibility and modularity, simple spare part assembly and uncomplicated self-installation. Spare parts for all GOETHE systems are available directly in our shop.

Thanks to the design, self-installation is uncomplicated.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Flush-mounted mailbox completely made of stainless steel.
- Quality manufacture - Made in Germany by Briefkasten Manufaktur Lippe.
- Mailbox (W x H 400x400mm) made of stainless steel 1.4016 (rust-resistant magnetic stainless steel), powder-coated in RAL of your choice.
- Innovative push-key lock with 2 keys.
- Letters are inserted and removed from the front. Insertion flap with high-quality hinge dampers for very quiet posting of mail.
- The mailbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 landscape; large envelopes fit in without bending.
- The retrieval door opens from top to bottom, preventing your post from falling out towards you.
- Optionally with house number and name inscription, laser-engraved.
- Function compartment (W x H 400x200mm) made of stainless steel 1.4016 (rust-resistant magnetic stainless steel), powder-coated in RAL of your choice.
- Doorbell nameplate made of stainless steel, powder-coated in RAL colour. A bell is laser-engraved on the nameplate for better recognition.
- Plaster cover frame made of stainless steel angle profile 25 x 58 mm, powder-coated in RAL colour.
- Incl. GIRA indoor station & control unit supplied, System 106 door station module installed.

GIRA

Door station module Gira System 106 - 5565 920, installed without wiring

- Compact audio module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good intelligibility.
- Power supply via 2-wire bus. Additional connection for central locking (ZV) (e.g. required from the 3rd camera module).
- All other System 106 modules (except the audio module) are powered via the door station module.

Surface-mounted indoor station Gira 1250XX, supplied

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Completely preassembled surface-mounted indoor station, allowing quick and neat installation.
- Design variety through integration into the switch range, resulting in a consistent appearance of door communication and electrical installation.
- Can be installed both with and without a cover frame.
- Easy installation thanks to plug-in screw terminals on the mounting plate. The connection to the indoor station is made when the indoor station is plugged onto the mounting plate.
- Simple removal of the indoor station for renovation work.
- Mounting holes provided.
- Signal transmission and power supply of the indoor station via a polarity-proof and short-circuit-resistant 2-wire bus.
- Parallel connection of up to three indoor stations possible (when powered via the 2-wire bus).
- Single-person commissioning via a simple start-up procedure.
- Distinctive ringtones for door call, internal call and floor call.
- Selection of five different ringtones, which can be individually assigned to the call buttons.
- Hands-free function (voice-operated two-way communication with echo and background noise suppression).
- Override function for noisy environments during a conversation.
- Privacy lock.
- Control buttons with integrated LEDs for status indication.

Audio control unit REG Gira 128700, supplied

- Supply for the polarity-proof and short-circuit-resistant 2-wire bus.
- Self-resetting electronic short-circuit and overload detection of the operating voltages and the bus connection.
- Buttons for system and door opener programming.
- LED status indicators for operation, overload, system programming and door opener programming.
- AC 12 V output for powering a conventional door opener.
- Permanent AC 12 V output for powering a TKS-TK gateway.
- Relay output for switching a door opener with its own power supply.
- Door opener switching time continuously adjustable from 1 to 10 s.

Important information

Provision for camera or intercom

The intercom systems must be connected by a qualified electrician. For planning, installation and commissioning, please contact the electrician of your choice.

Water protection

To achieve optimal water protection for your mail, the mailbox or mailbox system should, if possible, be located under a porch or canopy.

Mail is only protected from water if it is placed completely inside the box and the insertion flap is closed. Mail that is not fully pushed in allows moisture and dirt to enter the mailbox. This system is protected against water ingress in accordance with DIN EN 13724. Water ingress is not a reason for complaint.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Intercom, Fingerprint, Keypad
Functional box prepared for manufacturer	GIRA
Material	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Flush-mounted

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions


Height of single box in mm	400,0
Width of single box in mm	400,0
Capacity in litres	16
Height of letterbox slot in mm	35,0
Width of letter slot in mm	360,0
Height of letterbox in mm	External dimension 450.0 | installation dimension 403.0
Width of letterbox system in mm	External dimension 652.0 | installation dimension 605.0
Total width in mm	652,0
Depth in mm	100.0 | installation dimension 103.5
Weight in kg	12
Delivery condition	Delivery is assembled

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimension drawing

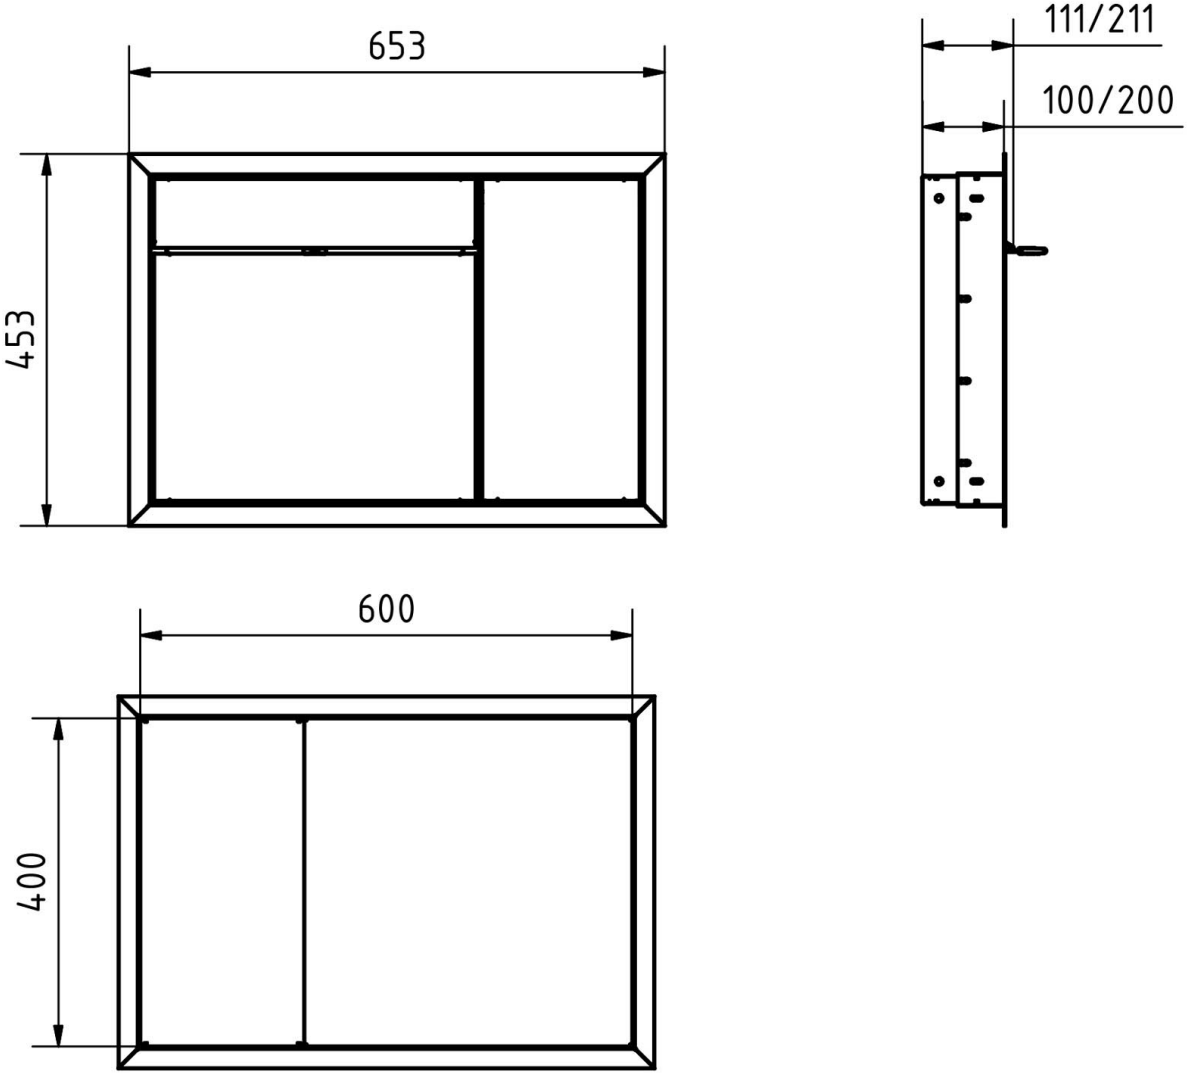

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images





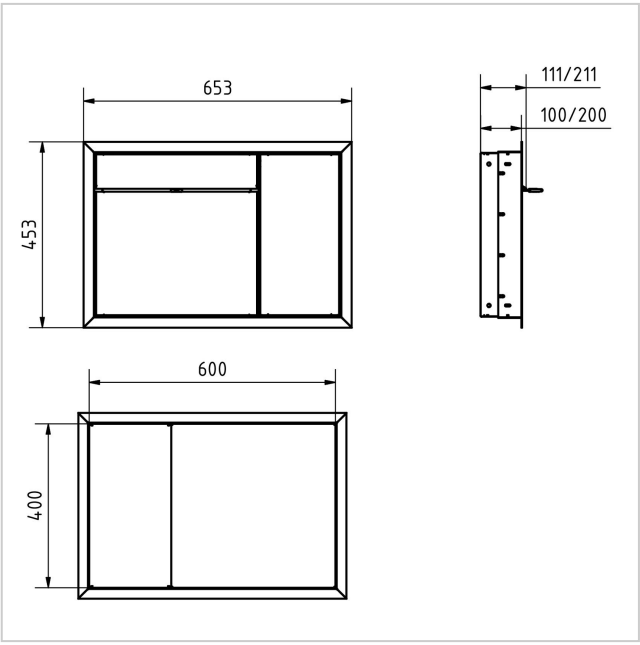



Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618










Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

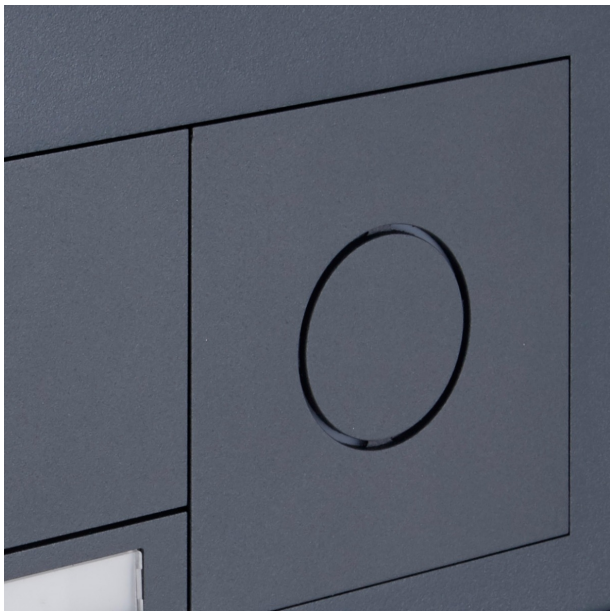



Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618