Design through-wall letterbox GOETHE MDW - RAL colour of your choice - GIRA System 106 Keyless In - VIDEO complete set | 390-560mm depth | Gira System 106 Complete Video Set 2DB Fingerprint



Product number 215-MDW-1-SP-KSGI106FP-56

Product description

Design through-wall letterbox GOETHE MDW - RAL colour of your choice - GIRA System 106 Keyless In - VIDEO complete set

The modern GOETHE through-wall letterbox with seamlessly integrated Gira System 106 with fingerprint in a flush-mounted design is ideal for a high-quality entrance area. The straight-lined form gives this letterbox a particularly elegant appearance. With a variable shaft length between 300 mm and 390 mm or 390 mm and 560 mm, this letterbox can be used in almost any masonry. 3 GIRA system modules are included, so the letterbox can be used immediately. The matching GIRA indoor station and the control unit to complete this letterbox are included. The modules can be exchanged at any time afterwards via the simple mounting system.

The dimensions of the individual boxes allow a capacity of approx. 24–44 litres; the large entry guarantees that even DIN-C4 envelopes and magazines, or post after several days’ absence, will not be creased. The water-drip edge optimally protects the inner mail from weather influences. The entry flap is fitted with high-quality pivot dampers, ensuring quiet closing and preventing annoying rattling caused by weather.

The letterbox systems of the GOETHE collection are characterised by the consistent use of stainless steel. The result is very high durability and sustainability. The construction has been developed by our own engineers with a view to high flexibility and modularity, simple spare-part assembly and uncomplicated self-installation. Spare parts for all GOETHE systems are available directly from our shop.

Thanks to the design, self-installation is straightforward.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- High-quality through-wall letterbox made entirely of stainless steel.
- Shaft made of stainless steel 1.4016 (magnetic stainless steel), untreated.
- Body made of stainless steel 1.4016 (magnetic stainless steel), powder-coated in RAL colour of your choice.
- Quality manufacture - Made in Germany by Briefkasten Manufaktur Lippe.
- The letterbox complies with DIN/EN 13724. Entry size (3.5 cm x 36.0 cm) for C4 landscape; large letters fit without bending.
- Letter entry and retrieval door made of stainless steel V2A 1.4301, powder-coated in RAL colour of your choice.
- Letter entry and retrieval are from the front. Entry flap with high-quality pivot dampers for very quiet post insertion.
- Retrieval door opens from top to bottom, so the mail cannot fall out towards you.
- Function box (W x H 400 x 200 mm) made of stainless steel 1.4016 (magnetic stainless steel), powder-coated in RAL colour of your choice.
- Nameplate made of stainless steel, powder-coated in RAL colour. Your name and/or a doorbell can optionally be laser-engraved onto the nameplate.
- Optional house number, laser-engraved (a name inscription can also be stored here).
- Including GIRA indoor station, power supply & control unit included, System 106 door station module, Keyless In fingerprint module & camera module fitted.
- Plaster cover frame made of stainless steel angle profile 25 x 58 mm, powder-coated in RAL colour.
- Variable shaft length 300–390 mm or 390–560 mm. External dimensions of letter drop shaft W 380 mm x H 180 mm.
- External dimensions front side W 450 mm x H 450 mm; rear W 450 mm x H 250 mm.

GIRA

Camera module Gira System 106 - 5561 000, fitted without wiring

- Behind the exchangeable black glass pane hides a high-quality camera with high light sensitivity. With a field of view of 100° the user is always informed about what is happening at their front door.

Keyless In fingerprint module Gira System 106 - 5551 920, fitted

The GIRA fingerprint module is a professional biometric access control system based on next-generation surface-scan technology. Commissioning and user management are carried out via the Gira Keyless In app.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Can be used as a stand-alone device with Gira TKS switching actuators or in combination with the Gira door communication system as a door-call system for buildings with multiple residential units.
- Scans the innermost layer of skin using high frequency. High recognition rate and tamper resistance.
- Evaluates the unique characteristic features of the living human finger.
- Up to 99 fingers can be managed by the fingerprint reader.
- Reliable recognition of fingers that have, for example, been slightly injured during gardening (only the top layer of skin has been affected).
- Data protection through encryption methods.
- Fast response time from placing the finger to release: approx. 1 s for up to 30 stored fingers, approx. 3 s for up to 99 stored fingers.
- Illuminated fingerprint surface with white LED for orientation at night.
- 360° finger placement possible.
- 3-colour LED status indicator for optical signalling during programming and operation.
- Master PIN number on the enclosed sealed security card in case the administrator finger is no longer available. The device can be factory-reset with the enclosed security card.
- Acknowledgement buzzer for acoustic signalling for the user or installer.
- Acoustic warning tone in case of unauthorised removal of the fingerprint unit for tamper detection. Tamper circuit with switching actuator in the door communication system.
- Inputs and outputs: plug strip connection cable for the Gira door communication system.

Door station module Gira System 106 - 5565 920, fitted without wiring

- Compact voice module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof speaker ensure good intelligibility.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. required from the 3rd camera module).
- All other System 106 modules (except the voice module) are supplied with power via the door station module.

Indoor station Gira Video AP 7 1209xx, included

- Video indoor station with a 17.78 cm (7") TFT colour display and convenient hands-free function for surface mounting or wall mounting with a flush-mounted device box or cavity wall box. With the optional stand (see Accessories) also suitable for placement on furniture. A 32 GB SD memory card is included for internal image storage. Full-surface glass front with touch functionality and tactile feedback.

Video control unit REG Gira 1288 00, included

- Control unit for supplying the audio and video components of the Gira door communication bus.
- Supplies the polarity-proof and short-circuit-proof 2-wire bus when using video components such as colour camera and TFT colour display.
- Up to 2 door stations with colour camera and 28 indoor stations with TFT colour display can be supplied via the video control unit.
- In total, up to 15 colour cameras can be controlled by the video control unit (5 video door stations and 10 TKS camera gateways), of which two door stations with colour camera can be powered by the video control unit. The additional colour cameras must each be operated with their own power supply for door communication.
- Self-resetting electronic short-circuit and overload detection of the operating voltages and the bus connection.
- Buttons for system and door-opener programming.
- LED status indicators for operation, overload, system programming and door-opener programming.
- AC 12 V output for powering a conventional door opener.
- Relay output for switching a door opener with its own power supply.
- Door opener activation time continuously adjustable from 1 to 10 s.

Power supply DC 24 V 300 mA Gira 1296 00, included

- DC 24 V power supply for powering door communication components.
- Supplies the Keyless In module.

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Please contact the electrician of your choice for planning, installation and commissioning.

Water protection

To achieve optimal water protection for your mail, the letterbox or letterbox system should, where possible, be located under an overhang.

Mail is only protected from water if it is placed completely inside the box and the insertion flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the letterbox. This system is protected against water ingress in accordance with DIN EN 13724. Water ingress is not grounds for complaint.

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Camera, Intercom, Fingerprint
Functional box prepared for manufacturer	GIRA
Material	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Number of boxes	with 1 letterbox
Boxes by volume	Jumbo > 30 litres
Mounting type	Wall throw-through
Removal of mail	On the back

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions

Height of single box in mm	200,0
Width of single box in mm	400,0
Capacity in litres	24,0 - 32,0 | 32,0 - 44,0
Height of letterbox slot in mm	35,0
Width of letter slot in mm	360,0
Total width in mm	450,0
Depth in mm	BK 300.0 - 390.0 | BK 390.0 - 560.0 | FK 100.0
Weight in kg	21
Delivery condition	Supplied partially disassembled

Dimension drawing

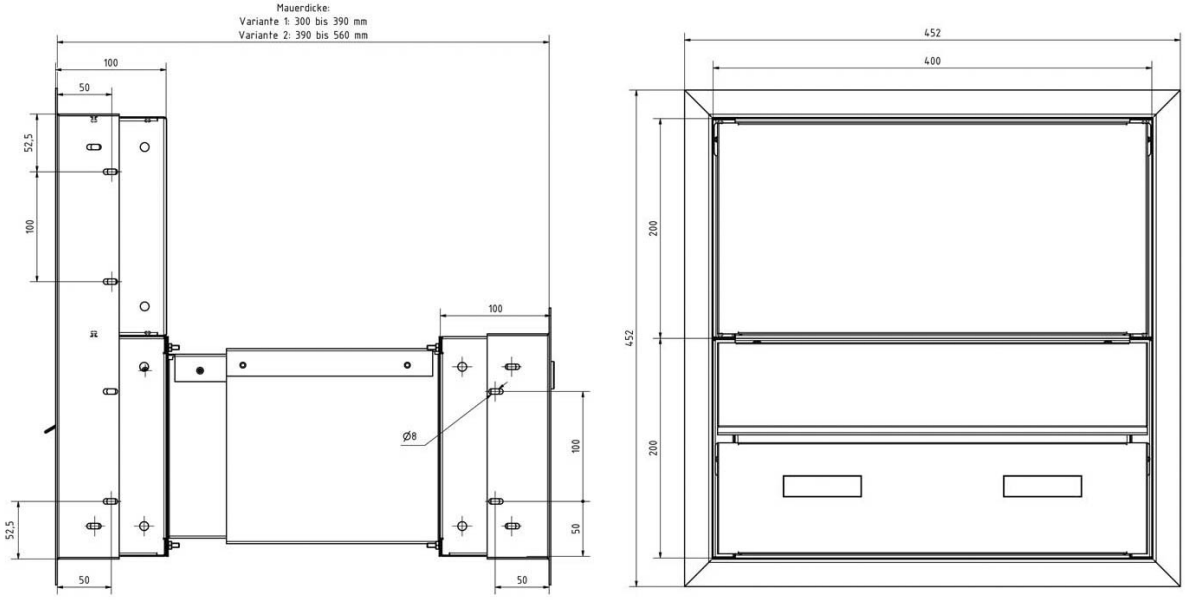

More images





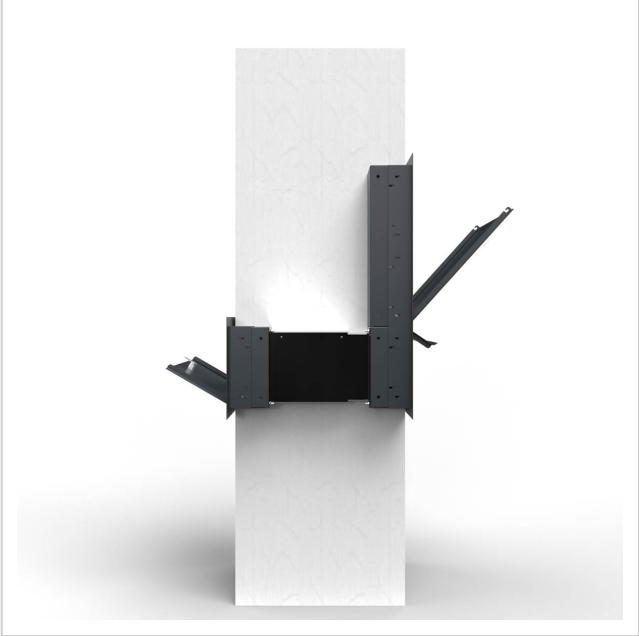



Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

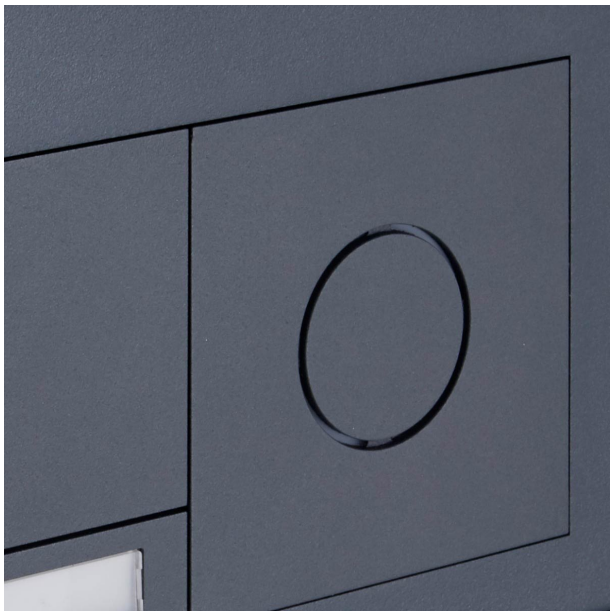



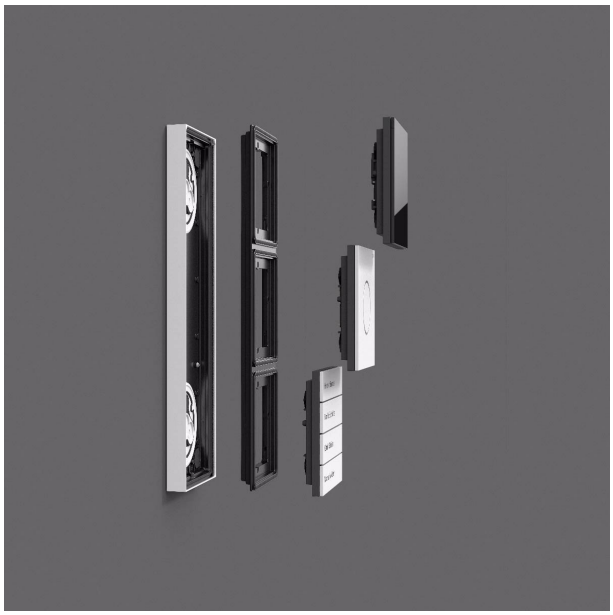



Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618



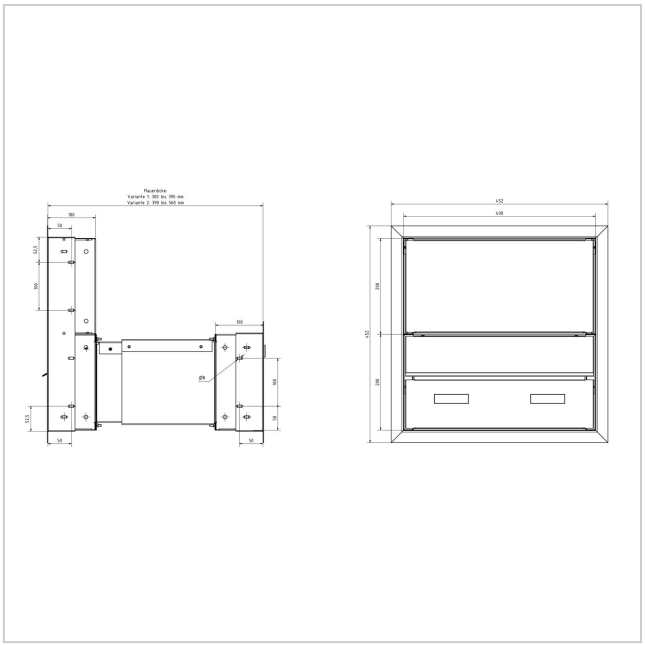

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618