
Gira System 106 Full-HD IP camera module - detection angle 126° - black glass

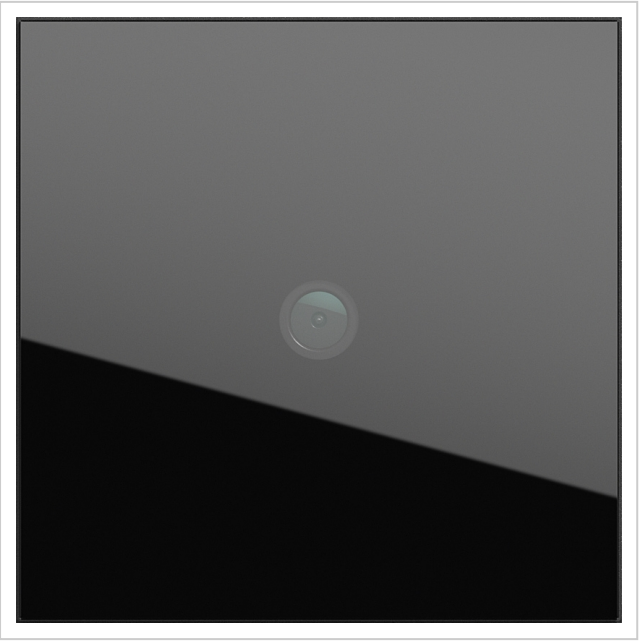

Product number S106-5562000

Product description

Gira System 106 Camera Module IP

The **Gira System 106 Camera Module IP** expands the **Gira Door Communication IP** system with a powerful video function for the entrance area. The module is designed for use within the **Gira System 106** and enables high-quality image transmission for modern door stations in residential and commercial buildings.

Behind the replaceable **black glass panel** is a high-quality **Full HD camera** with high light sensitivity. This allows the camera module to deliver clear and detailed images even in challenging lighting conditions. With a generous **horizontal field of view of 126°**, the module offers a wide overview of the entrance area and supports reliable visitor identification.

In darkness the camera automatically switches to **night mode** and provides stable image transmission even under limited visibility conditions. This makes the **Camera Module IP** particularly suitable for demanding installations where reliable video surveillance at the entrance is required.

The module is integrated into the system via a **10-pole flat ribbon cable** and can be harmoniously incorporated into the modular design of the **Gira System 106**. In conjunction with the matching **Speech Module IP**, a high-quality door station with audio and video functions is created.

Features

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Camera module for the **Gira Door Communication IP**
- High-quality **Full HD camera** with 1920 x 1080 pixels
- Replaceable **black glass panel**
- High light sensitivity for clear images in challenging lighting conditions
- Wide field of view of **126° horizontal**
- Automatic **night mode** in darkness
- Suitable for modular configuration in the **Gira System 106**

Technical Data

Connections	Power supply via flat ribbon cable, 10?pole Video: 1 x connector strip System: 2 x connector strip
Power consumption (standby)	130 mW
Power consumption (standby and heater)	1.36 W
Power consumption (active, day)	1.53 W
Power consumption (active, night)	3.32 W
Camera sensor	CMOS
Resolution	Full HD 1920 x 1080p, 16:9, at 2 MP
Visible field of view	67° vertical, 126° horizontal
Contrast ratio	800:1
Ambient temperature	-20 °C to +50 °C
Protection rating	IP54
Dimensions	W 106.5 x H 106.5 x D 28.7 mm

For installation, a suitable **System 106 enclosure** and the **Gira Speech Module IP** are required.

Product properties

Connection technology LAN

Dimensions

Width in mm	106.5
Height in mm	106.5
Total width in mm	106.5
Depth in mm	20.0
Weight in kg	0,5

More images









Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618