13-unit freestanding mailbox system Design BASIC 385P-7016-SP with bell-intercom unit incl. side cladding & rain canopy - horizontal mailboxes - Anthracite Grey RAL 7016 | RAL 7016 Anthracite grey, fine texture, matt | Right | with 13 mailboxes



Product number 385P-7016-13S-SP-R

Product description

Freestanding mailbox system BASIC 385P with bell/intercom unit on the right for 13 households – RAL 7016 Anthracite grey – narrow version

The freestanding BASIC 385P mailbox system for 13 households combines 13 individually usable mail compartments with an integrated bell function enclosure. This brings mail reception, doorbell buttons and the provision for a compatible door communication system together in a robust, visually cohesive entrance solution for large residential complexes, multi-occupancy buildings and commercially used properties. In this variant, the bell/intercom unit is positioned to the right of the mailbox system.

The mailboxes are made from galvanised steel and are powder-coated in RAL 7016 Anthracite grey fine-structure matt. A close-fitting side cladding with rain hood and integrated rain drainage channels support weather protection. The solidly manufactured upright posts made from anodised aluminium profile are also powder-coated in RAL 7016 Anthracite grey and form an especially stable, durable base for the freestanding system.

Each of the 13 mail compartments has an approximate volume of 12 litres. The 35 × 265 mm insertion opening is designed for DIN C4 items in portrait orientation. A noise-damping rubber lip reduces the impact of the insertion flap. Mail is collected from the front; the collection doors open from left to right. Each mailbox is supplied with two keys bearing a key number and one interchangeable nameplate below the insertion flap.

Advantages of the BASIC 385P mailbox system at a glance

Integrated bell function enclosure on the right

The system combines 13 mailboxes with 13 stainless steel bell push-buttons and a speak-through opening with universal adapter. This creates a central, tidy solution for mail and visitor communication.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Solid aluminium uprights

Solidly manufactured, anodised aluminium profiles form the stable base of the freestanding system. The powder-coated construction combines high load capacity with a durable finish for outdoor use.

DIN C4 insertion with 12 litre volume

The mailboxes each offer approximately 12 litres of mail volume. The 35 × 265 mm insertion opening accepts DIN C4 items in portrait orientation, so larger envelopes need not be unnecessarily folded.

Prepared for door communication

The speak-through opening with universal adapter is prepared for many commercially available flush-mount speakers.

Robust BASIC quality in RAL 7016 Anthracite grey

Galvanised steel, stainless steel components, solid aluminium uprights and German manufacture result in a resilient mailbox system for long-term use at the property entrance.

Equipment of the BASIC 385P mailbox system

Mailbox system

Number of mailboxes 13 individually usable mail compartments
Mailbox dimensions 300 × 110 × 385 mm (W × H × D) per compartment
Mail volume Approx. 12 litres per mailbox
Material Galvanised steel; side cladding and rain hood in stainless steel V2A
Finish RAL 7016 Anthracite grey fine-structure matt
Insertion opening 35 × 265 mm, suitable for DIN C4 portrait
Standard Mailboxes compliant with DIN EN 13724

Bell and intercom unit

Bell function enclosure Galvanised steel, powder-coated to match
Position Right
Bell push-buttons 13 round stainless steel bell push-buttons Type 4
Speak-through opening With universal adapter for commercially available flush-mount speakers
Nameplate Tamper-resistant and impact-resistant design

Solid aluminium uprights

Uprights Solidly manufactured anodised aluminium profile
Coating Powder-coated in RAL 7016 Anthracite grey
Mounting options Choice of screw fixing or in-ground concreting
Screw fixing Uprights selectable in 1200 or 1600 mm
In-ground concreting Uprights selectable in 1600 or 2000 mm
Delivery condition Uprights and mailbox system supplied divided for installation
Manufacture Made in Germany by Briefkasten Manufaktur Lippe

Note on the bell/intercom unit

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

The universal adapter is suitable for many commercially available flush-mount speakers. Intercom systems or flush-mount speakers, power supply and cabling are not part of the described standard equipment and must be provided to suit the planned system.

Mounting on a foundation

For screw fixing, a level and sufficiently load-bearing foundation is required. The fasteners must be chosen to suit the foundation, the system weight and the local installation situation.

Mounting by concreting?in

For the concreting-in version, the extended aluminium uprights are anchored vertically in a suitably dimensioned concrete foundation. Foundation size and embedment depth must be matched to ground conditions, system dimensions and local loads.

Note on weather protection

The rain hood, close-fitting side cladding and rain drainage channels support weather protection. Postal items must be fully inserted so that the insertion flaps can close completely. In extreme weather conditions, slight moisture may penetrate despite construction compliant with standards.

Product properties

Material	Steel, galvanised, Aluminium AlMg3 W19, Stainless steel V2A 1.4301
Series	BASIC
Functions	Light button, Intercom
Functional box prepared for manufacturer	GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, Comelit
Boxes by volume	Normal > 10 litres
Name labelling	Nameplate
Mounting type	Free-standing
Surface/colour	RAL 7016 anthracite grey
Removal of mail	On the front
Number of boxes	with 13 letterboxes

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions


Height of single box in mm	110.0
Width of single box in mm	300.0
Capacity in litres	12
Height of letterbox slot in mm	35.0
Width of letter slot in mm	265.0
Overall height in mm	1200.0 | 1600.0
Total width in mm	980.0
Depth in mm	435.0
Weight in kg	96
Delivery condition	Delivery is made in blocks; freestanding units / mailbox are supplied as separate parts.

Dimension drawing

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

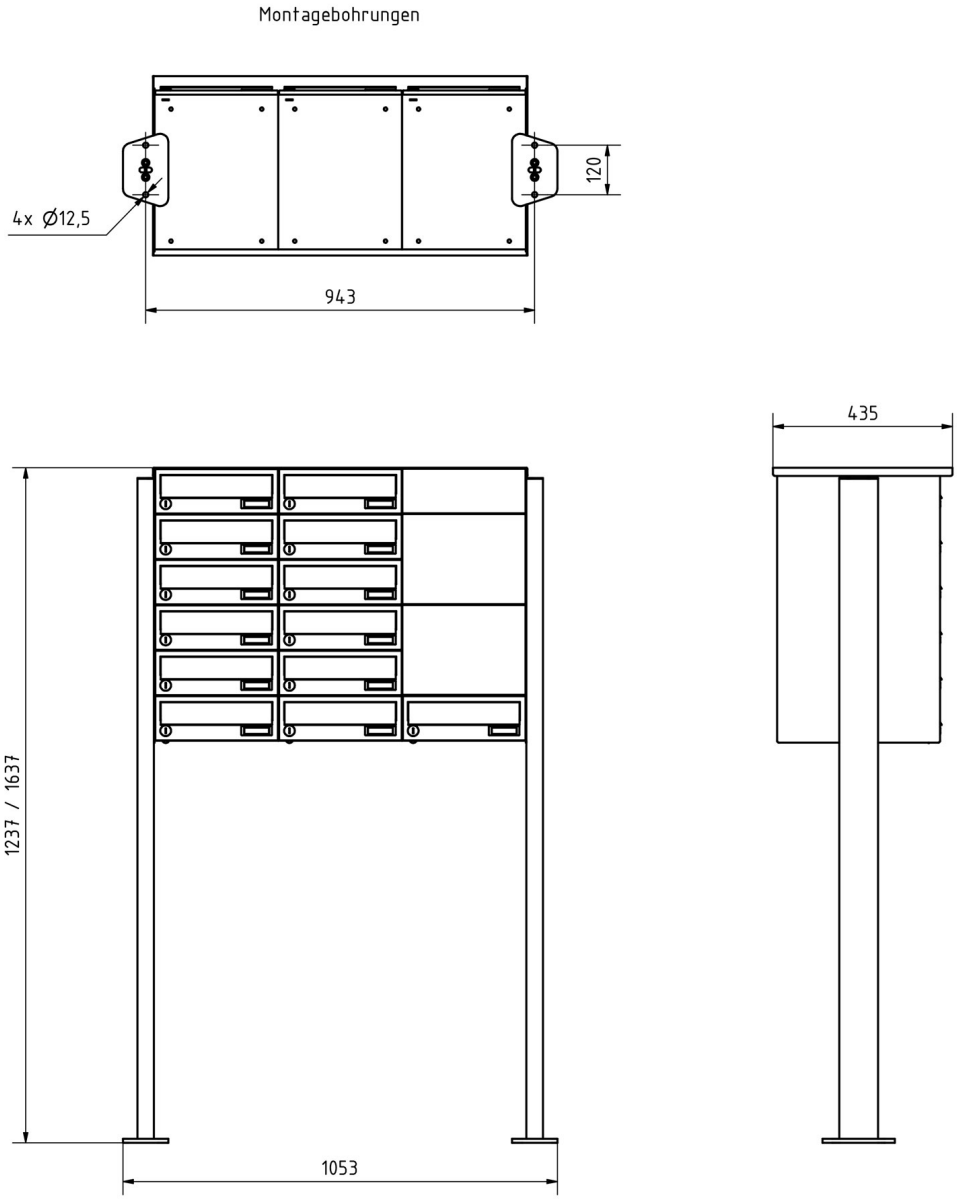

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images










Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618



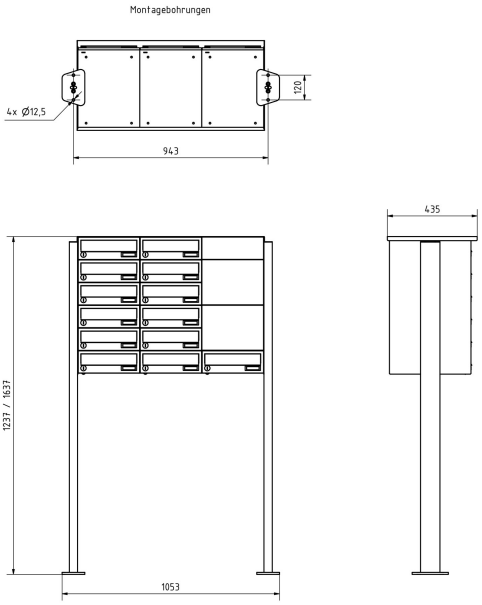





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618