3-unit design recessed mailbox GOETHE UP - RAL colour of your choice - DoorBird video intercom on the right | Right | without newspaper compartment | DoorBird | 200mm depth | with 3 mailboxes



Product number 215-UP-3-SP-DB-200-R

Product description

3-compartment design recessed mailbox GOETHE UP - RAL colour of your choice - DoorBird video intercom right

High-quality manufactured 3-compartment recessed mailbox with a seamlessly integrated DoorBird IP video door station D2100E in a flush-mounted design. The DoorBird IP video door station D2100E is the smart solution for your entrance door. The IP video door station can be operated as a standalone unit or integrated into an existing smart home platform. Existing classic installations such as a door gong or an electric door and gate opener can also continue to be used with DoorBird and be controlled via the app.

The dimensions of each individual compartment allow a capacity of approx. 16 or 32 litres; the large mail slot ensures no creased post even for DIN C4 envelopes and magazines or after several days' absence. The innovative push-key lock is invisibly concealed inside the mailbox. The key is simply inserted into the existing opening (no turning required) and the door opens. Due to the arrangement of the lock, this mailbox is designed so that the retrieval door prevents mail from falling out. Thanks to the water runoff edge, the internal mail is optimally protected from the elements. The insertion flap is fitted with high-quality hinge dampers, ensuring quiet closing and preventing annoying rattling caused by weather influences.

The mailbox systems of the GOETHE collection are characterised by the consistent use of stainless steel. The result is very high durability and sustainability. The construction has been developed by our own engineers with a focus on high flexibility/modularity, easy spare-part assembly and straightforward self-installation. Spare parts for all GOETHE systems are available directly in our shop.

Thanks to the design, self-installation is uncomplicated.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- 3-compartment recessed mailbox made entirely of stainless steel.
- Quality manufacture - Made in Germany by Briefkasten Manufaktur Lippe.
- Mailbox (BH 400x400x200 mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Innovative push-key lock with 2 keys.
- Mail insertion and retrieval are from the front. Insertion flap with high-quality hinge dampers for very quiet mail insertion.
- The mailbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 landscape, so even large letters fit without folding.
- Retrieval doors open from top to bottom. This prevents mail from falling out towards you.
- Plexiglass nameplate for name labelling and a second nameplate "Advertising Yes/No" per party.
- Function box (BH 400x400x200 mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Optional house number with energy-saving LED lighting approx. 70–100 mm high possible (depending on the number of characters).
- Plaster cover frame made from 2 mm stainless steel angle profile 25 x 58 mm, powder-coated in RAL colour.
- Includes DoorBird IP video door station D2100E + multi-tenant module MTM18A with illuminated call buttons or IP video door station D3100E with 7-inch display.

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Please consult the electrician of your choice for planning, installation and commissioning.

Water protection

To achieve optimal water protection for your mail, the mailbox or mailbox system should, where possible, be located under a canopy.

Mail is only protected from water if it is placed entirely inside the box and the insertion flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the mailbox. This unit is protected against water ingress according to DIN EN 13724. Water ingress is not a reason for complaint.

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	LAN
Number of bell push buttons	3 buttons
Functions	Camera, Intercom, Fingerprint, Keypad
Functional box prepared for manufacturer	DoorBird
Material	Aluminium AlMg3 W19, Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Boxes by volume	Jumbo > 30 litres
Number of boxes	with 3 letterboxes
Mounting type	Flush-mounted

Dimensions

Height of single box in mm	400,0
Width of single box in mm	400,0
Capacity in litres	16,0
Height of letterbox slot in mm	35,0
Width of letter slot in mm	360,0
Height of letterbox in mm	External dimension 854.0 | installation dimension 820.0
Width of letterbox system in mm	External dimension 854.0 | installation dimension 820.0
Overall height in mm	recommended 1500.0 - 1700.0
Total width in mm	External dimension 854.0 | installation dimension 820.0
Depth in mm	200.0 | installation dimension 203.5
Weight in kg	25
Delivery condition	Delivery is assembled

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images











Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

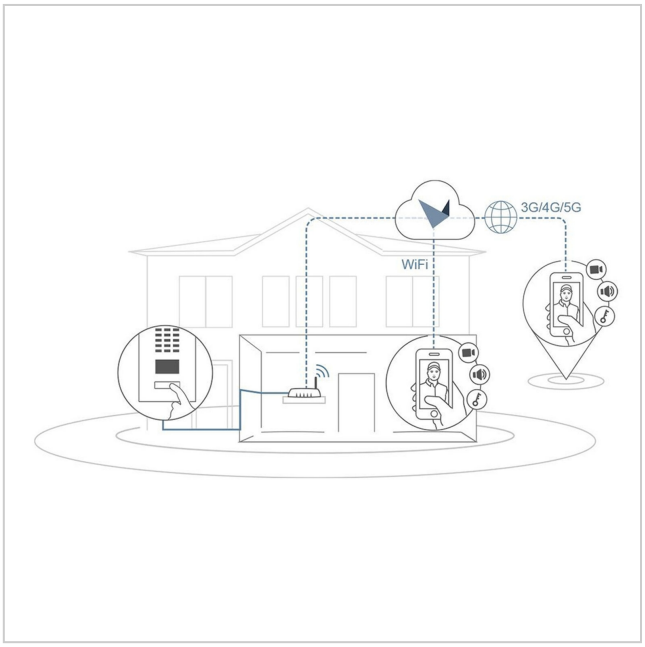


3G/4G/5G
WiFi

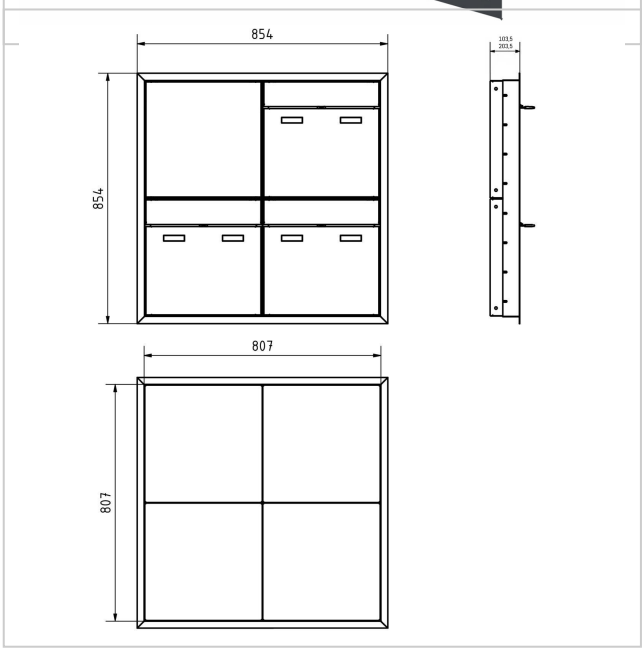
854
854
807
807