Single freestanding mailbox Design BASIC 385P-9016 ST-T with doorbell box - RAL 9016 traffic white | RAL 9016 Traffic White, fine-textured matt | Top | with 1 mailbox



Product number 385P-9016-1-SP

Product description

Freestanding mailbox BASIC 385P with bell/intercom module for one household – RAL 9016 Traffic White

The freestanding BASIC 385P mailbox for one household combines a separately usable mail compartment with an integrated bell-function box. This brings together mail reception, doorbell button and the provision for a compatible door intercom in a robust, visually closed entrance solution for single-family homes, offices and high-quality individual properties. The bell-function box is directly integrated into the overall unit.

The mailbox is made of galvanised steel and is powder-coated in RAL 9016 Traffic White with a fine-textured matt finish. A close-fitting side cladding with a rain hood and integrated rain drainage channels supports weather protection. The solidly manufactured stand elements are made from anodised aluminium profile, are also powder-coated in RAL 9016 Traffic White and form an especially stable, durable base for the freestanding unit.

The mail compartment has an approximate volume of 12 litres. The 35 × 265 mm insertion slot is designed for DIN C4 items in portrait format. A noise-damping rubber lip reduces the impact of the letter flap. Mail is removed from the front; the retrieval doors open from left to right. Each mailbox is supplied with two keys bearing the key number and a replaceable nameplate beneath the letter flap.

The advantages of the BASIC 385P mailbox system at a glance

Integrated bell-function box

The unit combines a mail compartment with a stainless-steel bell push and a speech aperture with universal adapter. This creates a central, tidy solution for mail and visitor communication.

Solid aluminium stand elements

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Solidly manufactured, anodised aluminium profiles form the stable base of the freestanding unit. The powder-coated construction combines high load capacity with a durable design for outdoor use.

DIN C4 insertion with 12-litre volume

Each mailbox offers approximately 12 litres of mail volume. The 35 × 265 mm insertion slot accepts DIN C4 items in portrait format without larger envelopes having to be unnecessarily creased.

Prepared for door communication

The speech aperture with universal adapter is prepared for many commercially available built-in speakers.

Robust BASIC quality in RAL 9016 Traffic White

Galvanised steel, stainless-steel components, solid aluminium stand elements and German manufacturing result in a resilient mailbox system for long-term use at the property entrance.

Equipment of the BASIC 385P mailbox system

Mailbox system

Number of mailboxes 1 separately usable mail compartment
Mailbox dimensions 300 × 110 × 385 mm (W × H × D) per compartment
Mail volume Approx. 12 litres per mailbox
Material Galvanised steel; side cladding and rain hood in stainless steel V2A
Finish RAL 9016 Traffic White fine-textured matt
Insertion slot 35 × 265 mm, suitable for DIN C4 portrait
Standard Mailboxes conforming to DIN EN 13724

Bell and intercom unit

Bell-function box Galvanised steel, powder-coated to match
Position Integrated into the unit
Bell push 1 round stainless-steel bell push, type 4
Speech aperture With universal adapter for commercially available built-in speakers
Nameplate Resistant to being pressed in and impact-resistant

Solid aluminium stand elements

Stand elements Solidly manufactured, anodised aluminium profile
Coating Powder-coated in RAL 9016 Traffic White
Mounting options Either screw mounting or concreting-in
Screw mounting Stand elements available in 1200 or 1600 mm
Concreting-in Stand elements available in 1600 or 2000 mm
Delivery condition Stand elements and mailbox system delivered split for assembly
Manufacture Made in Germany by Briefkasten Manufaktur Lippe

Note on the bell/intercom unit

The universal adapter is suitable for many commercially available built-in speakers. Intercom system and/or built-in speakers, power supply and cabling are not part of the described basic equipment and must be provided to suit the planned system.

Installation on a foundation

For screw mounting a level and sufficiently load-bearing foundation is required. Fixings must be selected to suit the foundation, unit weight and the local installation situation.

Installation by concreting-in

For the concreting-in version the extended aluminium stand elements are anchored plumb in a sufficiently dimensioned concrete foundation. Foundation size and embedding depth must be matched to ground conditions, unit dimensions and local loads.

Note on weather protection

The rain hood, close-fitting side cladding and integrated rain drainage channels support weather protection. Mail items must be fully inserted so that the letter flaps can close completely. Under extreme weather conditions, slight moisture ingress may occur despite norm-compliant design.

Product properties

Material	Steel, galvanised, Aluminium AlMg3 W19, Stainless steel V2A 1.4301
Series	BASIC
Number of bell push buttons	1 button
Functions	Light button, Intercom
Functional box prepared for manufacturer	GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, Comelit
Boxes by volume	Normal > 10 litres
Name labelling	Nameplate
Mounting type	Free-standing
Removal of mail	On the front
Number of boxes	with 1 letterbox
Surface/colour	RAL 9016 traffic white

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions

Height of single box in mm	110.0
Width of single box in mm	300.0
Capacity in litres	12
Height of letterbox slot in mm	35.0
Width of letter slot in mm	265.0
Overall height in mm	1200.0 | 1600.0
Total width in mm	400.0
Depth in mm	435.0
Weight in kg	21
Delivery condition	Delivery is made in blocks; stand elements / mailbox delivered in separate parts.

Dimension drawing

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Montagebohrungen

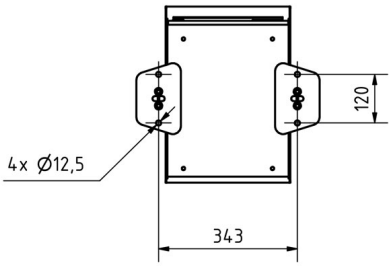

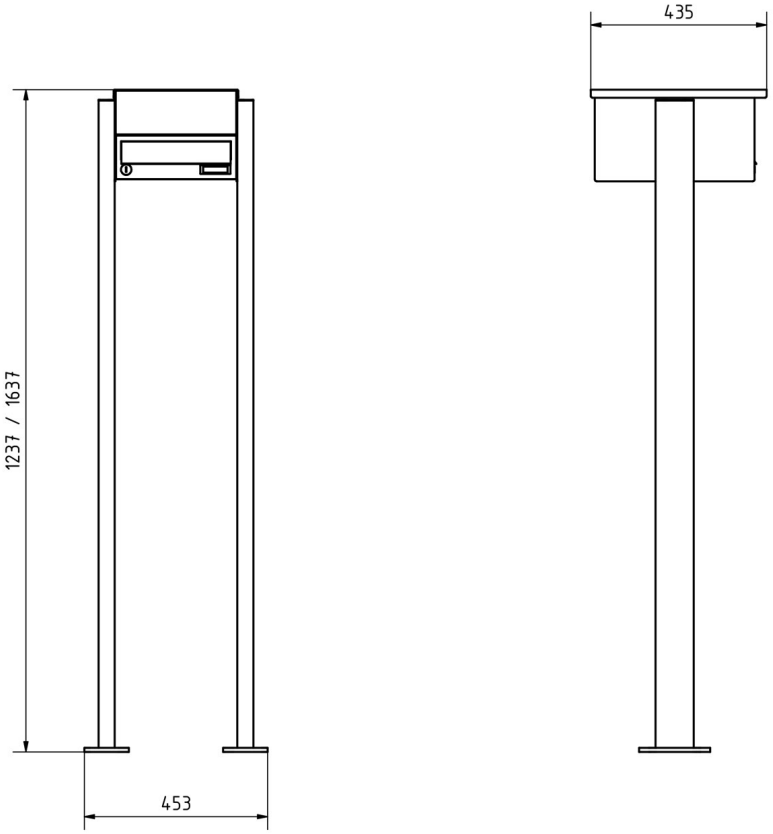

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images



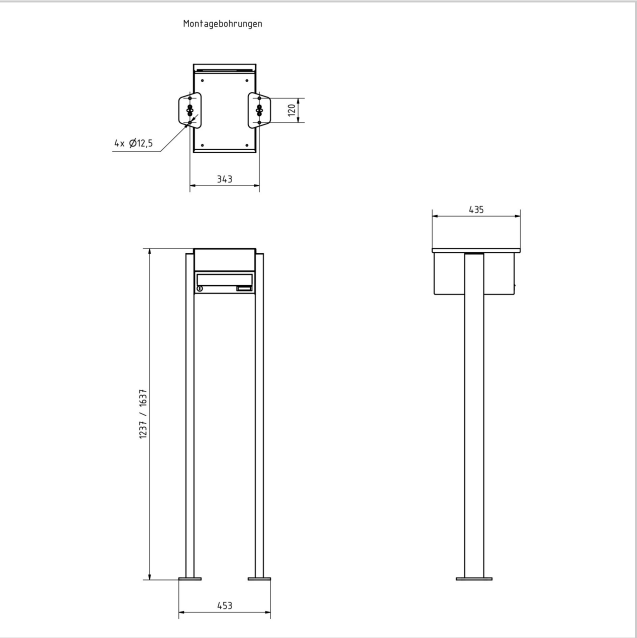





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618