Designer flush-mounted mailbox GOETHE UP with newspaper compartment - RAL colour of your choice - GIRA System 106 - Intercom - AUDIO complete set | with newspaper compartment | 100mm depth | Gira System 106 complete set Audio 2DB



Product number 215-UP-1-SP-ZF-KSAGI106

Product description

Design flush-mounted mailbox GOETHE UP with newspaper compartment - RAL of your choice - GIRA System 106 - Intercom - AUDIO complete set

High-quality flush-mounted mailbox with newspaper compartment and seamlessly integrated Gira System 106 in a flush-fit design. The modern GOETHE mailbox is ideal for discerning entrance areas. The straight-lined design without a visible lock gives this mailbox an especially elegant appearance. Three GIRA System modules are included, so the mailbox can be used immediately. The matching GIRA indoor station and the control unit to complete this mailbox are included. The modules can be subsequently exchanged as required using the simple retention system.

The dimensions of the single box provide a capacity of approx. 16 litres; the large slot guarantees that DIN C4 envelopes and magazines, or post after several days' absence, remain uncreased. The innovative Push-Key lock is hidden invisibly inside the mailbox. The key is merely inserted into the existing opening (no turning required) and the door opens. The placement of the lock is designed so that the retrieval door prevents your post from falling towards you. Thanks to the water drainage edge, the internal post is optimally protected from the weather. The mail flap is fitted with high-quality pivot dampers, ensuring quiet closure and preventing annoying rattling caused by the weather.

The mailbox systems of the GOETHE collection are characterised by the consistent use of stainless steel. The result is very high durability and sustainability. The construction has been developed by our own engineers with a view to high flexibility and modularity, simple spare-part assembly and uncomplicated self-installation. Spare parts for all GOETHE systems are available directly in our shop.

Thanks to the design, self-installation is straightforward.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Flush-mounted mailbox made entirely of stainless steel.
- Quality manufacturing - Made in Germany by Briefkasten Manufaktur Lippe.
- Mailbox (W×H 400×400 mm) made of stainless steel 1.4016 (corrosion-resistant magnetic stainless steel), powder-coated in RAL of your choice.
- Innovative Push-Key lock with 2 keys.
- Letters are inserted and removed from the front. Mail flap with high-quality pivot dampers for very quiet mail insertion.
- The mailbox complies with DIN/EN 13724. Insertion size (3.5 cm × 36.0 cm) for C4 landscape – large letters fit without bending.
- Retrieval door opens from top to bottom. This prevents your post from falling towards you.
- Newspaper compartment (W×H 400×200 mm) made of stainless steel 1.4016 (corrosion-resistant magnetic stainless steel), powder-coated in RAL of your choice with stainless steel laser engraving "NEWSPAPER" (font ARIAL; if a name/house number is chosen, it will be in your selected font).
- Newspaper compartment opens from bottom to top.
- Function box (W×H 400×200 mm) made of stainless steel 1.4016 (corrosion-resistant magnetic stainless steel), powder-coated in RAL of your choice.
- Doorbell nameplate in stainless steel, powder-coated in RAL colour. For better recognisability a bell is laser-engraved on the nameplate.
- Optionally with laser-engraved name (a house number can also be applied here).
- Optionally with laser-engraved house number (a name can also be applied here).
- Plaster cover frame made from 2 mm stainless steel angle profile 25 × 58 mm, powder-coated in RAL colour.
- Incl. GIRA indoor station & control unit included; System 106 door-station module & info or blank module installed.

GIRA

Info module Gira System 106 - 5560 920, installed

- For house numbers that should be prominently displayed.

Door station module Gira System 106 - 5565 920, installed without wiring

- Compact speech module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good intelligibility.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. required from the third camera module).
- All other System 106 modules (except the speech module) are powered via the door station module.

Surface-mounted apartment station Gira 1250XX, included

- Fully pre-assembled surface-mounted indoor station for quick and clean installation.
- Design variety through integration into the switch programme, resulting in a uniform appearance of door communication and electrical installation.
- Mounting possible with or without cover frame.
- Easy installation via pluggable screw terminals on the mounting plate. Contacting the indoor station takes place when the station is mounted onto the mounting plate.
- Simple removal of the indoor station during renovation work.
- Mounting holes for installation.
- Signal transmission and supply of the indoor station via a polarity-protected and short-circuit-proof 2-wire bus.
- Parallel connection of up to three indoor stations possible (with power supply via 2-wire bus).
- Single-person commissioning through a simple start-up procedure.
- Call tone differentiation between door call, internal call and storey call.
- Choice of five different call melodies, which can be assigned individually to the call buttons.
- Hands-free function (voice-activated two-way speech with echo and background-noise suppression).
- Override function to ensure intelligibility in noisy environments during conversation.
- Privacy lock to prevent others from listening in.
- Operating buttons with integrated LEDs for status indication.

Audio control unit REG Gira 128700, included

- Supplies the polarity-protected and short-circuit-proof 2-wire bus.
- Auto-resetting electronic short-circuit and overload detection for the operating voltages and the bus connection.
- Buttons for system and door-opener programming.
- LED status indicators for operation, overload, system programming and door-opener programming.
- AC 12 V output for powering a conventional door opener.
- Permanent AC 12 V output for powering a TKS-TK gateway.
- Relay output to switch a door opener with its own power supply.
- Door-opener switching time continuously adjustable from 1 to 10 s.

Important information

Camera or intercom preparation

Intercom systems must be connected by a qualified electrician. Please contact the electrician you trust for planning, installation and commissioning.

Water protection

To achieve optimal water protection for your mail, the mailbox or mailbox system should, where possible, be positioned under a canopy.

Mail is only protected from water when it is placed completely inside the box and the mail flap is closed. Partially inserted mail permits the ingress of moisture and dirt into the mailbox. This system is protected against water ingress according to DIN EN 13724. Water ingress is not a reason for complaint.

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Newspaper compartment, Intercom
Functional box prepared for manufacturer	GIRA
Material	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Flush-mounted

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions


Height of single box in mm	BK 400.0 | ZF 200.0
Width of single box in mm	400.0
Capacity in litres	BK 16.0 | ZF 8.0
Height of letterbox slot in mm	35.0
Width of letter slot in mm	360.0
Height of letterbox in mm	External dimension 852.0 | Installation dimension 820.0
Width of letterbox system in mm	External dimension 450.0 | Installation dimension 420.0
Total width in mm	450.0
Depth in mm	100.0 | Installation dimension 103.5
Weight in kg	17
Delivery condition	Delivered pre-assembled

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimension drawing

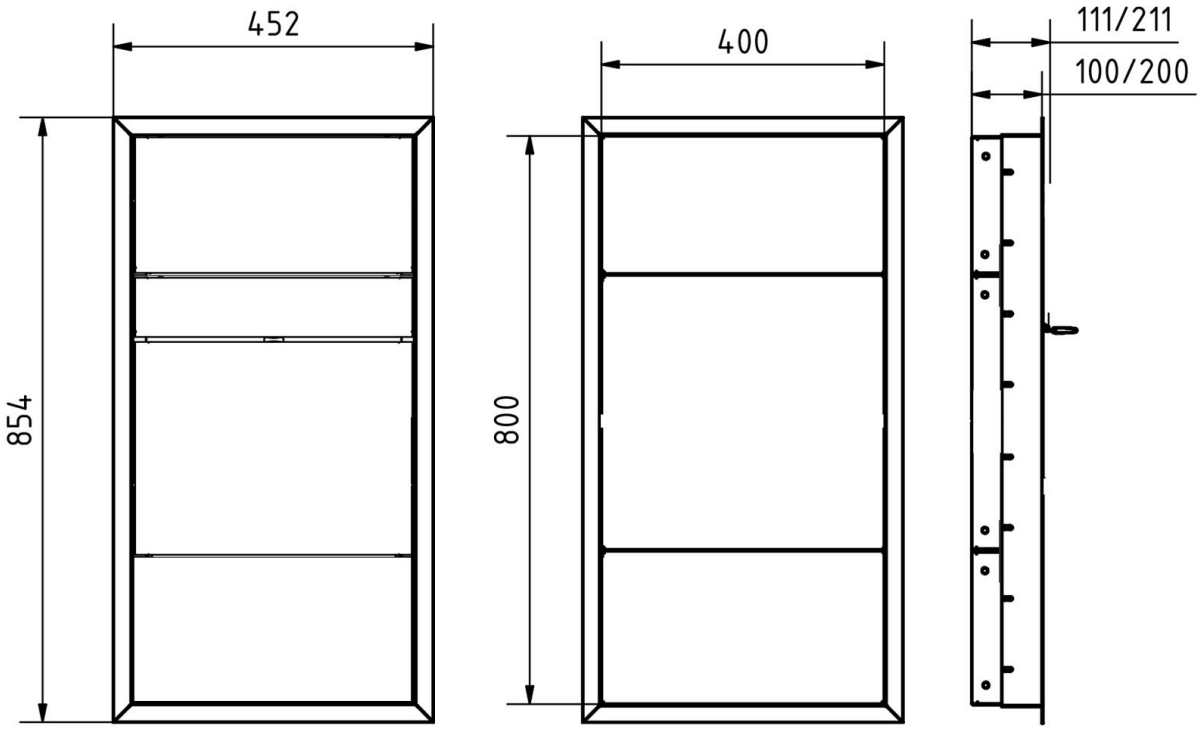

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images





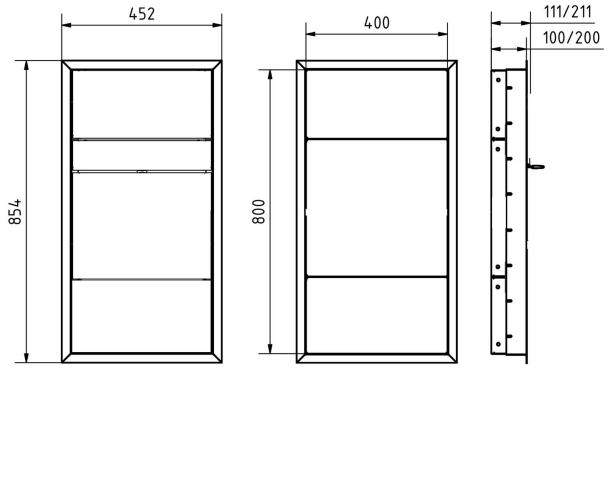




Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618





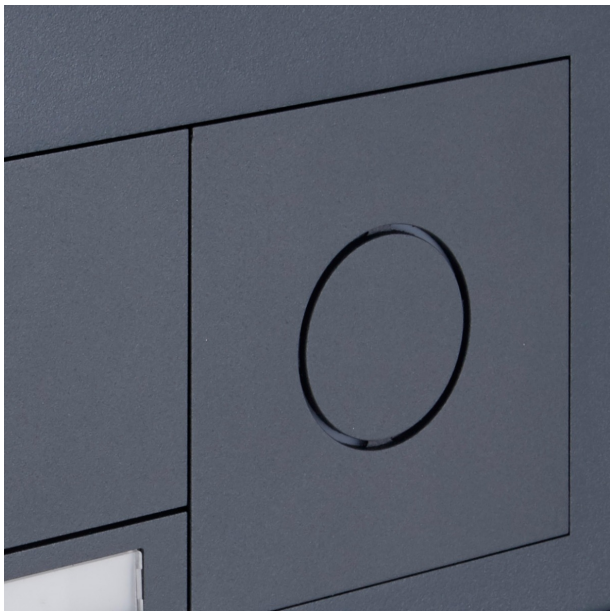



Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618







Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618