Single freestanding mailbox Design BASIC 385-VA ST-R with doorbell housing - stainless steel V2A, brushed | Top | Stainless steel, brushed | with 1 mailbox



Product number 385-VA-1-SP

Product description

Freestanding mailbox BASIC 385 for 1 party with bell/intercom unit – brushed stainless steel V2A

With 1 separately usable mailbox compartment, the freestanding BASIC 385 provides a clear mail solution for single-family houses, offices and individual commercial units. The stand mounting allows flexible positioning where the system is easily accessible for residents and delivery personnel.

The system configuration is matched to the respective number of parties and, together with a rain hood and side cladding, forms a closed unit.

The mailboxes are made of weather-resistant stainless steel V2A 1.4301 and are finely brushed. A close-fitting side cladding with rain hood combines the individual mailboxes into a single enclosed system.

Each mailbox compartment has an insertion opening of 35 × 265 mm for DIN C4 items in portrait format. A noise-reducing rubber lip minimises impact noise, while the front access doors open from left to right. Each mailbox is supplied with two keys with key number and a replaceable nameplate located below the insertion flap.

The integrated bell/intercom unit combines the bell function and preparation for an intercom system directly in the mailbox system.

The advantages of the BASIC 385 at a glance

Solid stainless steel stand elements

Round-tube stand posts with approx. 60 mm diameter made of brushed stainless steel V2A 1.4301 form a stable base for the freestanding mailbox system. The robust construction is designed for permanent use at the property entrance.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Large insertion opening to DIN EN 13724

The insertion opening of 35 × 265 mm is designed for DIN C4 items in portrait format. Larger envelopes can also be inserted without folding.

Quiet insertion and comfortable retrieval

A noise-damping rubber lip reduces the impact of the insertion flaps. Mail is retrieved from the front via doors that open from left to right.

Entirely in brushed stainless steel

The stainless steel version combines mailboxes, cladding and stand elements into a high-quality, low-maintenance complete system.

Integrated bell/intercom unit

The bell/intercom panel is integrated directly into the mailbox system.

Equipment of the BASIC 385 mailbox system

Mailbox system

Configuration Product-specific system configuration
Number of mailboxes 1 separately usable mailbox compartment
Mailbox material Stainless steel V2A 1.4301
Finish Stainless steel V2A 1.4301, brushed
Rain hood / side cladding Stainless steel V2A 1.4301, brushed
Manufacture Made in Germany by Briefkasten Manufaktur Lippe

Mail and operation

Mail slot 35 × 265 mm, suitable for DIN C4 portrait
Insertion flaps With noise-damping rubber lip
Mail retrieval Front
Door opening From left to right
Keys 2 keys with key number per mailbox
Nameplate Replaceable nameplate below the insertion flap
Standard Mailboxes in accordance with DIN EN 13724

Stand posts and equipment

Stand posts Round tube approx. 60 mm made of stainless steel V2A 1.4301, brushed
Mounting options Optionally for screw mounting or for concreting in
Fixings Anchor bolts for screw mounting not included; select appropriate fixings for the foundation separately
Bell/intercom unit Integrated functional panel
Intercom preparation Speaker cut-out with universal adapter for common built-in speakers
Doorbell button Round stainless steel doorbell buttons matching the product finish

Mailbox size and volume

The BASIC 385 is available with different mailbox sizes depending on the product configuration. The standard version 300 × 110 × 385 mm provides approx. 12 litres of volume; depending on the variant, 300 × 220 × 385 mm with approx. 25 litres of volume is also available.

Installation by concreting in

For the freestanding system we recommend a suitably dimensioned concrete foundation. When concreting in, the stainless steel stand posts must be aligned vertically and permanently anchored in the foundation. Foundation size and embedment depth must be matched to ground conditions, system weight and local circumstances.

Screw mounting on a foundation

For screw mounting, a level and load-bearing concrete foundation is required. Suitable anchor bolts or fixings should be selected to suit the substrate and system load. For the BASIC-385-ST-R variants, anchor bolts are not part of the standard scope of delivery.

Note on weather protection

Mail is best protected from moisture and soiling only when fully inserted and the insertion flap is closed. Protruding items can prevent the flap from closing completely. Under extreme weather conditions, moisture may enter the mailbox despite standard-compliant construction.

Note on bell and intercom technology

The bell/intercom unit is prepared with a speaker cut-out and universal adapter for common built-in speakers. Intercom systems or built-in speakers are not part of the standard equipment. Planning, connection and commissioning of electrical components should be carried out by a qualified electrician.

Product properties

Series	BASIC
Number of bell push buttons	1 button
Functions	Light button, Intercom
Functional box prepared for manufacturer	GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, Comelit
Boxes by volume	Normal > 10 litres
Name labelling	Nameplate
Mounting type	Free-standing
Material	Stainless steel V2A 1.4301
Removal of mail	On the front
Number of boxes	with 1 letterbox
Surface/colour	Brushed

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions

Height of single box in mm	110.0
Width of single box in mm	300.0
Capacity in litres	12
Height of letterbox slot in mm	35.0
Width of letter slot in mm	265.0
Height of letterbox in mm	220.0
Width of letterbox system in mm	300.0
Overall height in mm	1200.0 | 1500.0
Total width in mm	465.0
Depth in mm	435.0
Weight in kg	16
Delivery condition	Delivery is made in modules; freestanding units and mailbox delivered separately.


Dimension drawing


Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Montagebohrungen

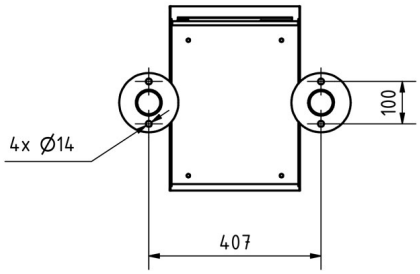

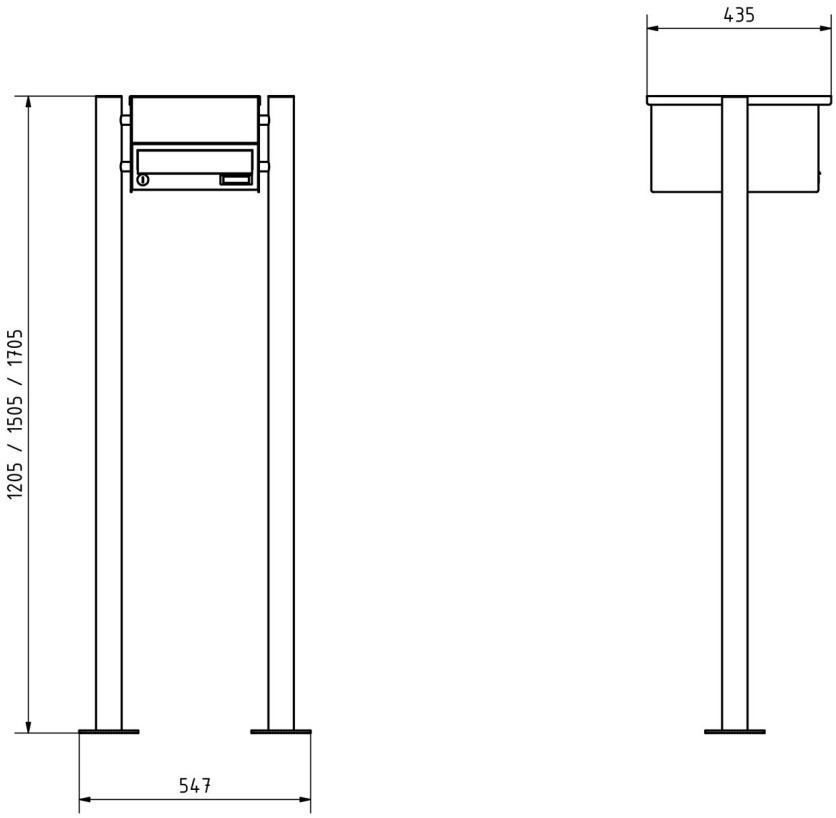

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images










Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618



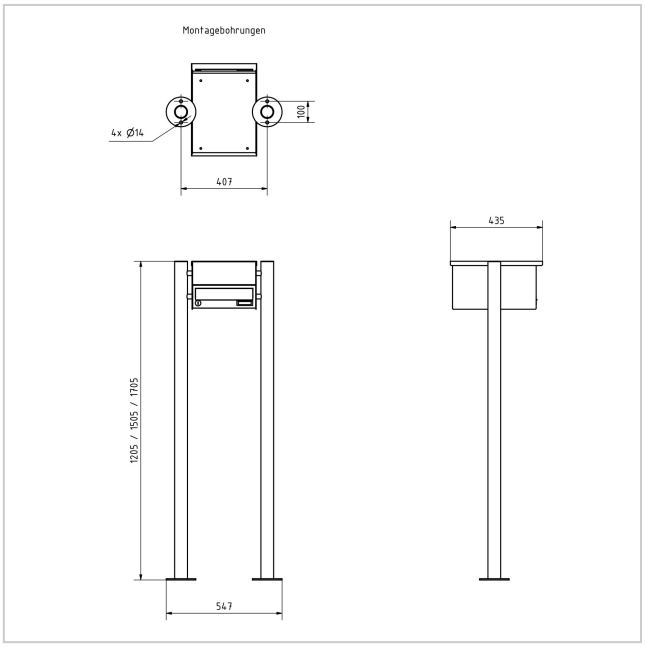

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618