Designer freestanding mailbox GOETHE ST-R with newspaper compartment - RAL colour of your choice - GIRA System 106 - Video complete kit



Product number 215-STR-1-SP-ZF-KSGI106

Product description

Designer freestanding letterbox GOETHE ST-R with newspaper compartment - RAL colour of your choice - GIRA System 106 - VIDEO complete set

High-quality manufactured freestanding letterbox with newspaper compartment and seamlessly integrated Gira System 106 in a flush-mounted design. The modern GOETHE letterbox is ideal for discerning entrance areas. The clean-lined design without a visible lock makes this letterbox particularly elegant. Three GIRA system modules are included, so the letterbox can be used immediately. The matching GIRA apartment station and the control unit to complete this letterbox are included. The modules can be exchanged later at will thanks to the simple mounting system.

The dimensions of the individual box provide a capacity of approx. 16 litres; the large aperture ensures no creased mail even with DIN C4 envelopes and magazines or after several days' absence. The innovative Push-Key lock is concealed inside the letterbox. The key is simply inserted into the existing opening (no turning required) and the door opens. The lock's positioning and the design of the retrieval door prevent your post from falling out towards you. The internal post is optimally protected from the elements by the water-drip edge. The insertion flap is equipped with high-quality pivot dampers for quiet closing, preventing annoying rattling caused by weather.

The letterbox systems of the GOETHE collection are characterised by the consistent use of stainless steel and aluminium. The result is very high durability and sustainability. The construction has been developed by our own engineers with a view to high flexibility and modularity, easy spare-part assembly and straightforward self-installation. Spare parts for all GOETHE systems are available directly in our shop.

Thanks to the design, self-installation is straightforward.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Freestanding letterbox made of stainless steel and aluminium.
- Quality manufacturing - Made in Germany by Briefkasten Manufaktur Lippe.
- Letterbox (BH 400×400 mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Innovative Push-Key lock with 2 keys.
- Letters are inserted and retrieved from the front. Insertion flap with high-quality pivot dampers for very quiet mail insertion.
- The letterbox complies with DIN/EN 13724. Aperture size (3.5 cm x 36.0 cm) for C4 landscape; large letters fit without bending.
- The retrieval door opens from top to bottom. This prevents your post from falling out towards you.
- Newspaper compartment (BH 400×200 mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice with stainless steel laser inscription "NEWSPAPER" (font ARIAL; if a name/house number is selected, it will be in your chosen font).
- Newspaper compartment opens from bottom to top.
- Function box (BH 400×200 mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Nameplate made of stainless steel, powder-coated in the chosen RAL colour. Your name and/or a bell can optionally be laser-engraved on the nameplate.
- Optionally with a laser-engraved house number (a name inscription can also be added here).
- Optimal protection from rain thanks to water-drip edges and a rain canopy made of 3 mm aluminium AlMg3 W19, powder-coated in RAL colour of your choice.
- Side cladding made of 3 mm aluminium AlMg3 W19, powder-coated in RAL colour of your choice.
- Rear panel made of 1 mm stainless steel V2A 1.4301, powder-coated in RAL colour of your choice.
- The support posts consist of 60.3 mm stainless steel V2A 1.4301, brushed, for screw mounting or for embedding in concrete.
- Incl. GIRA apartment station & control unit included, System 106 door station module, info module & camera module installed.

GIRA

Camera module Gira System 106 - 5561 000, installed without cabling

- Behind the replaceable black glass pane is a high-quality camera with high light sensitivity. Thanks to a detection angle of 100° the user is always kept informed of what is happening at their front door.

Info module Gira System 106 - 5560 920, installed

- For house numbers that should be displayed clearly and prominently.

Door station module Gira System 106 - 5565 920, installed without cabling

- Compact audio module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good intelligibility.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. required from the 3rd camera module).
- All other System 106 modules (except the audio module) are powered via the door station module.

Apartment station Gira Video AP 7 1209xx, included

- Video apartment station with a 17.78 cm (7") TFT colour display and convenient hands-free function for surface mounting or wall mounting with flush-mounted device box or cavity wall box. With the optional stand (see Accessories) also suitable for placement on furniture. A 32 GB SD memory card is included for internal image storage. Full-area glass front with touch functionality and tactile feedback.

Control unit Video REG Gira 128800, included

- Control unit for supplying the audio and video components of the Gira door communication bus.
- Supplies the polarity-protected and short-circuit-proof 2-wire bus when using video components such as colour camera and TFT colour display.
- Up to 2 door stations with colour camera and 28 apartment stations with TFT colour display can be supplied via the video control unit.
- In total up to 15 colour cameras can be controlled by the video control unit (5 video door stations and 10 TKS camera gateways), of which two door stations with colour camera can be supplied with power by the video control unit. The remaining colour cameras must each be operated with their own power supply for door communication.
- Self-resetting electronic short-circuit and overload detection for the operating voltages and the bus connection.
- Buttons for system and door-opener programming.
- LED status indicators for operation, overload, system programming and door-opener programming.
- AC 12 V output to supply a conventional door opener.
- Relay output to switch a door opener with its own power supply.
- Door opener switching time continuously adjustable from 1 to 10 s.

Important information

Camera or intercom preparation

The intercom systems must be connected by a qualified electrician. Please contact the electrician of your choice for planning, installation and commissioning.

Water protection

To achieve optimal protection of your post from water, the letterbox or letterbox system should, where possible, be located under a canopy.

The contents are only protected from water if they are fully placed into the box and the insertion flap is closed. Partially inserted mail allows moisture and dirt to enter the letterbox. This system is protected against water ingress according to DIN EN 13724. Water ingress is not a basis for complaint.

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), Brushed, RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Camera, Intercom
Functional box prepared for manufacturer	GIRA
Material	Aluminium AlMg3 W19, Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
Mounting type	Free-standing
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions


Height of single box in mm	BK 400.0 | ZF 200.0
Width of single box in mm	400,0
Capacity in litres	BK 16.0 | ZF 8.0
Height of letterbox slot in mm	35,0
Width of letter slot in mm	360,0
Height of letterbox in mm	800,0
Width of letterbox system in mm	400,0
Overall height in mm	1200,0 | 1500,0 | 1700,0
Total width in mm	568,0
Depth in mm	100.0 + 25.0 Rain roof
Weight in kg	38
Delivery condition	Delivery is assembled

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimension drawing

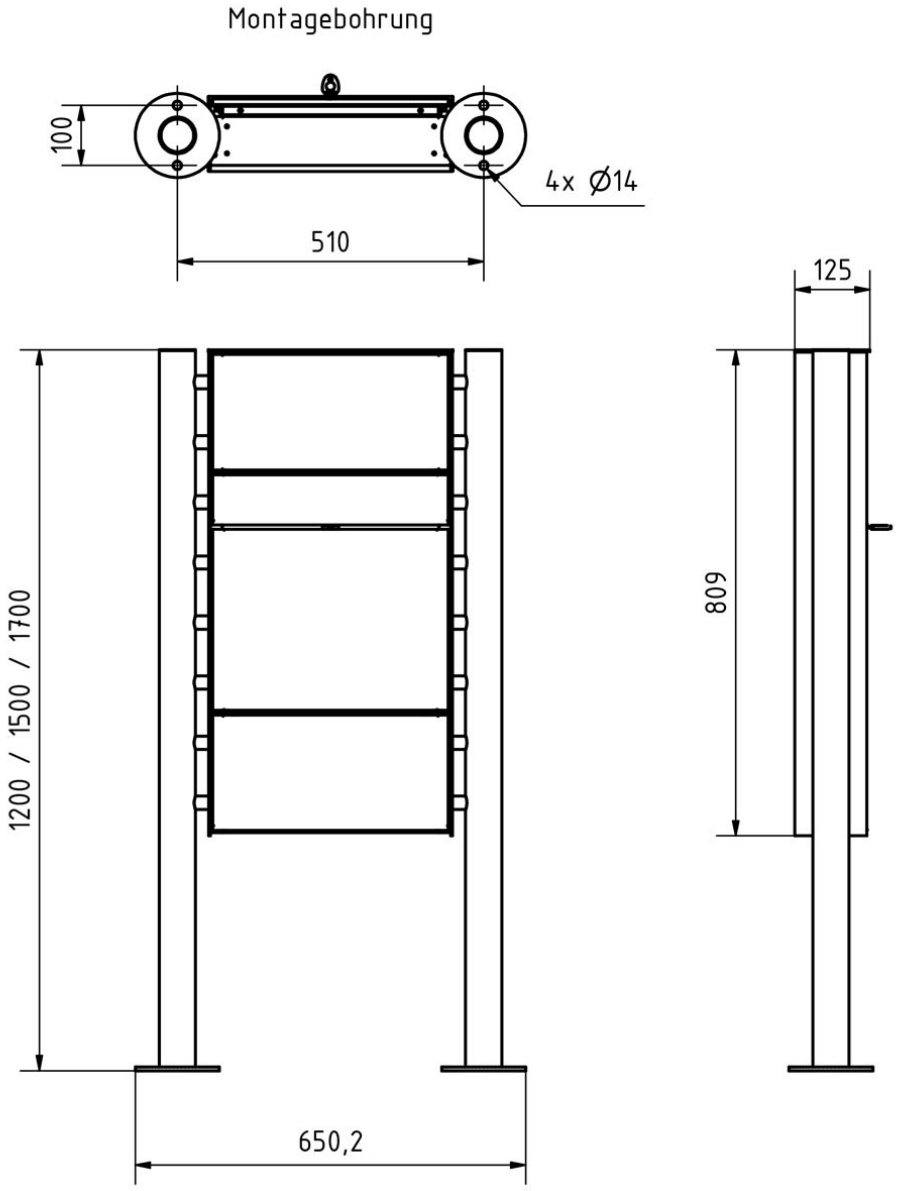



Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images

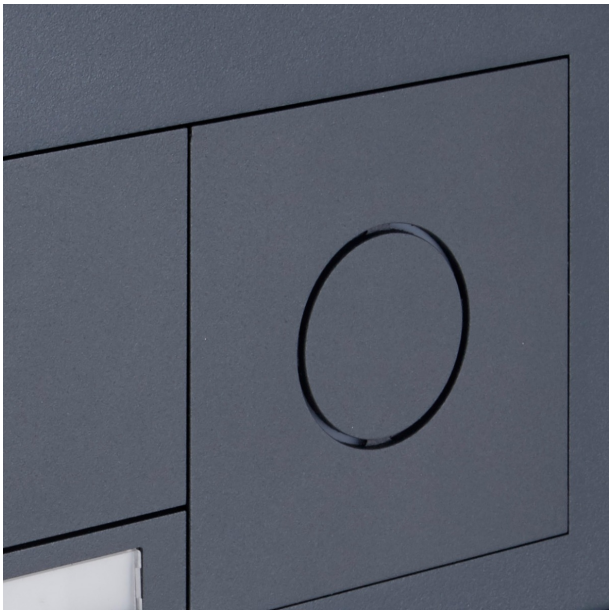

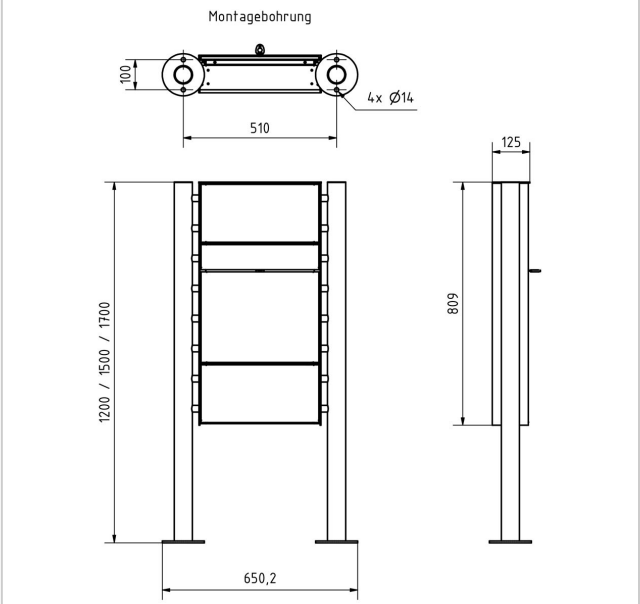





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618







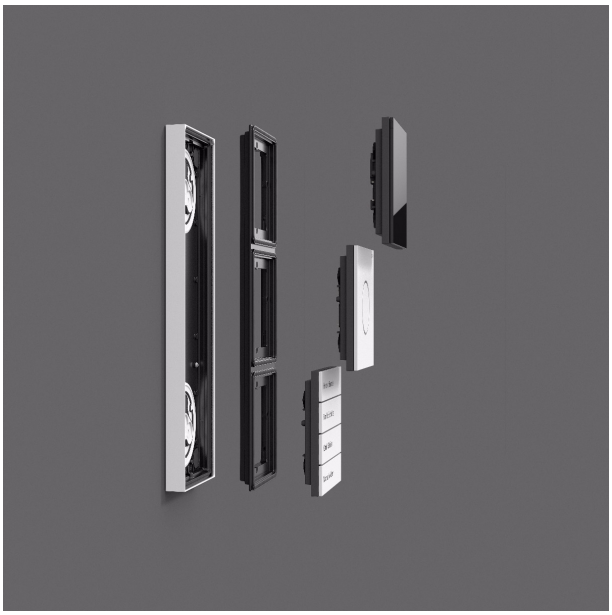

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618







Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618