Design drop-through letterbox GOETHE MDW - RAL colour of your choice - GIRA System 106 Keyless In - VIDEO complete set | 300-390mm depth | Gira System 106 Complete Video Set 2DB Fingerprint



Product number 215-MDW-1-SP-KSGI106FP-39

Product description

Design through-wall letterbox GOETHE MDW - RAL of your choice - GIRA System 106 Keyless In - VIDEO complete set

The modern GOETHE through-wall letterbox with seamlessly integrated Gira System 106 with fingerprint in a flush-mounted design is ideal for an upscale entrance area. The linear form gives this letterbox an especially elegant appearance. With a variable chute length between 300 mm and 390 mm or 390 mm and 560 mm, this letterbox can be installed in almost any masonry. Three GIRA system modules are included, so the letterbox can be used immediately. The matching GIRA indoor station and the control unit to complete this letterbox are included. The modules can be exchanged at any time afterwards via the simple retention system.

The dimensions of the individual boxes provide a capacity of approx. 24–44 litres; the large entry ensures that even C4 envelopes and magazines, or post after several days’ absence, are not creased. Thanks to the water drainage edge, the mail inside is optimally protected from the elements. The entry flap is fitted with high-quality dampers, guaranteeing quiet closing and preventing annoying rattling caused by weather effects.

The GOETHE collection letterbox systems are characterised by the consistent use of stainless steel. The result is very high durability and sustainability. The construction has been developed by our in-house engineers with a view to high flexibility and modularity, easy spare-part assembly and straightforward self-installation. Spare parts for all GOETHE systems are available directly in our shop.

Thanks to the design, self-installation is uncomplicated.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- High-quality through-wall letterbox completely made of stainless steel.
- Chute made of stainless steel 1.4016 (magnetic stainless steel), uncoated.
- Body made of stainless steel 1.4016 (magnetic stainless steel), powder-coated in RAL colour of your choice.
- Quality manufacture - Made in Germany by Briefkasten Manufaktur Lippe.
- The letterbox complies with DIN/EN 13724. Entry size (3.5 cm x 36.0 cm) for C4 landscape; large letters fit in without bending.
- Letter slot & retrieval door made of stainless steel V2A 1.4301, powder-coated in RAL colour of your choice.
- Letters are inserted and removed from the front. Entry flap with high-quality dampers for very quiet posting of mail.
- Retrieval door opens from top to bottom, so mail cannot fall out towards you.
- Function box (W x H 400 x 200 mm) made of stainless steel 1.4016 (magnetic stainless steel), powder-coated in RAL colour of your choice.
- Nameplate made of stainless steel, powder-coated in RAL colour. Your name and/or a bell will optionally be laser-engraved on the nameplate.
- Optionally available with laser-engraved house number (a name inscription can also be applied here).
- Incl. GIRA indoor station, power supply & control unit included, System 106 door station module, Keyless In fingerprint module & camera module installed.
- Installation frame made of stainless steel angle profile 25 x 58 mm, powder-coated in RAL colour.
- Variable chute length 300–390 mm or 390–560 mm. External dimensions of letter chute W 380 mm x H 180 mm.
- External dimensions front W 450 mm x H 450 mm; rear W 450 mm x H 250 mm.

GIRA

Camera module Gira System 106 - 5561 000, fitted without cabling

- Behind the removable black glass pane is a high-quality camera with high light sensitivity. With a 100° field of view, the user is always aware of what is happening at their front door.

Keyless In fingerprint module Gira System 106 - 5551 920, fitted

The GIRA fingerprint module is a professional biometric access control system based on next-generation area-scan technology. Commissioning and user management are carried out via the Gira Keyless In app.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Use as a stand-alone device with Gira TKS switching actuators or in combination with the Gira door communication system as an intercom system for multi-occupancy buildings.
- Scans the deepest layer of the skin using high frequency. High recognition rate and tamper resistance.
- Evaluation of the unique characteristic features of the living human finger.
- Up to 99 fingers can be managed by the fingerprint reader.
- Reliable recognition of fingers that have, for example, been slightly injured during gardening (only the outer skin layer has been damaged).
- Data protection through encryption procedures.
- Fast response time from placing the finger to release: up to 30 stored fingers approx. 1 s, up to 99 stored fingers approx. 3 s.
- Fingerprint area illuminated at night for orientation by white LED lighting.
- 360° finger placement possible.
- 3-colour LED status indicator for optical signalling during programming and operation.
- Master PIN number on the enclosed sealed security card, for use if the administrator fingerprint is no longer available. The device can be factory-reset with the enclosed security card.
- Acknowledgement buzzer for acoustic signalling for users or the installer.
- Acoustic warning tone in the event of unauthorised removal of the fingerprint module for tamper detection. Tamper switching via switching actuator in the door communication system.
- Inputs and outputs: plug strip connection cable for Gira door communication system.

Door station module Gira System 106 - 5565 920, fitted without cabling

- Compact audio module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good intelligibility.
- Power supply via 2-wire bus. Additional connection for central locking (ZV) (e.g. required from the 3rd camera module onward).
- All other System 106 modules (except the audio module) are powered via the door station module.

Indoor station Gira Video AP 7 1209xx, included

- Video indoor station with a 17.78 cm (7") TFT colour display and convenient hands-free function for surface-mounted installation or wall mounting with flush-mounting device box or hollow-wall box. With the optional stand (see Accessories) also suitable for placement on furniture. A 32 GB SD memory card is included for internal image storage. Full-surface glass front with touch functionality and tactile feedback.

Video control unit REG Gira 1288 00, included

- Control unit for powering the audio and video components of the Gira door communication bus.
- Supplies the polarity-protected and short-circuit-proof 2-wire bus when using video components such as colour camera and TFT colour display.
- Up to 2 door stations with colour camera and 28 indoor stations with TFT colour display can be supplied via the Video control unit.
- In total, up to 15 colour cameras can be controlled by the Video control unit (5 video door stations and 10 TKS camera gateways), of which two door stations with colour camera can be powered by the Video control unit. The additional colour cameras must each be operated with their own power supply for door communication.
- Self-resetting electronic short-circuit and overload detection of the supply voltages and the bus connection.
- Buttons for system and door opener programming.
- LED status indicators for operation, overload, system programming and door opener programming.
- AC 12 V output for powering a standard door opener.
- Relay output for switching a door opener with its own power supply.
- Door opener switching time continuously adjustable from 1 to 10 s.

Power supply DC 24 V 300 mA Gira 1296 00, included

- DC 24 V power supply for feeding door communication components.
- Supplies the Keyless In module.

Important information

Preparation for camera or intercom

The intercom systems must be connected by an electrician. For planning, installation and commissioning, please contact the electrician of your choice.

Water protection

To achieve optimal water protection for your post, the letterbox or letterbox system should, where possible, be located under a canopy.

Mail is only protected from water if it is placed completely inside the box and the entry flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the letterbox. This system is protected against water ingress according to DIN EN 13724. Water ingress does not constitute grounds for a complaint.

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Camera, Intercom, Fingerprint
Functional box prepared for manufacturer	GIRA
Material	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Wall throw-through
Removal of mail	On the back

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions

Height of single box in mm	200,0
Width of single box in mm	400,0
Capacity in litres	24,0 - 32,0 | 32,0 - 44,0
Height of letterbox slot in mm	35,0
Width of letter slot in mm	360,0
Total width in mm	450,0
Depth in mm	BK 300.0 - 390.0 | BK 390.0 - 560.0 | FK 100.0
Weight in kg	21
Delivery condition	Supplied partially disassembled

Dimension drawing

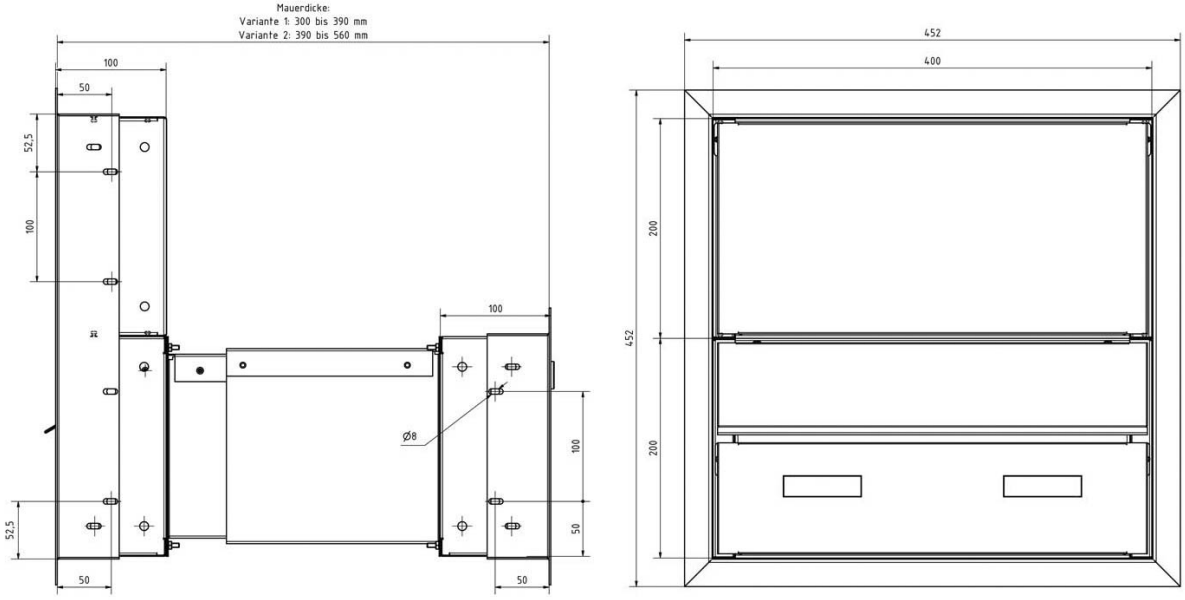


More images







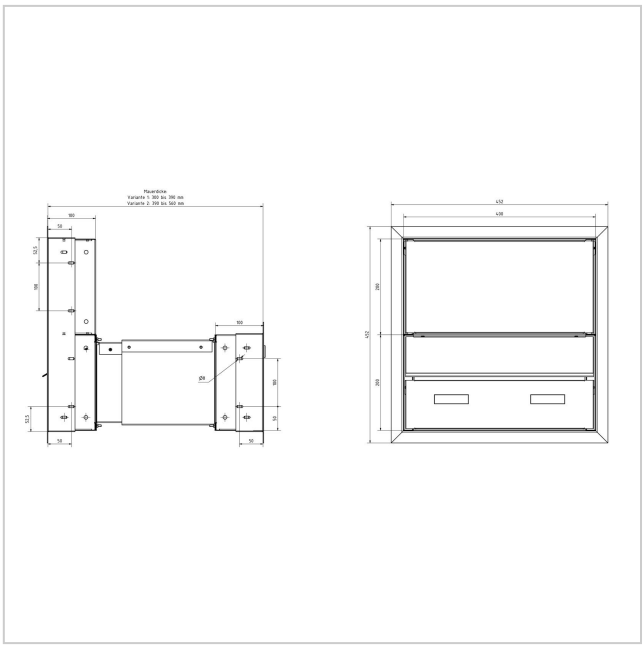

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618











Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

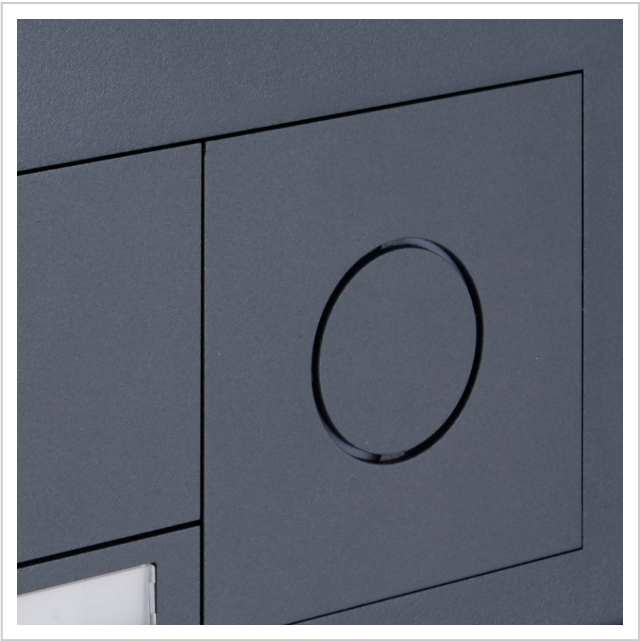

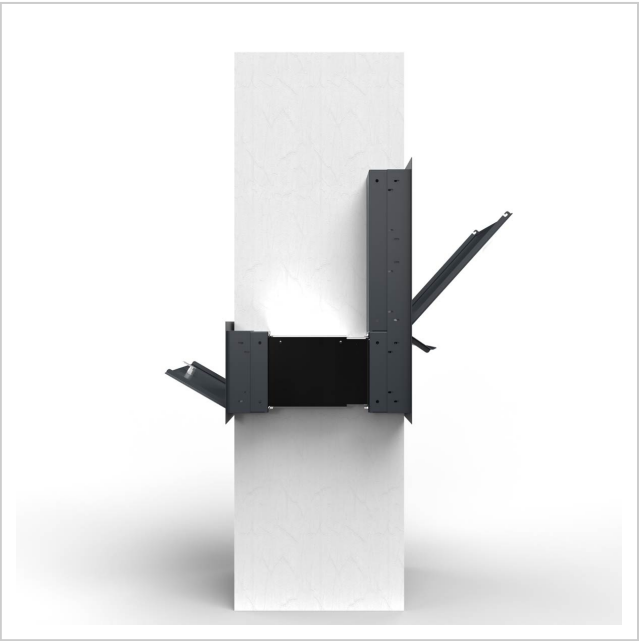

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618