Designer surface-mounted mailbox GOETHE AP - RAL colour of your choice - prepared for LOXONE Intercom 2x1 | without newspaper compartment | 100mm depth | Prepared for dual LOXONE Intercom + Code Touch



Product number 215-AP-1-SP-LOX2

Product description

Design surface-mounted mailbox GOETHE® AP with newspaper compartment - RAL colour of your choice - LOXONE Intercom prepared

High-quality surface-mounted mailbox manufactured in a flush-fitting design. The modern mailbox GOETHE® is ideal for a discerning entrance area. The straight-lined shape without a visible lock gives this mailbox an especially elegant appearance. The LOXONE Intercom can be seamlessly integrated into the flush-fitting design and replaced at any time. The preparation is provided for 1 piece LOXONE Intercom (incl. cut-out for sound output) or 1 piece LOXONE Intercom (incl. cut-out for sound output) + 1 piece LOXONE NFC Code Touch/Touch Pure.

The dimensions of the single box allow a capacity of approx. 16 litres; the large insertion opening guarantees that even DIN-C4 envelopes and magazines, or post accumulated during several days of absence, will not be creased. The innovative push-key lock is concealed invisibly inside the mailbox. The key is simply inserted into the existing opening (no turning needed) and the door opens. The position of the lock is designed so that the collection door prevents your post from falling towards you. Thanks to the water-drip edge, the mail inside is optimally protected from the weather. The insertion flap is fitted with high-quality axle dampers, ensuring very quiet closing and preventing annoying rattling caused by weather conditions.

The surface-mounted mailbox systems of the GOETHE® collection are characterised by the consistent use of stainless steel and aluminium. The result is very high durability and sustainability. The construction has been developed by our own engineers with a view to high flexibility and modularity, easy replacement part assembly and straightforward self-installation. Spare parts for all GOETHE® systems are available directly in our shop.

Thanks to the design, self-installation is uncomplicated.

Protected utility model according to DPMA file reference DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- High-quality surface-mounted mailbox made of stainless steel and aluminium.
- Quality manufacture - Made in Germany by Briefkasten Manufaktur Lippe.
- Mailbox (BH 400x400mm) made of stainless steel 1.4016 (corrosion-resistant magnetic stainless steel), powder-coated in RAL colour of your choice.
- Innovative push-key lock with 2 keys.
- Letters are inserted and retrieved from the front. Insertion flap with high-quality axle dampers for very quiet insertion of mail.
- The mailbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 landscape; large letters fit in without being bent.
- Collection door opens from top to bottom, so the mail cannot fall out towards you.
- Optional name inscription approx. 15–20 mm high.
- Optional house number inscription approx. 70–80 mm high.
- Function box (BH 400x200mm) made of stainless steel 1.4016 (corrosion-resistant magnetic stainless steel), powder-coated in RAL colour of your choice.
- Optimal protection from rain thanks to rain-drip edges and a rain canopy made of 3 mm aluminium AlMg3 W19, powder-coated in RAL colour of your choice.
- Side cladding made of 3 mm aluminium AlMg3 W19, powder-coated in RAL colour of your choice.
- Includes mounting rail for wall installation.
- **WITHOUT LOXONE Intercom/System components!**

Important information

Camera or intercom preparation

We always recommend that electrical installation be carried out by a qualified electrician.

We offer preparation for intercom units from various manufacturers for our mailboxes. The preparation does not include end devices; it comprises the provision of mounting brackets, drillings & cut-outs so that you can mount your end device without difficulty.

Water protection

To achieve optimal protection of your mail from water, the mailbox or mailbox system should, where possible, be located under a canopy.

Mail is only protected from water if it is placed completely inside the box and the insertion flap is closed. Partially inserted mail allows moisture and dirt to enter the mailbox. This system is protected against ingress of water according to DIN EN 13724. Water ingress is not a valid reason for a complaint.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Functions	Camera, Intercom, Fingerprint, Keypad
Functional box prepared for manufacturer	LOXONE
Material	Aluminium AlMg3 W19, Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Surface-mounted

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions


Height of single box in mm	BK 400.0 | FK 200.0
Width of single box in mm	400,0
Capacity in litres	BK 16.0
Height of letterbox slot in mm	35,0
Width of letter slot in mm	360,0
Height of letterbox in mm	600,0
Width of letterbox system in mm	400,0
Total width in mm	408,0
Depth in mm	100.0 + 25.0 Rain roof
Weight in kg	20
Delivery condition	Delivery is assembled

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimension drawing

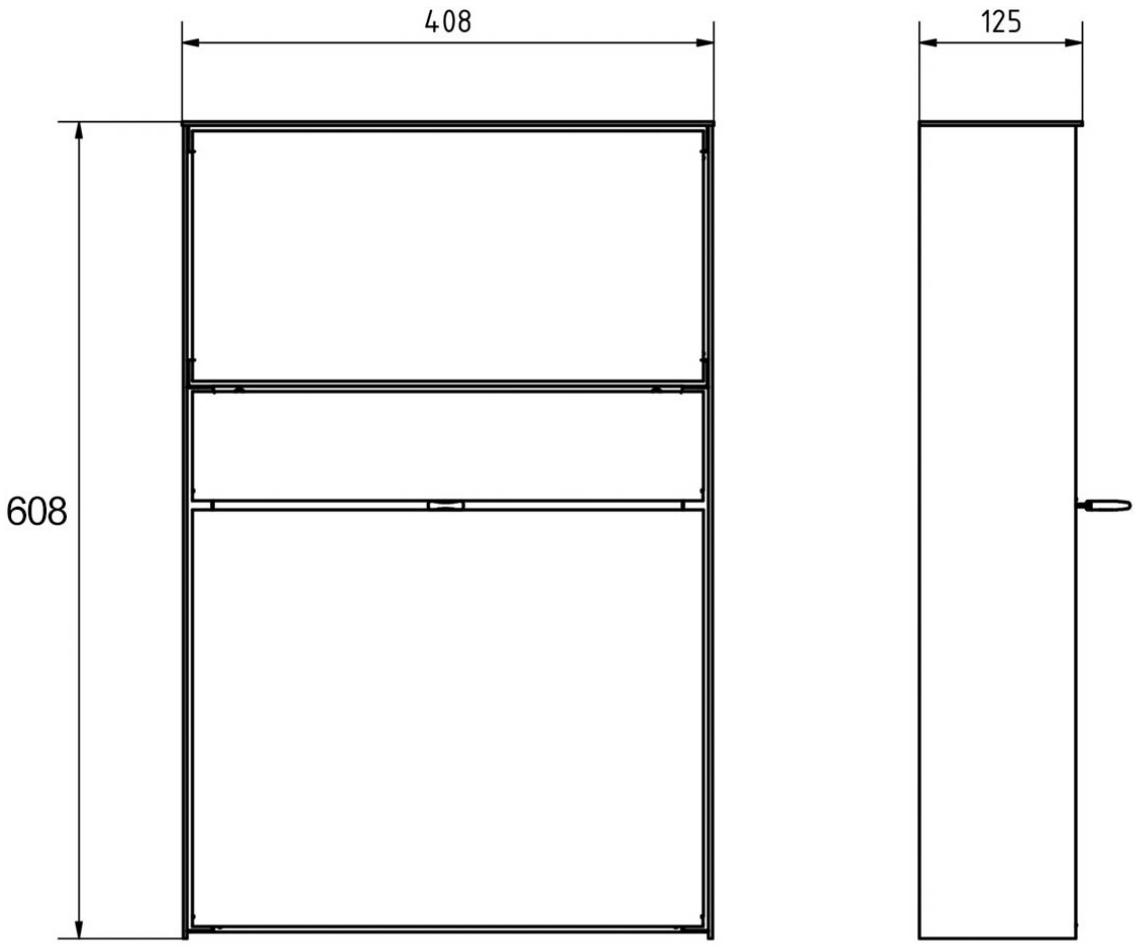

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images










Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

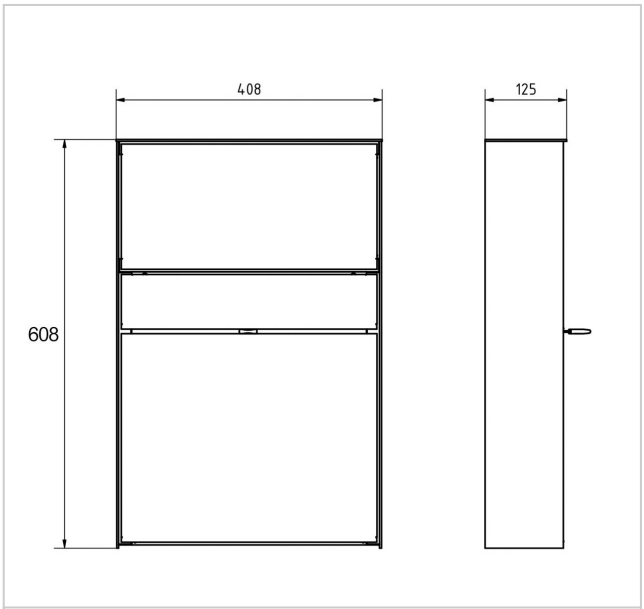
408
125
608




Push-Key-Schloss
Nur noch stecken!