Designer surface-mounted mailbox GOETHE AP with newspaper compartment - RAL colour of your choice - GIRA System 106 - VIDEO complete set | with newspaper compartment | 100mm depth | Gira System 106 Complete Video Set 2DB



Product number 215-AP-1-SP-ZF-KSGI106

Product description

Design surface-mounted mailbox GOETHE® AP with newspaper compartment - RAL colour of choice - GIRA System 106 - VIDEO complete set

High-quality surface-mounted mailbox with newspaper compartment and seamlessly integrated Gira System 106 in a flush design. The modern mailbox GOETHE® is ideal for an upscale entrance area. The clean-lined design without a visible lock gives this mailbox a particularly elegant appearance. 3 GIRA System modules are included, so the mailbox can be used immediately. The matching GIRA apartment station and the control unit to complete this mailbox are included. The modules can be exchanged at any time afterwards thanks to the simple retention system.

The dimensions of the single box allow a capacity of approx. 16 litres; the large aperture ensures that even DIN-C4 envelopes and magazines — or post after several days' absence — are not creased. The innovative push-key lock is concealed invisibly inside the mailbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the lock arrangement, this mailbox is designed so that the collection door prevents your post from falling out towards you. The internal post is optimally protected from the weather by the water runoff edge. The inlet flap is fitted with high-quality hinge dampers, ensuring quiet closing and preventing rattling caused by weather influences.

The surface-mounted mailbox systems of the GOETHE® collection are characterised by the consistent use of stainless steel and aluminium. The result is very high durability and sustainability. The construction has been developed by our own engineers with a focus on high flexibility/modularity, simple spare part installation and straightforward self-installation. Spare parts for all GOETHE® systems are available directly in our shop.

Thanks to the design, self-installation is uncomplicated.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- High-quality surface-mounted mailbox made of stainless steel and aluminium.
- Quality manufacturing - Made in Germany by Briefkasten Manufaktur Lippe.
- Mailbox (BH 400x400mm) made of stainless steel 1.4016 (corrosion-resistant magnetic stainless steel), powder-coated in RAL colour of your choice.
- Innovative push-key lock with 2 keys.
- Letter insertion and retrieval are from the front. Inlet flap with high-quality hinge dampers for very quiet insertion of post.
- The mailbox complies with DIN/EN 13724. Inlet size (3.5 cm x 36.0 cm) for C4 landscape; large envelopes fit without folding.
- Collection door opens from top to bottom, preventing mail from falling out towards you.
- Newspaper compartment (BH 400x200mm) made of stainless steel 1.4016 (corrosion-resistant magnetic stainless steel), powder-coated in RAL colour of your choice with stainless steel laser engraving "ZEITUNG" (font ARIAL; if name/house number, then in your chosen font).
- Newspaper compartment opens from bottom to top.
- Function box (BH 400x200mm) made of stainless steel 1.4016 (corrosion-resistant magnetic stainless steel), powder-coated in RAL colour of your choice.
- Nameplate made of stainless steel, powder-coated in the selected RAL colour. Your name and/or a bell can be laser-engraved on the nameplate.
- Optionally with laser-engraved house number (a name inscription can also be applied here).
- Optimal weather protection through rain runoff edges and a rain canopy made from 3 mm aluminium AlMg3 W19, powder-coated in RAL colour of your choice.
- Side cladding made from 3 mm aluminium AlMg3 W19, powder-coated in RAL colour of your choice.
- Incl. mounting rail for wall installation.
- Incl. GIRA apartment station & control unit included; System 106 door station module, info module & camera module installed.

GIRA

Camera module Gira System 106 - 5561 000, installed without wiring

- Behind the interchangeable black glass pane is a high-quality camera with high light sensitivity. Thanks to a detection angle of 100°, the user is always informed about what is happening at their front door.

Info module Gira System 106 - 5560 920, installed

- For house numbers that should be displayed prominently.

Door station module Gira System 106 - 5565 920, installed without wiring

- Compact voice module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good intelligibility.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. required from the 3rd camera module).
- All other System 106 modules (except the voice module) are powered via the door station module.

Apartment station Gira Video AP 7 1209xx, included

- Video apartment station with a 17.78 cm (7") TFT colour display and convenient hands-free function for surface mounting or wall mounting with a flush-mount device box or cavity wall box. With the optional stand (see Accessories) it is also suitable for placement on furniture. A 32 GB SD memory card is included for internal image storage. Full-surface glass front with touch functionality and tactile feedback.

Control unit Video REG Gira 128800, included

- Control unit for supplying the audio and video components of the Gira door communication bus.
- Supplies the polarity-protected and short-circuit-proof 2-wire bus when using video components such as colour camera, TFT colour display.
- Up to 2 door stations with colour camera and 28 apartment stations with TFT colour display can be supplied via the video control unit.
- In total, up to 15 colour cameras can be controlled by the video control unit (5 video door stations and 10 TKS camera gateways), of which two door stations with colour camera can be supplied with power by the video control unit. The remaining colour cameras must each be operated with their own power supply for door communication.
- Self-resetting electronic short-circuit and overload detection of the operating voltages and the bus connection.
- Buttons for system and door-opener programming.
- LED status indicators for operation, overload, system programming and door-opener programming.
- AC 12 V output for powering a standard door opener.
- Relay output for switching a door opener with its own power supply.
- Door opener switching time continuously adjustable from 1 to 10 s.

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrical installer. For planning, installation and commissioning, please contact a qualified electrician of your choice.

Water protection

To achieve optimal water protection for your post, the mailbox or mailbox system should, where possible, be located under a canopy.

Mail is only protected from water when it is placed completely inside the box and the inlet flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the mailbox. This system is protected against ingress of water in accordance with DIN EN 13724. Water ingress is not grounds for complaint.

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Newspaper compartment, Camera, Intercom
Functional box prepared for manufacturer	GIRA
Material	Aluminium AlMg3 W19, Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Surface-mounted

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions


Height of single box in mm	BK 400.0 | ZF 200.0
Width of single box in mm	400.0
Capacity in litres	BK 16.0 | ZF 8.0
Height of letterbox slot in mm	35.0
Width of letter slot in mm	360.0
Height of letterbox in mm	800.0
Width of letterbox system in mm	400.0
Total width in mm	408.0
Depth in mm	100.0 + 25.0 rain canopy
Weight in kg	24
Delivery condition	Delivered assembled

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimension drawing

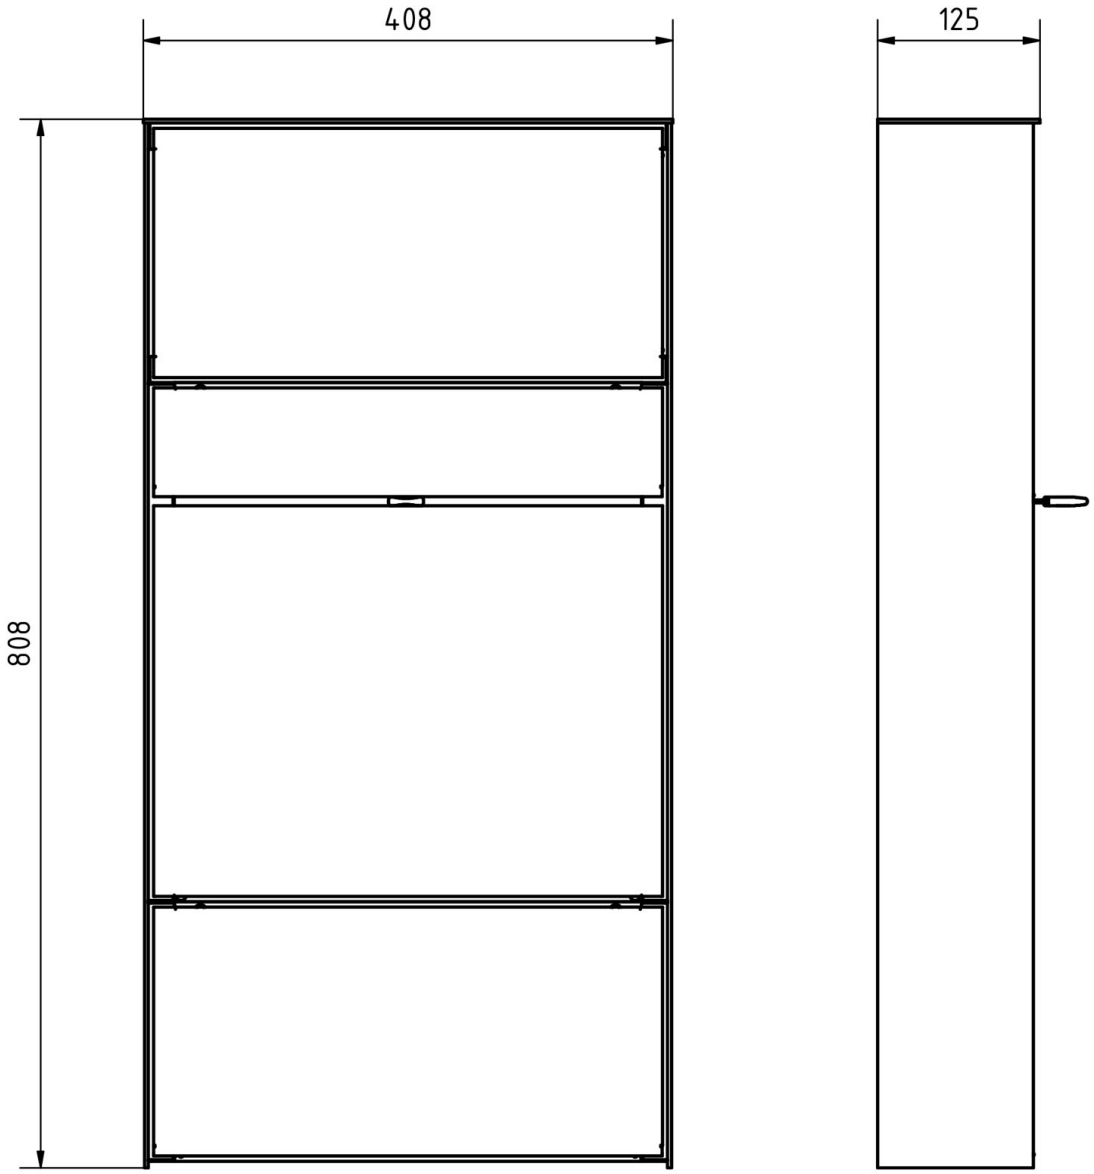

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images









Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618








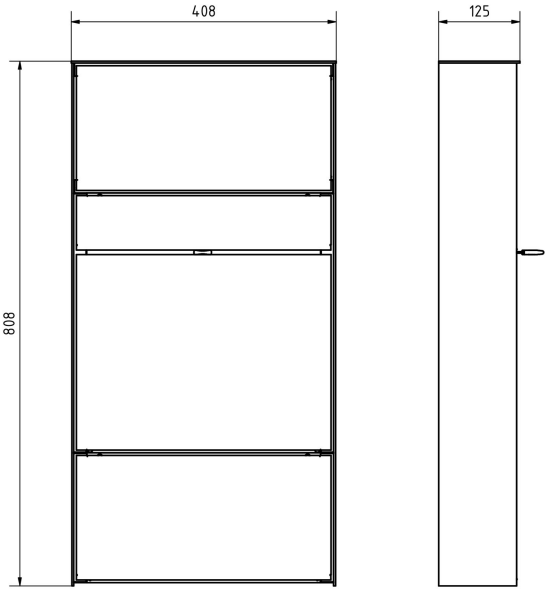

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

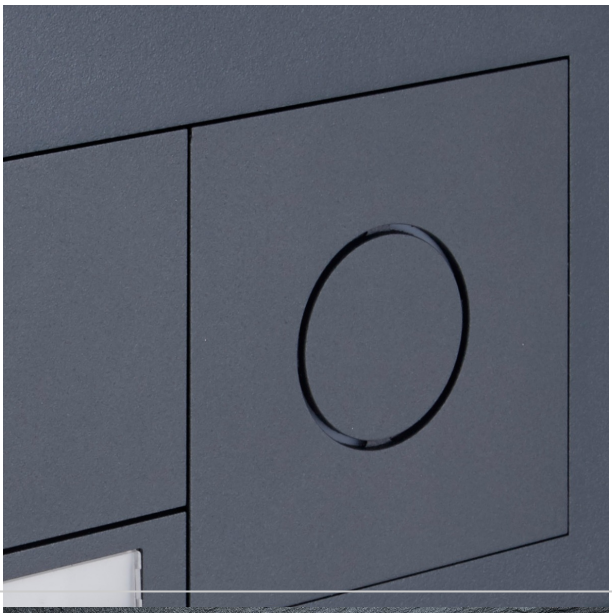





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618