
Gira Video IP indoor station with Wi ?Fi in white | White

Product number 123712

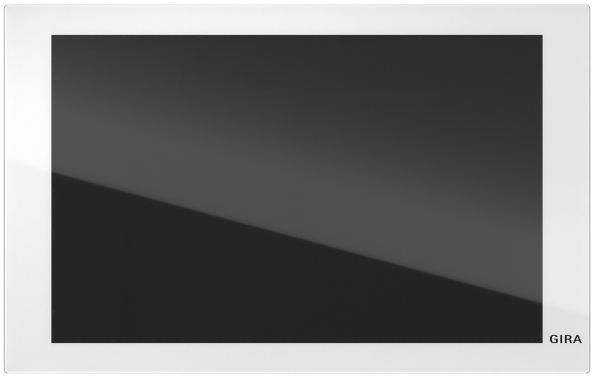

Product description

Video IP apartment station with WLAN in white

The Gira Video IP apartment station with WLAN is designed for internal communication within the Gira door communication IP system. It combines a 7-inch HD colour display with modern touch operation and is suitable for high-quality door communication solutions in residential and commercial buildings. The station is supplied as a pre-assembled unit and is intended for wall mounting in a double device box.

The large-format display with a glass front enables comfortable operation and, thanks to a wide viewing angle, good legibility from various perspectives. The integrated hands-free function supports comfortable day-to-day communication. By combining a SIP client, WLAN interface and network connection, the apartment station can be flexibly integrated into modern IP-based door communication systems.

The apartment station is designed for Gira door communication IP and for use with the TKS-IP-Gateway. In addition, a potential-free input is available for connecting a floor call button. This makes the device suitable for applications where, in addition to video door communication, a clean integration into existing building structures is required.

Power is supplied via Power over Ethernet (PoE). Alternatively, a 2-pole connection for the power supply is also provided. With support for WLAN according to IEEE 802.11b/g/n/ac in the 2.4 GHz and 5 GHz bands, the apartment station is engineered for stable integration into modern network infrastructures.

Features

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Apartment station for Gira door communication IP in white
- Suitable for use with TKS-IP-Gateway
- Pre-assembled unit with 7-inch HD colour display
- Comfortable hands-free function
- Full-surface glass front with touch functionality
- Wide viewing angle from various directions
- Potential-free input for connection of a floor call button
- Wall mounting in a double device box
- WLAN interface
- Integrated SIP client

Technical data

Power supply PoE	PoE power class 0, DC 48 V, IEEE 802.3af
Maximum power consumption	8 W
Typical power consumption	4 W
Network connection	RJ45
Power supply connection	2?pole terminal
Floor call button connection	2?pole terminal
Display	17.78 cm (7?)
Number of colours	16.7 million
Resolution	800 x 1280 px, 216 ppi
WLAN standard	IEEE 802.11b/g/n/ac, 2.4 GHz + 5 GHz
Ambient temperature	+5 °C to +40 °C
Protection rating	IP3XD

Product properties

Connection technology	LAN

Dimensions

Width in mm	181
Height in mm	114
Total width in mm	181
Depth in mm	15 (overall height)
Weight in kg	1

More images

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618