4-compartment stainless steel surface-mounted mailbox BASIC Plus 382X AP with side-mounted doorbell box | Right | 150mm depth | with 4 mailboxes (2x2) | Stainless steel, brushed



Product number 382XA-VA-4W-SP-150-R

Product description

4-unit stainless steel surface-mounted mailbox BASIC Plus 382X AP with side bell box

German quality manufacture "Made in Germany" by Briefkasten Manufaktur. The complete 4-unit surface-mounted mailbox is made of weather-resistant stainless steel V2A, brushed. A rain drip edge for optimal water protection, a double-folded mail slot flap with rubber buffer, the solid interchangeable nameplate, a practical mail retention bar and the robust lock characterise this stainless steel mailbox.

The mailbox systems of the BASIC Plus collection are characterised by the consistent use of stainless steel V2A. The result is very high durability and sustainability. The construction has been developed by our own engineers with a focus on high flexibility and modularity, easy spare-part assembly and straightforward self-installation. Spare parts for all BASIC Plus systems are readily available.

Thanks to the design, self-installation is uncomplicated. The mailbox system is prepared for straightforward complete installation, so time-consuming wall mounting of individual boxes is not necessary. 4-unit surface-mounted mailbox made of high-quality, weather-resistant stainless steel V2A 1.4301, brushed.

Advantages at a glance

Close-fitting stainless steel cladding with rain hood

Side cladding and rain hood are included with this version and are made of stainless steel V2A, brushed. The close-fitting design forms a closed, structurally matched unit with the mailbox system.

Generous letter slot

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

The mail slot measures 35 × 325 mm and is designed for DIN C4 landscape. The mailbox design complies with DIN EN 13724.

Quiet posting and comfortable retrieval

The integrated flap damping with rubber buffer reduces impact noise during posting. The mail retention bar holds items back during retrieval.

Integrated bell and intercom area

Bell box made of stainless steel V2A 1.4301, brushed. The stainless steel bell push button Type 4 is used. Optionally prepared with a speech grille for the installation of standard intercom systems or flush-fit speakers. (Intercom system/flush-fit speaker not included). An option with the Comelit Ultra video complete set is also available.

Quality manufacture and thoughtful design

The unit is manufactured at Briefkasten Manufaktur in Germany. The design is intended for straightforward self-installation.

Equipment and product details

Mailbox system

Number of mailboxes 4 individually usable mail compartments
Arrangement 2 × 2
Depth 150 mm
Mailbox material Stainless steel V2A 1.4301
Mailbox finish Brushed
Bell/intercom section Bell box made of stainless steel V2A 1.4301, brushed

Mail and operation

Mail slot 35 × 325 mm, suitable for DIN C4 landscape
Standard DIN EN 13724
Mail slot flap Noise-damped by rubber buffer
Keys 2 keys with key number for each mailbox
Nameplate Interchangeable nameplate beneath the mail slot
Mail retention bar Integrated in each mailbox

Mounting and equipment

Type of mounting Surface-mounted
Rain drip edge Integrated into the construction
Rain hood Made of stainless steel V2A, brushed
Side cladding Made of stainless steel V2A, brushed
Mounting material For wall mounting incl. mounting rail and fixings (screws + wall plugs)
Manufacture Made in Germany by Briefkasten Manufaktur Lippe

Note on weather protection

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Mail is best protected against moisture and soiling when fully inserted and with the mail slot flap closed. Protruding items may prevent the flap from closing fully.

Note on wall mounting

Before installation, check the load-bearing capacity and condition of the wall. The fastening must be matched to the weight of the unit and the existing wall construction.

Product properties

Series	BASIC
Number of bell push buttons	4 buttons
Functions	Light button, Intercom
Functional box prepared for manufacturer	GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, Comelit
Number of boxes	with 4 letterboxes
Name labelling	Nameplate
Material	Stainless steel V2A 1.4301
Removal of mail	On the front
Surface/colour	Brushed
Boxes by volume	Large > 16 litres
Mounting type	Surface-mounted

Dimensions

Height of single box in mm	330.0
Width of single box in mm	355.0
Capacity in litres	12.0 | 17.0
Height of letterbox slot in mm	35.0
Width of letter slot in mm	325.0
Height of letterbox in mm	660.0
Width of letterbox system in mm	880.0
Total width in mm	880.0
Depth in mm	100.0 | 150.0
Weight in kg	12

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images










Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618





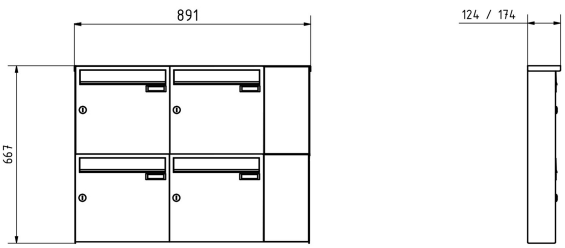



Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618



Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618