6-unit stainless steel surface-mounted mailbox Design BASIC Plus 382XA AP with bell box - RAL colour of your choice | 150mm depth | ? Colour of your choice | with 6 letterboxes (2x3) | Centre



Product number 382XA-6-SP-150-M

Product description

6-unit stainless-steel surface-mounted mailbox Design BASIC Plus 382XA AP with bell box – RAL colour of choice

High-quality surface-mounted mailbox for 6 households made in Germany by Briefkasten Manufaktur. The mailbox is made entirely of stainless steel V2A, powder-coated in a RAL colour. The very high-quality workmanship and the well thought-out concept make this mailbox one of our top sellers. A drip edge for optimal water protection, a continuous rubber lip for quiet insertion, the solid interchangeable nameplate, a practical mail retention bar and a robust lock characterise this surface-mounted mailbox.

The mailbox systems of the BASIC Plus collection are characterised by the consistent use of stainless steel V2A. The result is very high durability and sustainability. The construction has been developed by our own engineers with a view to high flexibility and modularity, simple spare-part replacement and straightforward self-installation. Spare parts are directly available for all BASIC Plus systems.

Thanks to the design, self-installation is straightforward. The mailbox system is prepared for uncomplicated complete installation; there is no need for complex wall mounting of individual boxes. 6-unit surface-mounted mailbox made of stainless steel V2A, powder-coated in a RAL colour of your choice.

The advantages at a glance

Stainless-steel side panel with rain hood

Side panel and rain hood are made of stainless steel V2A, powder-coated in a RAL colour of your choice and complement the system as a constructively coordinated weather protection.

Generous mail slot

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

The insertion opening measures 35 × 325 mm and is designed for DIN C4 landscape. The mailbox design complies with DIN EN 13724.

Quiet insertion and comfortable removal

The integrated flap damping with rubber seal reduces impact noise during insertion. The mail retention bar holds items back during removal.

Integrated bell and intercom area

Bell/intercom section made of stainless steel V2A, powder-coated in RAL colour. The stainless-steel bell button Type 4 is used as the bell push. Optionally prepared with a speaker grille for the installation of commercially available audio intercom systems or flush-mounted speakers. (Audio intercom system/flush-mounted speaker not included). An optional version with the Comelit Ultra video complete set is also available.

Quality manufacturing and considered construction

The system is manufactured at Briefkasten Manufaktur in Germany. The construction is designed for straightforward self-installation.

Equipment and product details

Mailbox system

Number of mailboxes 6 separately usable mail compartments
Layout 2 × 3
Depth 150 mm
Mailbox material Stainless steel V2A
Mailbox finish Powder-coated in a RAL colour of your choice
Bell/intercom section Bell/intercom section made of stainless steel V2A, powder-coated in RAL colour

Mail and operation

Mail slot 35 × 325 mm, suitable for DIN C4 landscape
Standard DIN EN 13724
Mail flap Noise-dampened by rubber seal
Keys 2 keys with key number per mailbox
Nameplate Interchangeable nameplate beneath the mail flap
Mail retention bar Integrated for each mailbox

Mounting and equipment

Mounting type Surface-mounted
Drip edge Integrated into the construction
Rain hood Made of stainless steel V2A, powder-coated in a RAL colour of your choice
Side panel Made of stainless steel V2A, powder-coated in a RAL colour of your choice
Mounting material For wall mounting incl. mounting rail and fastening material (screws + plugs)
Manufacturing Made in Germany by Briefkasten Manufaktur Lippe

Note on weather protection

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Mail is best protected from moisture and soiling when fully inserted and the mail flap is closed. Protruding items may prevent the flap from closing completely.

Note on wall mounting

Before installation, the load-bearing capacity and condition of the wall must be checked. Fixings must be matched to the weight of the system and the existing wall structure.

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	BASIC
Number of bell push buttons	6 buttons
Functions	Light button, Intercom
Functional box prepared for manufacturer	GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, Comelit
Number of boxes	with 6 letterboxes
Name labelling	Nameplate
Material	Stainless steel V2A 1.4301
Removal of mail	On the front
Boxes by volume	Large > 16 litres
Mounting type	Surface-mounted

Dimensions

Height of single box in mm	330.0
Width of single box in mm	355.0
Capacity in litres	12.0 | 17.0
Height of letterbox slot in mm	35.0
Width of letter slot in mm	325.0
Height of letterbox in mm	1090.0
Width of letterbox system in mm	710.0
Total width in mm	710.0
Depth in mm	100.0 | 150.0
Weight in kg	24

More images









Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618



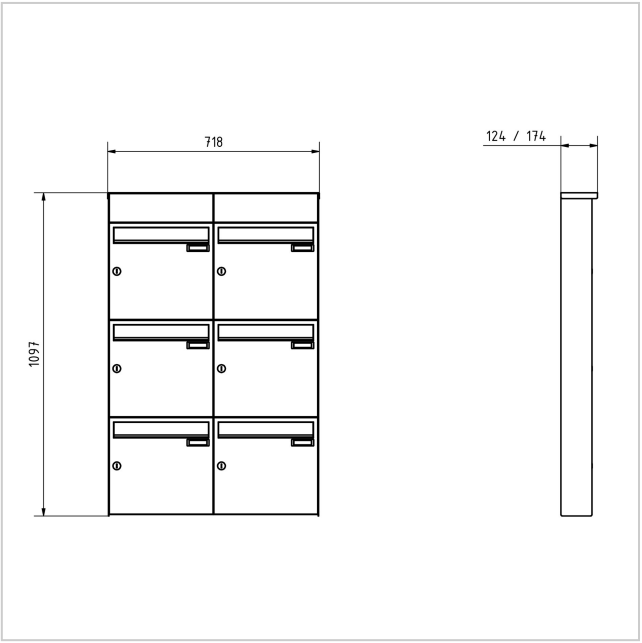





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618