Designer recessed letterbox GOETHE UP - RAL colour of choice - GIRA System 106 - Door intercom - AUDIO complete set | without newspaper compartment | 100mm depth | Gira System 106 complete set Audio 2DB



Product number 215-UP-1-SP-KSAGI106

Product description

Design flush-mounted mailbox GOETHE UP - RAL colour of choice - GIRA System 106 - Intercom - Audio complete set

High-quality manufactured flush-mounted mailbox with seamlessly integrated GIRA System 106 in a flush design. The modern GOETHE mailbox is ideal for an upscale entrance area. Its clean, linear shape without a visible lock gives this mailbox an especially elegant appearance. Three GIRA System modules are included, so the mailbox can be used immediately. The matching GIRA indoor station and the control unit to complete this mailbox are included. The modules can be exchanged later as required via the simple mounting system.

The dimensions of the single box provide a capacity of approx. 16 litres; the large insertion ensures that C4 envelopes and magazines — or post accumulated after several days away — are not creased. The innovative push-key lock is concealed invisibly inside the mailbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the arrangement of the lock, this mailbox is designed so that the retrieval door prevents the mail from falling out towards you. Thanks to the water-drip edge, the mail stored inside is optimally protected from the weather. The drop flap is fitted with high-quality hinge dampers, ensuring quiet closing and preventing annoying rattling from weather influences.

The mailbox systems of the GOETHE collection are characterised by the consistent use of stainless steel. The result is very high longevity and sustainability. The construction has been developed by our own engineers with a view to high flexibility and modularity, easy spare-part installation and straightforward self-installation. Spare parts for all GOETHE systems are available directly from our shop.

Thanks to the construction method, self-installation is uncomplicated.

Protected utility model under DPMA file number DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Flush-mounted mailbox completely made of stainless steel.
- Quality manufacture - Made in Germany by Briefkasten Manufaktur Lippe.
- Mailbox (BH 400x400mm) made from stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of choice.
- Innovative push-key lock with 2 keys.
- Letter insertion and retrieval take place from the front. Insertion flap with high-quality hinge dampers for very quiet mail insertion.
- The mailbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 landscape, so large letters fit without bending.
- The retrieval door opens from top to bottom. This prevents the mail from falling out towards you.
- Function box (BH 400x200mm) made from stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of choice.
- Doorbell nameplate made of stainless steel, powder-coated to RAL colour. For better recognisability a bell is laser-engraved on the nameplate.
- Optionally with name engraving, laser-etched (a house number can also be entered here).
- Optionally with house number, laser-etched (a name can also be entered here).
- Plaster cover frame made from 2 mm stainless steel angle profile 25 x 58 mm, powder-coated in RAL colour.
- Includes GIRA indoor station & control unit supplied; System 106 door-station module & info or blank module installed.

GIRA

Info module Gira System 106 - 5560 920, installed

- For house numbers that should be displayed prominently.

Door-station module Gira System 106 - 5565 920, installed without wiring

- Compact audio module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof speaker ensure good intelligibility.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. required from the 3rd camera module).
- All other System 106 modules (except the audio module) are powered via the door-station module.

Surface-mounted indoor station Gira 1250XX, supplied

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Completely pre-assembled surface-mounted indoor station for quick and tidy installation.
- Design variety through integration into the switch range, resulting in a uniform appearance of door communication and electrical installation.
- Mounting both with and without cover frame possible.
- Easy installation via plug-in screw terminals on the mounting plate. Contacting to the indoor station occurs when the indoor station is fitted onto the mounting plate.
- Simple removal of the indoor station during renovation work.
- Mounting holes for installation.
- Signal transmission and power supply of the indoor station via a polarity-proof and short-circuit-proof 2-wire bus.
- Parallel connection of up to three indoor stations possible (when powered via the 2-wire bus).
- One-person commissioning through a simple start-up procedure.
- Ringtone differentiation between door call, internal call and floor call.
- Selection of five different ringtones, which can be assigned individually to the call buttons.
- Hands-free function (voice-operated two-way communication with echo and background noise suppression).
- Speech prioritisation function for loud ambient noise during communication.
- Privacy lock.
- Control buttons with integrated LEDs for status indication.

Control unit Audio REG Gira 128700, supplied

- Power supply for the polarity-proof and short-circuit-proof 2-wire bus.
- Self-resetting electronic short-circuit and overload detection for the operating voltages and the bus connection.
- Buttons for system and door-opener programming.
- LED status indicators for operation, overload, system programming and door-opener programming.
- AC 12 V output for powering a standard door opener.
- Permanent AC 12 V output for powering a TKS-TK gateway.
- Relay output to switch a door opener with its own power supply.
- Door-opener switch time steplessly adjustable from 1 to 10 s.

Important information

Camera or intercom provision

The intercom systems must be connected by an electrician. For planning, installation and commissioning, please contact the electrician you trust.

Water protection

To achieve optimal water protection for your mail, the mailbox or mailbox system should, if possible, be located under a canopy.

Mail is only protected from water if it is placed completely inside the box and the insertion flap is closed. Mail that is not fully pushed in allows moisture and dirt to enter the mailbox. This system is protected against ingress of water according to DIN EN 13724. Water ingress is not a basis for complaint.

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Intercom
Functional box prepared for manufacturer	GIRA
Material	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Flush-mounted

Dimensions

Height of single box in mm	BK 400.0 | ZF 200.0
Width of single box in mm	400.0
Capacity in litres	BK 16.0 | ZF 8.0
Height of letterbox slot in mm	35.0
Width of letter slot in mm	360.0
Height of letterbox in mm	External dimension 852.0 | Built-in dimension 820.0
Width of letterbox system in mm	External dimension 450.0 | Installation dimension 420.0
Total width in mm	450.0
Depth in mm	100.0 | Installation dimension 103.5
Weight in kg	17
Delivery condition	Delivered assembled


Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images



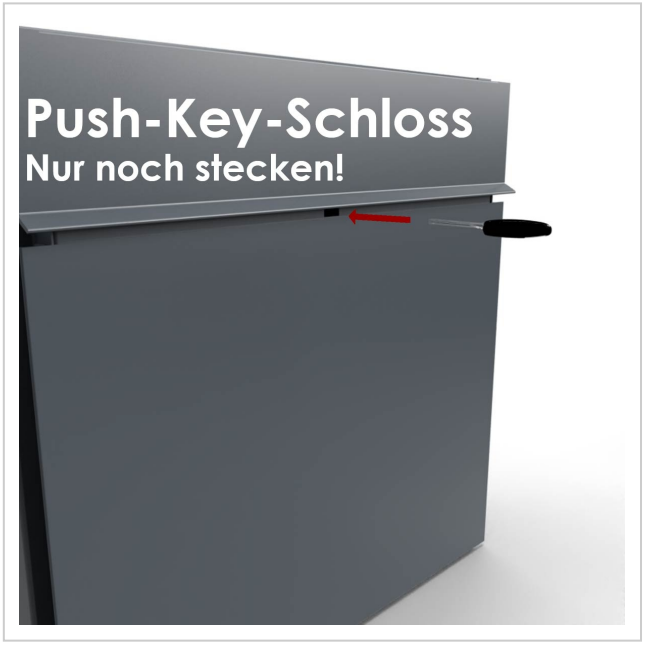






Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

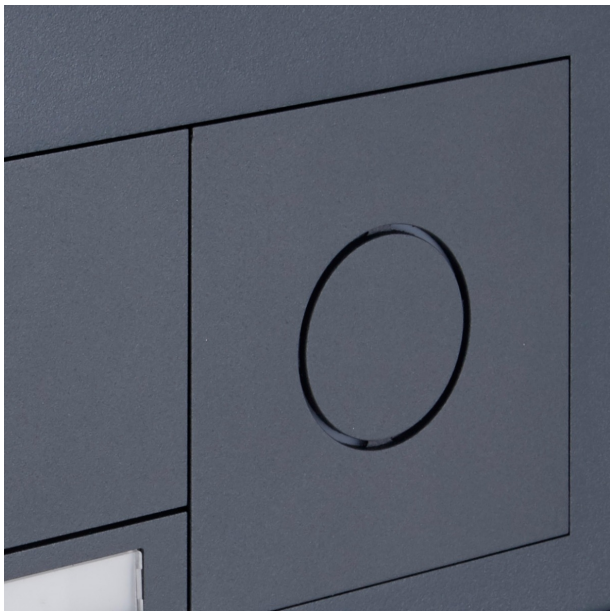





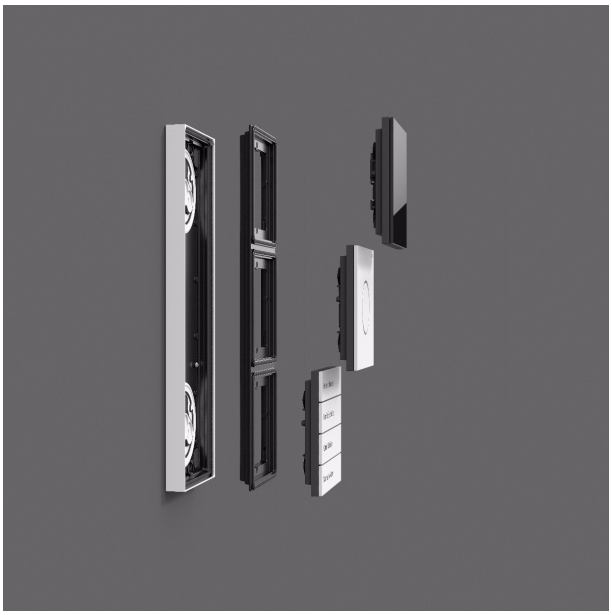

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618



Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618