Designer surface-mounted mailbox GOETHE AP - RAL colour of your choice - GIRA System 106, side-mounted - VIDEO complete set | Left | without newspaper compartment | Gira System 106 Complete Video Set 2DB



Product number 215-AP-1-SPS-KSGI106-L

Product description

Design surface-mounted letterbox GOETHE® AP - RAL colour of your choice - GIRA System 106 side-mounted - VIDEO complete set

High-quality surface-mounted letterbox with seamlessly integrated GIRA System 106 side module in a flush-fit design. The modern GOETHE® letterbox is ideal for a discerning entrance area. The straight-lined shape without a visible lock gives this letterbox a particularly elegant appearance. 3 GIRA System modules are included so the letterbox can be used immediately. The suitable GIRA indoor station and the control unit to complete this letterbox are included. The modules can be exchanged subsequently at will via the simple retention system.

The dimensions of the single box provide a capacity of approx. 16 litres; the large letter slot also guarantees that DIN C4 envelopes and magazines, or post accumulated during several days' absence, do not arrive creased. The innovative Push-Key lock is concealed invisibly inside the letterbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the arrangement of the lock, this letterbox is designed so that the collection door prevents your post from falling towards you. Thanks to the water-drip edge, the internal mail is optimally protected from the weather. The letter flap is fitted with high-quality hinge dampers to ensure a quiet closing and prevent annoying rattling caused by weather influences.

The surface-mounted letterbox systems of the GOETHE® collection are characterised by the consistent use of stainless steel and aluminium. The result is very high durability and sustainability. The construction has been developed by our own engineers with a view to high flexibility and modularity, easy replacement part assembly and uncomplicated self-installation. Spare parts for all GOETHE® systems are available directly in our shop.

Thanks to the design, self-installation is straightforward.

Protected utility model according to DPMA file reference DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- High-quality surface-mounted letterbox made of stainless steel and aluminium.
- Quality manufacturing - Made in Germany by Briefkasten Manufaktur Lippe.
- Letterbox (W x H 400 x 400 mm) made of stainless magnetic steel 1.4016, powder-coated in RAL colour of your choice.
- Innovative Push-Key lock with 2 keys.
- Letters are inserted and retrieved from the front. Letter flap with high-quality hinge dampers for very quiet insertion of mail.
- The letterbox complies with DIN/EN 13724. Insertion dimension (3.5 cm x 36.0 cm) for C4 landscape, so large letters fit in without bending.
- Collection door opens from top to bottom. This prevents your post from falling out towards you.
- Functional box (W x H 200 x 400 mm) made of stainless magnetic steel 1.4016, powder-coated in RAL colour of your choice.
- Nameplate made of stainless steel, powder-coated in RAL colour. Your name and/or a doorbell can optionally be laser-engraved on the nameplate.
- Optionally with laser-engraved house number (a name inscription can also be stored here).
- Optimal weather protection through drip edges and a rain hood made of 3 mm aluminium AlMg3 W19, powder-coated in RAL colour of your choice.
- Side cladding made of 3 mm aluminium AlMg3 W19, powder-coated in RAL colour of your choice.
- Includes mounting rail for wall mounting.
- Includes GIRA indoor station & control unit; System 106 door station module, info module & camera module installed.

GIRA

Camera module Gira System 106 - 5561 000, installed without wiring

- Behind the replaceable black glass pane is a high-quality camera with high light sensitivity. With a field of view of 100° the user is always informed about what is happening at their front door.

Info module Gira System 106 - 5560 920, installed

- For house numbers that are to be prominently displayed.

Door station module Gira System 106 - 5565 920, installed without wiring

- Compact audio module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good intelligibility.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. required from the 3rd camera module).
- All other System 106 modules (except the audio module) are powered via the door station module.

Gira Video AP 7 1209xx indoor station, included

- Video indoor station with a 17.78 cm (7") TFT colour display and convenient hands-free function for surface-mounted installation or wall mounting with a flush-mounted device box or hollow-wall box. With the optional stand (see Accessories) also suitable for placement on furniture. A 32 GB SD memory card is included for internal image storage. Full-surface glass front with touch functionality and tactile feedback.

Video control unit REG Gira 128800, included

- Control unit for supplying the audio and video components of the Gira door communication bus.
- Supplies the polarity-proof and short-circuit resistant 2-wire bus when using video components such as colour camera, TFT colour display.
- Up to 2 door stations with colour camera and 28 indoor stations with TFT colour display can be powered via the video control unit.
- In total, up to 15 colour cameras can be controlled by the video control unit (5 video door stations and 10 TKS camera gateways), of which two door stations with colour camera can be powered by the video control unit. The additional colour cameras must each be operated with their own power supply for door communication.
- Self-resetting electronic short-circuit and overload detection of the operating voltages and the bus connection.
- Buttons for system and door-opener programming.
- LED status indicators for operation, overload, system programming and door-opener programming.
- AC 12 V output for powering a conventional door opener.
- Relay output for switching a door opener with its own power supply.
- Door-opener switching time continuously adjustable from 1 to 10 s.

Important information

Camera or intercom preparation

The intercom systems must be connected by a qualified electrician. For planning, installation and commissioning, please contact the electrician of your choice.

Water protection

To achieve optimal protection of your mail from water, the mailbox or mailbox system should, if possible, be located under a canopy.

Mail is only protected from water when it is placed completely inside the box and the letter flap is closed. Partially inserted mail allows moisture and dirt to enter the letterbox. This system is protected against water ingress in accordance with DIN EN 13724. Water ingress is not grounds for a complaint.

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Camera, Intercom
Functional box prepared for manufacturer	GIRA
Material	Aluminium AlMg3 W19, Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Surface-mounted

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions


Height of single box in mm	BK 400.0 | FK 400.0
Width of single box in mm	BK 400.0 | FK 200.0
Capacity in litres	16
Height of letterbox slot in mm	35,0
Width of letter slot in mm	360,0
Height of letterbox in mm	400,0
Width of letterbox system in mm	600,0
Total width in mm	408,0
Depth in mm	100.0 + 25.0 Rain roof
Weight in kg	19
Delivery condition	Delivery is assembled

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimension drawing

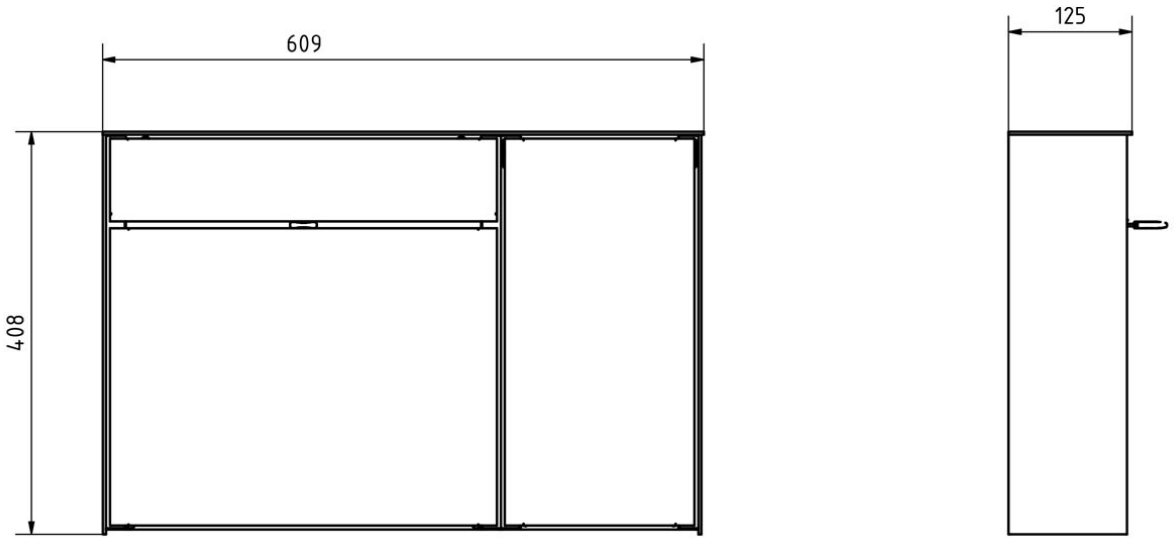


Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images



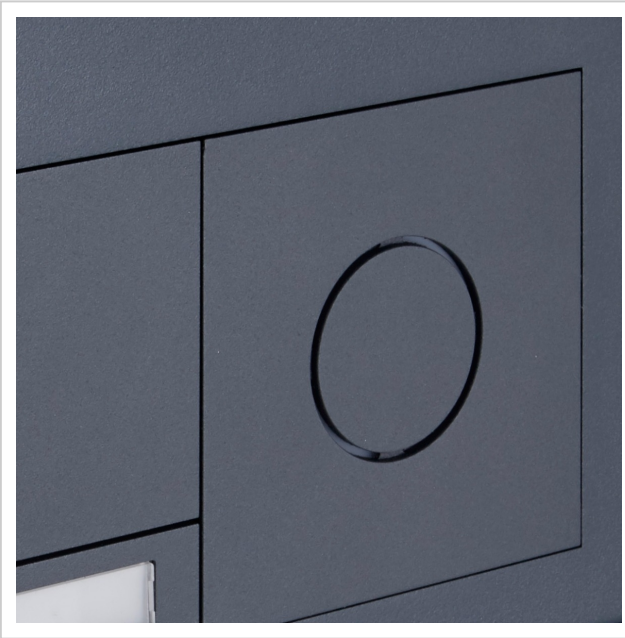






Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618



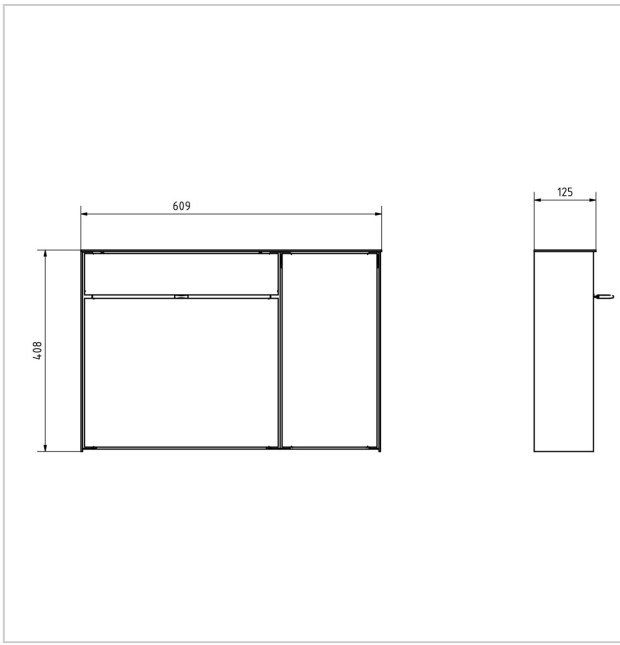






Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

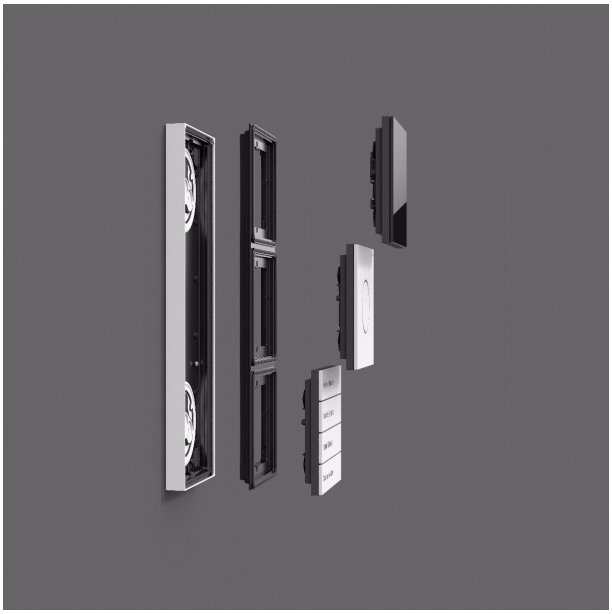



Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618