3-compartment freestanding mailbox Design BASIC 385P-9016 ST-T with bell box - RAL 9016 traffic white | RAL 9016 Traffic White, fine-textured matt | Top | with 3 mailboxes



Product number 385P-9016-3-SP

Product description

Freestanding mailbox system BASIC 385P with bell/intercom unit for 3 parties – RAL 9016 Traffic White

The freestanding BASIC 385P mailbox system for 3 parties combines 3 separately usable mail compartments with an integrated bell function box. This brings mail reception, doorbell buttons and the provision for a compatible door intercom system together in a robust, visually cohesive entrance solution for two- and small multi-family houses, office and practice properties. The bell function box is integrated directly into the overall unit.

The mailboxes are made of galvanised steel and powder-coated in RAL 9016 Traffic White fine-texture matt. A close-fitting side cladding with rain hood and integrated rain drainage channels enhance weather protection. The solidly manufactured support elements made of anodised aluminium profile are also powder-coated in RAL 9016 Traffic White and provide an especially stable, durable base for the freestanding unit.

Each of the 3 mail compartments offers approx. 12 litres of volume. The 35 × 265 mm insertion opening is designed for DIN C4 items in portrait format. A noise-damping rubber lip reduces the impact of the insertion flap. Mail is retrieved from the front; the access doors open from left to right. Each mailbox is supplied with two keys with key number and a replaceable nameplate located beneath the insertion flap.

The advantages of the BASIC 385P mailbox system at a glance

Integrated bell function box

The unit combines 3 mailboxes with 3 stainless steel doorbell buttons and a speaker aperture with universal adapter. This creates a central, tidy solution for mail and visitor communication.

Solid aluminium support elements

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Solidly manufactured, anodised aluminium profiles form the stable base of the freestanding unit. The powder-coated construction combines high load-bearing capacity with a durable outdoor finish.

DIN C4 insertion opening with 12 litre volume

The mailboxes each offer approx. 12 litres of mail volume. The 35 × 265 mm insertion opening accepts DIN C4 items in portrait format without unnecessary bending of larger envelopes.

Prepared for door communication

The speaker aperture with universal adapter is prepared for many commercially available flush-mount speakers.

Robust BASIC quality in RAL 9016 Traffic White

Galvanised steel, stainless steel components, solid aluminium support elements and German manufacturing result in a resilient mailbox system for long-term use at the property entrance.

Equipment of the BASIC 385P mailbox system

Mailbox system

Number of mailboxes 3 separately usable mail compartments
Mailbox dimensions 300 × 110 × 385 mm (W × H × D) per compartment
Mail volume Approx. 12 litres per mailbox
Material Galvanised steel; side cladding and rain hood in stainless steel V2A
Finish RAL 9016 Traffic White fine-texture matt
Insertion opening 35 × 265 mm, suitable for DIN C4 portrait
Standard Mailboxes conforming to DIN EN 13724

Bell and intercom unit

Bell function box Galvanised steel, powder-coated to match
Position Integrated into the unit
Doorbell buttons 3 round stainless steel doorbell buttons, type 4
Speaker aperture With universal adapter for standard flush-mount speakers
Nameplate Tamper-proof and impact-resistant design

Solid aluminium support elements

Support elements Solidly manufactured anodised aluminium profile
Coating Powder-coated in RAL 9016 Traffic White
Mounting options Either screw mounting or embedding in concrete
Screw mounting Support elements available in 1200 or 1600 mm
Embedding in concrete Support elements available in 1600 or 2000 mm
Delivery condition Support elements and mailbox system delivered divided for assembly
Manufacturing Made in Germany by Briefkasten Manufaktur Lippe

Note regarding the bell/intercom unit

The universal adapter is suitable for many commercially available flush-mount speakers. Intercom system or flush-mount speakers, power supply and cabling are not part of the basic equipment described and must be provided to suit the planned system.

Mounting on a foundation

For screw mounting, a level and sufficiently load-bearing foundation is required. Fixings must be chosen to suit the foundation, the weight of the unit and the local installation situation.

Mounting by embedding in concrete

For the embed-in-concrete version, the extended aluminium support elements are anchored vertically in a suitably dimensioned concrete foundation. Foundation size and embedment depth must be adapted to ground conditions, unit dimensions and local loads.

Note on weather protection

The rain hood, close-fitting side cladding and rain drainage channels support weather protection. Postal items must be fully inserted so that the insertion flaps can close completely. Under extreme weather conditions, small amounts of moisture may penetrate despite compliance with standards.

Product properties

Material	Steel, galvanised, Aluminium AlMg3 W19, Stainless steel V2A 1.4301
Series	BASIC
Number of bell push buttons	3 buttons
Functions	Light button, Intercom
Functional box prepared for manufacturer	GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, Comelit
Boxes by volume	Normal > 10 litres
Name labelling	Nameplate
Mounting type	Free-standing
Removal of mail	On the front
Number of boxes	with 3 letterboxes
Surface/colour	RAL 9016 traffic white

Dimensions

Height of single box in mm	110.0
Width of single box in mm	300.0
Capacity in litres	12
Height of letterbox slot in mm	35.0
Width of letter slot in mm	265.0
Overall height in mm	1200.0 | 1600.0
Total width in mm	400.0
Depth in mm	435.0
Weight in kg	33
Delivery condition	Delivery is in blocks; freestanding elements / mailbox are delivered in parts.


Dimension drawing


Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Montagebohrungen

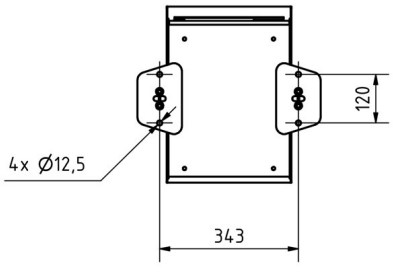

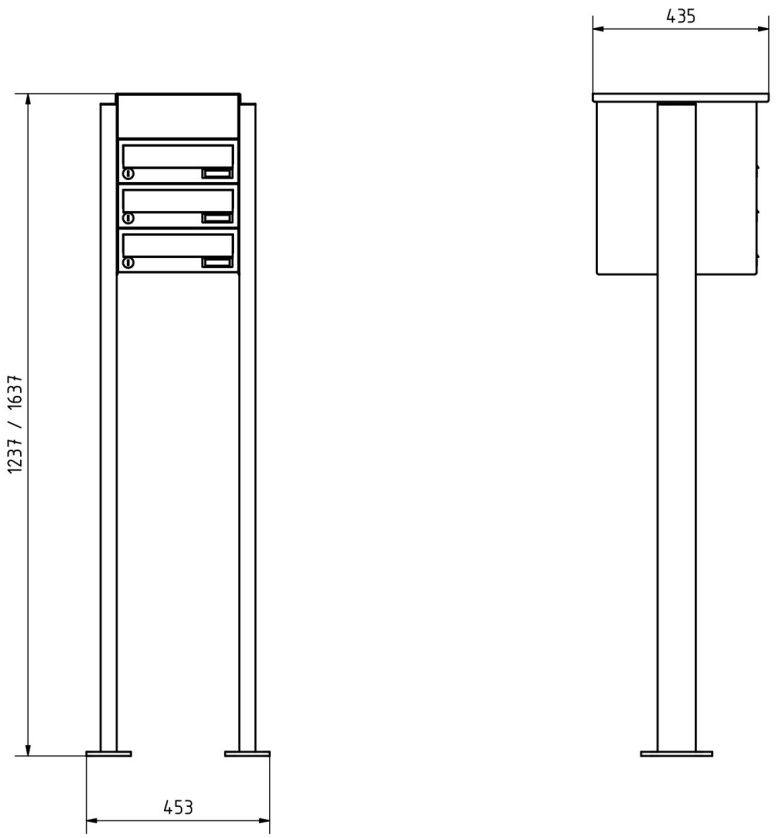


Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images

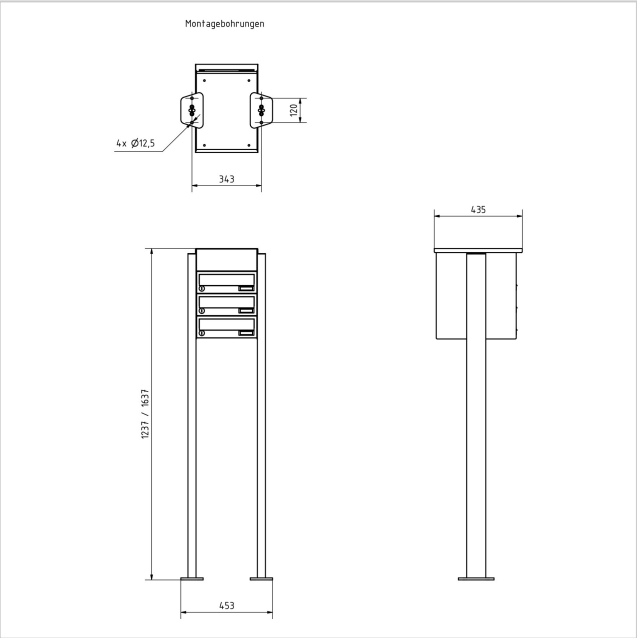







Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618