11-unit free-standing mailbox system Design BASIC 385P-7016-SP with bell-intercom unit, including side cladding & rain hood - horizontal mailboxes - Anthracite grey RAL 7016 | RAL 7016 Anthracite grey, fine texture, matt | Right | with 11 mailboxes



Product number 385P-7016-11S-SP-R

Product description

Freestanding mailbox system BASIC 385P with bell/intercom unit on the right for 11 households – RAL 7016 Anthracite grey – narrow version

The freestanding BASIC 385P mailbox system for 11 households combines 11 individually usable mail compartments with an integrated bell function box. This consolidates mail reception, doorbell buttons and the provision for a compatible door communication system into a robust, visually unified entrance solution for larger apartment buildings, residential complexes and commercial properties. In this variant, the bell/intercom unit is positioned to the right of the mailbox system.

The mailboxes are made from galvanised steel and are powder-coated in RAL 7016 Anthracite grey with a fine-textured matt finish. A close-fitting side cladding with a rain hood and integrated rain drainage channels support weather protection. The solidly manufactured support uprights are made from anodised aluminium profile, are also powder-coated in RAL 7016 Anthracite grey and form a particularly stable, durable base for the freestanding unit.

Each of the 11 mail compartments has approximately 12 litres of volume. The 35 × 265 mm insertion aperture is designed for DIN C4 items in portrait orientation. A noise-damping rubber lip reduces the impact of the insertion flap. Mail is collected from the front; the access doors open from left to right. Each mailbox is supplied with two keys with key number and a replaceable nameplate below the insertion flap.

The advantages of the BASIC 385P mailbox system at a glance

Integrated bell function box on the right

The unit combines 11 mailboxes with 11 stainless steel doorbell push-buttons and a speaker aperture with universal adapter. This creates a central, tidy solution for mail and visitor communication.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Solid aluminium support uprights

Solidly manufactured, anodised aluminium profiles form the stable base of the freestanding unit. The powder-coated construction combines high load-bearing capacity with a durable finish for outdoor use.

DIN C4 insertion with 12-litre volume

The mailboxes each offer approximately 12 litres of mail volume. The 35 × 265 mm insertion aperture accepts DIN C4 items in portrait orientation without larger envelopes needing to be unnecessarily folded.

Prepared for door communication

The speaker aperture with universal adapter is prepared for many commercially available flush-fit speakers.

Robust BASIC quality in RAL 7016 Anthracite grey

Galvanised steel, stainless steel components, solid aluminium support uprights and German manufacturing result in a resilient mailbox system for long-term use at the property entrance.

Equipment of the BASIC 385P mailbox system

Mailbox system

Number of mailboxes 11 individually usable mail compartments
Mailbox dimensions 300 × 110 × 385 mm (W × H × D) per compartment
Mail volume Approx. 12 litres per mailbox
Material Galvanised steel; side cladding and rain hood made from stainless steel V2A
Finish RAL 7016 Anthracite grey fine-textured matt
Insertion aperture 35 × 265 mm, suitable for DIN C4 portrait
Standard Mailboxes compliant with DIN EN 13724

Bell and intercom unit

Bell function box Galvanised steel, powder-coated to match
Position Right
Doorbell push-buttons 11 round stainless steel doorbell push-buttons type 4
Speaker aperture With universal adapter for commercially available flush-fit speakers
Nameplate Designed to resist indentation and impact

Solid aluminium support uprights

Support uprights Solidly manufactured, anodised aluminium profile
Coating Powder-coated in RAL 7016 Anthracite grey
Installation methods Selectable: bolted installation or concreting into ground
Bolted installation Support uprights selectable in 1200 or 1600 mm
Concreting into ground Support uprights selectable in 1600 or 2000 mm
Delivery condition Support uprights and mailbox system delivered split for installation
Manufacture Made in Germany by Briefkasten Manufaktur Lippe

Note regarding the bell/intercom unit

The universal adapter is suitable for many commercially available flush-fit speakers. Intercom systems or flush-fit speakers, power supply and cabling are not part of the described basic equipment and must be provided to suit the planned system.

Installation on a foundation

For bolted installation, a level and sufficiently load-bearing foundation is required. Fixings must be selected to suit the foundation, the weight of the unit and the local installation situation.

Installation by concreting into ground

For the concreting version, the extended aluminium support uprights are anchored vertically in a suitably dimensioned concrete foundation. Foundation size and embedment depth must be aligned to ground conditions, unit dimensions and local loads.

Note on weather protection

The rain hood, close-fitting side cladding and rain drainage channels support weather protection. Mail items must be fully inserted so that the insertion flaps can close completely. Under extreme weather conditions, slight moisture ingress may occur despite standards-compliant execution.

Product properties

Material	Steel, galvanised, Aluminium AlMg3 W19, Stainless steel V2A 1.4301
Series	BASIC
Number of bell push buttons	11 buttons
Functions	Light button, Intercom
Functional box prepared for manufacturer	GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, Comelit
Boxes by volume	Normal > 10 litres
Name labelling	Nameplate
Mounting type	Free-standing
Surface/colour	RAL 7016 anthracite grey
Removal of mail	On the front
Number of boxes	with 11 letterboxes

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions

Height of single box in mm	110.0
Width of single box in mm	300.0
Capacity in litres	12
Height of letterbox slot in mm	35.0
Width of letter slot in mm	265.0
Overall height in mm	1200.0 | 1600.0
Total width in mm	980.0
Depth in mm	435.0
Weight in kg	83
Delivery condition	Delivery is made in blocks; freestanding elements / mailbox delivered separately.


Dimension drawing


Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Montagebohrungen

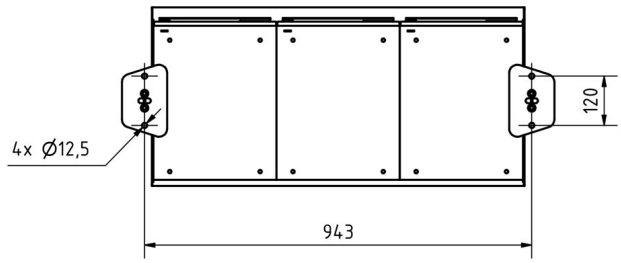

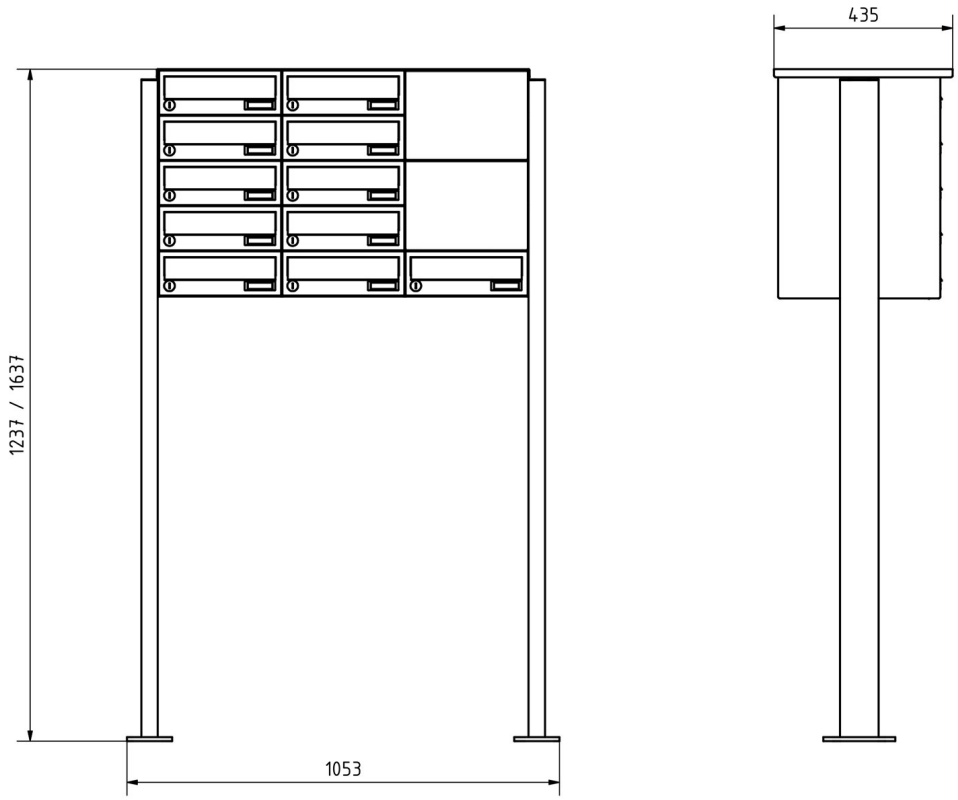


Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images



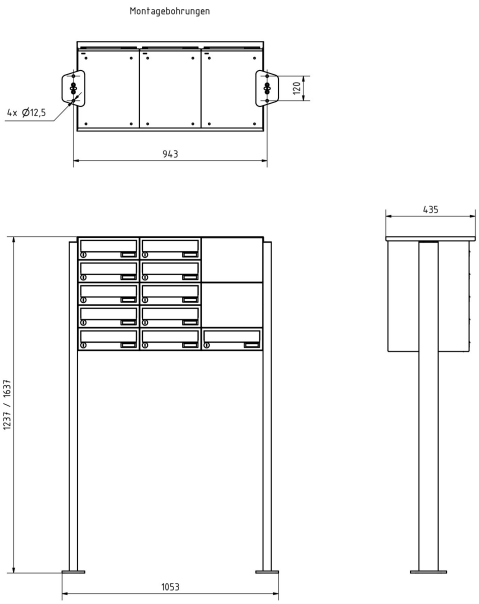





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618









Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618