Designer flush-mounted door station GOETHE UP with GIRA System 106 - Complete video set - RAL colour of your choice

Product number 215-SP-UP-1-KSGI106



Product description

Design flush-mounted door station GOETHE UP with GIRA System 106 – VIDEO complete set – RAL colour of your choice

High-quality door station with a seamlessly integrated GIRA System 106 in a flush-mounted design. The matching GIRA indoor station and the control unit to complete this door station are included. The modules can be exchanged later as required thanks to the simple mounting system.

The mailbox systems of the GOETHE collection are characterised by the consistent use of stainless steel. The result is very high longevity and sustainability. The construction has been developed by our own engineers with a view to high flexibility and modularity, simple spare-part installation and straightforward self-assembly. Spare parts for all GOETHE systems are available directly in our shop.

Thanks to the construction design, self-installation is uncomplicated.

Protected utility model according to DPMA file reference DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Flush-mounted door station completely made of stainless steel.
- Quality manufacture - Made in Germany by Briefkasten Manufaktur Lippe.
- Functional box (BH 200x400 mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- The front panel opens from top to bottom.
- Nameplate/bell button made of stainless steel, powder-coated in RAL colour. Your name and/or a bell symbol can be laser-engraved on the nameplate as an option.
- Optionally with house number, laser-engraved (a name inscription can also be stored here).
- Plaster cover frame made of stainless steel angle profile 25 x 58 mm, powder-coated in RAL colour.
- Includes GIRA indoor station & control unit supplied; System 106 door-station module, info module & camera module fitted.

GIRA

Camera module GIRA System 106 - 5561 000, installed without cabling

- Behind the interchangeable black glass pane is a high-quality camera with high light sensitivity. With a 100° field of view the user is always aware of what is happening at their front door.

Info module GIRA System 106 - 5560 920, fitted

- For house numbers that should be displayed prominently.

Door-station module GIRA System 106 - 5565 920, installed without cabling

- Compact audio module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure clear communication.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. required from the third camera module).
- All other System 106 modules (except the audio module) are powered via the door-station module.

GIRA Video indoor station AP 7 1209xx, supplied

- Video indoor station with a 17.78 cm (7") TFT colour display and convenient hands-free function for surface-mounted installation or wall mounting with a flush-mount device box or hollow-wall box. With the optional stand (see Accessories) also suitable for placement on furniture. A 32 GB SD memory card is included for internal image storage. Full-surface glass front with touch functionality and tactile feedback.

Video control unit REG GIRA 128800, included

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Control unit for supplying the audio and video components of the GIRA door-communication bus.
- Supplies the polarity-protected and short-circuit-proof 2-wire bus when using video components such as a colour camera and TFT colour display.
- Up to 2 door stations with colour camera and 28 indoor stations with TFT colour display can be powered via the video control unit.
- In total, up to 15 colour cameras can be controlled by the video control unit (5 video door stations and 10 TKS camera gateways), of which two door stations with colour camera can be powered by the video control unit. The remaining colour cameras must each be operated with their own power supply for door communication.
- Self-resetting electronic short-circuit and overload detection for the operating voltages and the bus connection.
- Buttons for system and door-opener programming.
- LED status indicators for operation, overload, system programming and door-opener programming.
- AC 12 V output to power a standard door opener.
- Relay output to switch a door opener with its own power supply.
- Door-opener switching time continuously adjustable from 1 to 10 s.

Important information

Camera or intercom provision

The intercom systems must be connected by a qualified electrician. Please contact the electrician of your choice for planning, installation and commissioning.

Water protection

To achieve optimal protection of your post from water, the mailbox or mailbox system should, where possible, be located under a canopy.

Postal items are only protected from water if they are placed completely inside the box and the flap is closed. Partially inserted mail allows moisture and dirt to enter the mailbox. This system is protected against water ingress according to DIN EN 13724. Water ingress is not grounds for complaint.

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Camera, Intercom
Functional box prepared for manufacturer	GIRA
Material	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Mounting type	Flush-mounted

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions

Width in mm	Outer dimension 250 | installation dimension 203
Height in mm	External dimension 450 | installation dimension 403
Overall height in mm	recommended 1500.0 - 1700.0
Total width in mm	Außenmaß 250 | Einbaumaß 220
Depth in mm	100.0 | installation dimension 98.5
Weight in kg	5
Delivery condition	Delivery is assembled

Dimension drawing

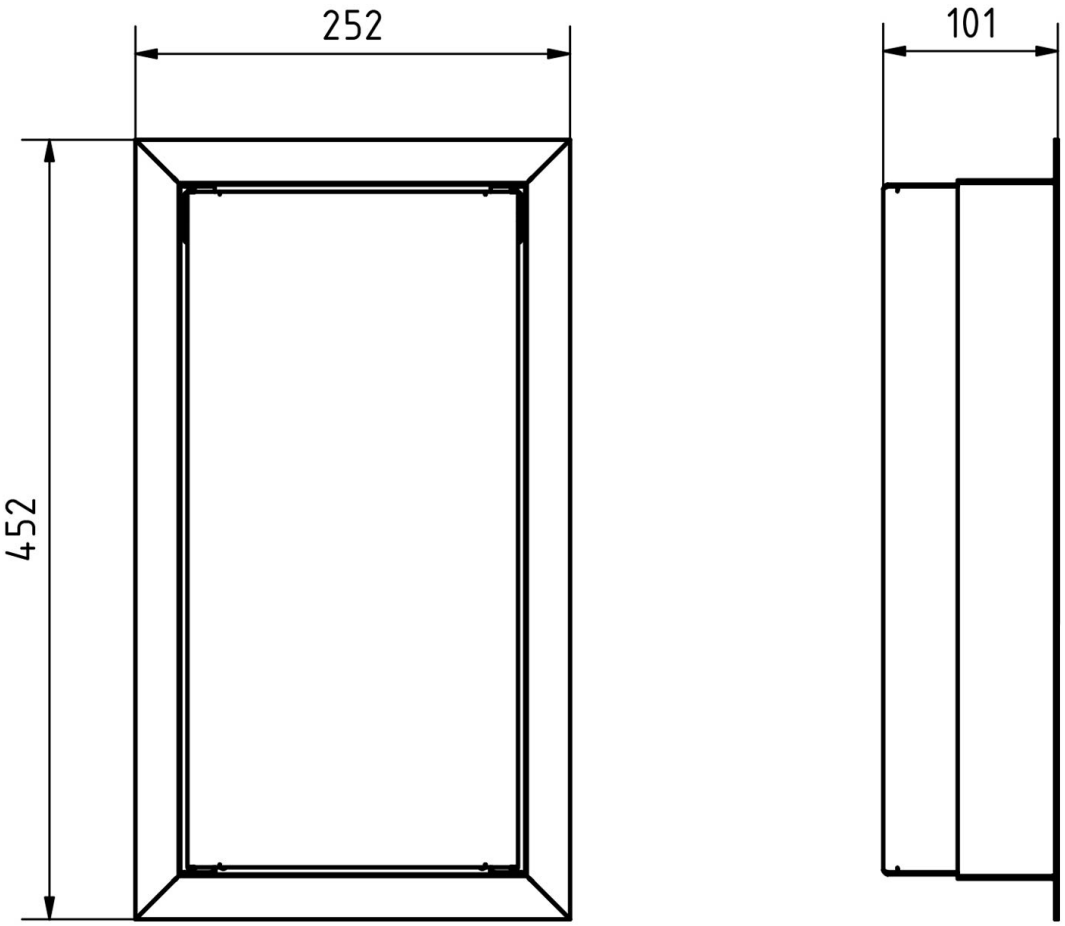

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110


Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images





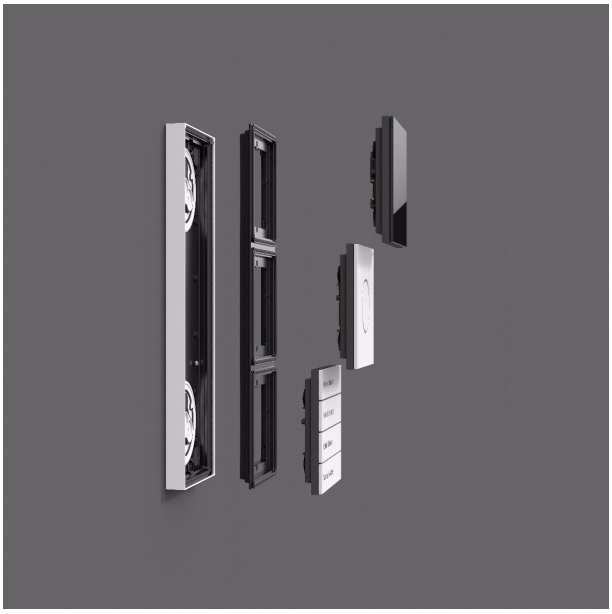

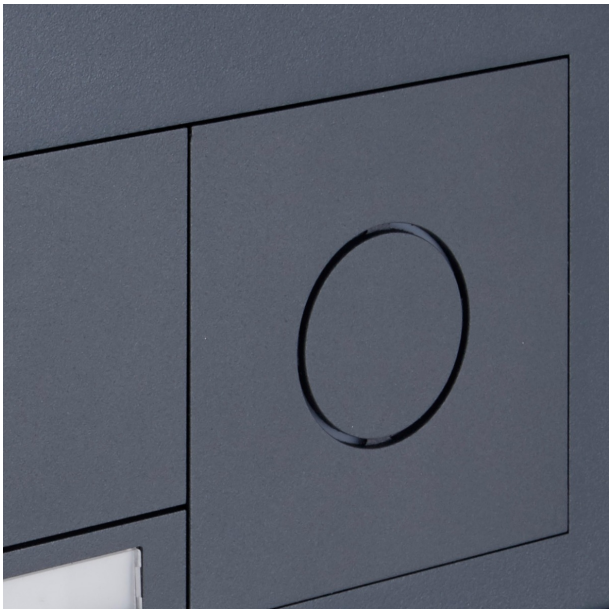


Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618



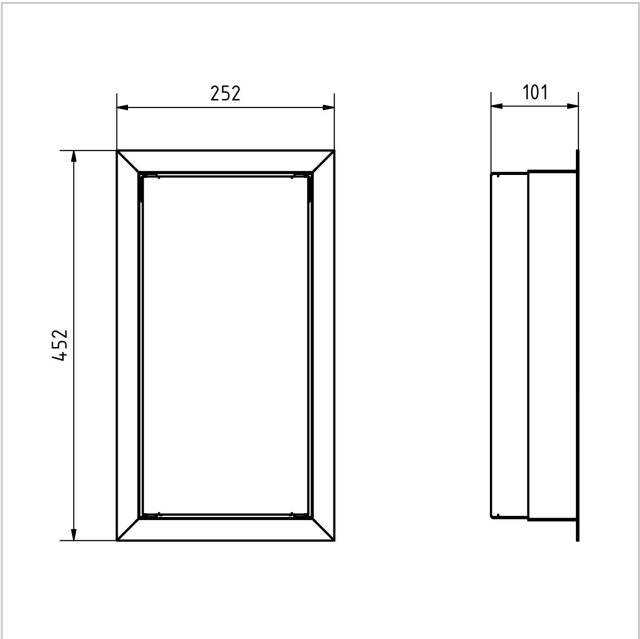





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618