2-compartment surface-mounted letterbox BASIC Plus 382X AP with side-mounted bell box - RAL colour of your choice | Right | 150mm depth | ? Colour of your choice | with 2 letterboxes (2x1)



Product number 382XA-2W-SP-RAL-150-R

Product description

2-unit surface-mounted mailbox BASIC Plus 382X AP with side bell box - RAL colour of your choice

German quality manufacturing "Made in Germany" by Briefkasten Manufaktur. The complete surface-mounted mailbox is made of weather-resistant stainless steel V2A, powder-coated in a RAL colour. A rain run-off edge for optimal water protection, a double-folded letter flap with rubber buffer, a solid replaceable nameplate, a practical mail retention bracket and a very robust lock characterise this stainless steel mailbox.

The mailbox systems of the BASIC Plus collection are characterised by the consistent use of stainless steel V2A. The result is very high longevity and sustainability. The construction has been developed by our own engineers with a focus on high flexibility and modularity, easy spare-part assembly and uncomplicated self-installation. Spare parts are directly available for all BASIC Plus systems.

Thanks to the design, self-installation is uncomplicated. The mailbox system is prepared for straightforward complete installation; there is no need for complex wall mounting of individual boxes. 2-unit surface-mounted mailbox made of high-quality, weather-resistant stainless steel V2A 1.4301, powder-coated in a RAL colour of your choice.

Benefits at a glance

Close-fitting stainless steel cladding with rain hood

Side cladding and rain hood are included in this version and are made of stainless steel V2A, powder-coated in a RAL colour. The close-fitting design forms a closed, structurally coordinated unit with the mailbox system.

Generous letter aperture

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

The letter aperture measures 35 × 325 mm and is sized for DIN C4 landscape. The mailbox complies with DIN EN 13724.

Quiet insertion and convenient removal

The integrated flap damping with rubber buffer reduces impact noise during insertion. The mail retention bracket holds items back during removal.

Integrated bell and intercom area

Bell box made of stainless steel V2A 1.4301, powder-coated in RAL colour. The doorbell push button used is the stainless steel bell push Type 4. Optionally prepared with a speaker grille for the installation of standard intercom systems or flush-mounted loudspeakers. (Intercom system/flush loudspeaker not included). An option with the Comelit Ultra video complete set is also available.

Quality manufacturing and thoughtful construction

The system is manufactured at the Briefkasten Manufaktur in Germany. The construction is designed for uncomplicated self-installation.

Equipment and product details

Mailbox system

Number of mailboxes 2 separately usable mail compartments
Arrangement 2 × 1
Depth 150 mm
Mailbox material Stainless steel V2A 1.4301
Mailbox finish Powder-coated in a RAL colour of your choice
Bell/intercom section Bell box made of stainless steel V2A 1.4301, powder-coated in RAL colour

Mail and operation

Letter aperture 35 × 325 mm, suitable for DIN C4 landscape
Standard DIN EN 13724
Letter flap Noise-dampened by rubber buffer
Keys 2 keys with key number per mailbox
Nameplate Replaceable nameplate below the letter flap
Mail retention bracket Integrated for each mailbox

Installation and fittings

Mounting type Surface-mounted
Rain run-off edge Integrated into the construction
Rain hood Made of stainless steel V2A, powder-coated in a RAL colour of your choice
Side cladding Made of stainless steel V2A, powder-coated in a RAL colour of your choice
Mounting materials For wall mounting including mounting rail and fixing materials (screws + wall plugs)
Manufacture Made in Germany by Briefkasten Manufaktur Lippe

Note on weather protection

Mail items are best protected from moisture and soiling when fully inserted and with the flap closed. Bulky protruding items may prevent the flap from closing completely.

Note on wall mounting

Before mounting, the load-bearing capacity and condition of the wall must be checked. Fixings must be matched to the weight of the system and the existing wall construction.

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	BASIC
Number of bell push buttons	1 button, 2 buttons, 3 buttons
Functions	Light button, Intercom
Functional box prepared for manufacturer	GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, Comelit
Name labelling	Nameplate
Material	Stainless steel V2A 1.4301
Number of boxes	with 2 letterboxes
Removal of mail	On the front
Boxes by volume	Large > 16 litres
Mounting type	Surface-mounted

Dimensions

Height of single box in mm	330.0
Width of single box in mm	355.0
Capacity in litres	12.0 | 17.0
Height of letterbox slot in mm	35.0
Width of letter slot in mm	325.0
Height of letterbox in mm	330.0
Width of letterbox system in mm	880.0
Total width in mm	880.0
Depth in mm	100.0 | 150.0
Weight in kg	12

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images









Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

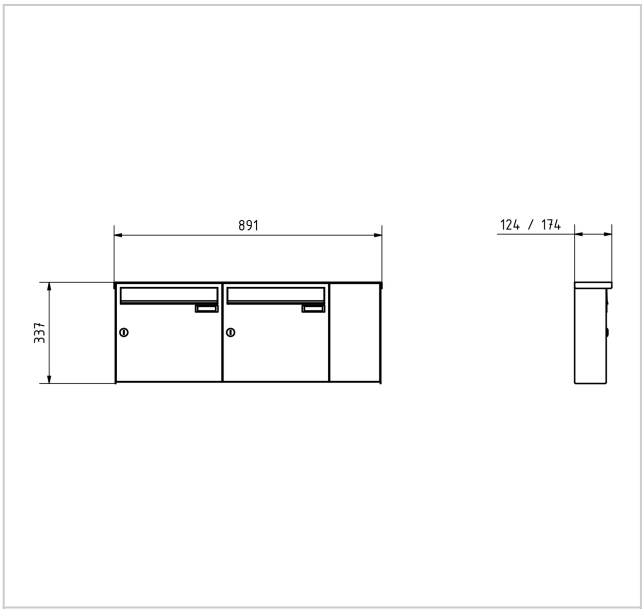





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618