6-unit (3x2) freestanding mailbox Design BASIC 385P ST-T with doorbell housing - stainless steel RAL 7016 anthracite | Left | BI-Color brushed stainless steel | RAL 7016 anthracite grey | with 6 letterboxes



Product number 385P-7016VA-6W-SP-L

Product description

Freestanding mailbox system BASIC 385P with bell/intercom module left for 6 households – BI-Color stainless steel / RAL 7016 – wide version

The freestanding BASIC 385P mailbox system for 6 households combines 6 separately usable mail compartments with an integrated bell function enclosure. This provides a robust, visually unified entrance solution for multi-family houses, smaller residential complexes and commercial properties by combining mail reception, bell buttons and preparation for a compatible door intercom system. In this variant, the bell/intercom module is positioned to the left of the mailbox system.

The mailbox bodies are made of galvanised steel and are powder-coated in RAL 7016 Anthracite grey with a fine-textured matt finish. Brushed stainless-steel mail slots create a high-quality BI-Color accent. Side panels and rain hood are made of stainless steel V2A and are powder-coated to match in RAL 7016. Particularly notable are the solidly manufactured anodised aluminium profile stand elements, which are also coated in anthracite grey and provide a secure, very robust base for the system.

Each of the 6 mail compartments offers approx. 12 litres of volume. The 35 × 265 mm mail slot is designed for DIN C4 items in portrait orientation. A noise-dampening rubber lip reduces the impact of the mail flap. Mail is retrieved from the front; the access doors open from left to right. Each mailbox is supplied with two numbered keys and a changeable nameplate beneath the mail slot.

Advantages of the BASIC 385P mailbox system at a glance

Integrated bell function enclosure on the left

The system combines 6 mailboxes with 6 stainless-steel bell buttons and a talk-through opening with a universal adapter. This creates a central, tidy solution for mail and visitor communication.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Solid aluminium stand elements

Solidly manufactured, anodised aluminium profiles form the stable base of the freestanding system. The powder-coated construction combines high load-bearing capacity with a durable finish for outdoor use.

DIN C4 insertion with 12-litre volume

The mailboxes each provide approx. 12 litres of mail volume. The 35 × 265 mm mail slot accepts DIN C4 items in portrait orientation without the need to unnecessarily fold larger envelopes.

Prepared for door communication

The talk-through opening with universal adapter is prepared for many commercially available built-in speakers.

BI-Color stainless steel / RAL 7016

Brushed stainless-steel mail slots provide a high-quality contrast to the anthracite-grey mailbox bodies. The robust material combination pairs modern aesthetics with durable everyday practicality.

Specification of the BASIC 385P mailbox system

Mailbox system

Number of mailboxes 6 separately usable mail compartments
Mailbox dimensions 300 × 110 × 385 mm (W × H × D) per compartment
Mail volume Approx. 12 litres per mailbox
Material Galvanised steel; side panels and rain hood in stainless steel V2A
Finish BI-Color: RAL 7016 Anthracite grey with brushed stainless-steel mail slots
Mail slot 35 × 265 mm, suitable for DIN C4 portrait
Standard Mailboxes conforming to DIN EN 13724

Bell and intercom module

Bell function box Galvanised steel, powder-coated to match
Position Left
Bell buttons 6 round stainless-steel bell buttons, Type 4
Talk-through opening With universal adapter for standard built-in speakers
Nameplate Designed to resist indentation and impact

Solid aluminium stand elements

Stand elements Solidly manufactured anodised aluminium profile
Coating Powder-coated in RAL 7016 Anthracite grey
Mounting options Either bolted installation or embedding in concrete
Bolted installation Stand elements available in 1200 or 1600 mm
Embedding in concrete Stand elements available in 1600 or 2000 mm
Delivery condition Stand elements and mailbox system delivered split for installation
Manufacture Made in Germany by Briefkasten Manufaktur Lippe

Note on the bell/intercom module

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

The universal adapter is suitable for many commercially available built-in speakers. Intercom systems or built-in speakers, power supply and cabling are not included in the standard equipment described and must be provided to suit the planned system.

Mounting on a foundation

For bolted installation a level and sufficiently load-bearing foundation is required. Fixings must be selected to suit the foundation, system weight and the local installation situation.

Installation by embedding in concrete

For the embedment version, the extended aluminium stand elements are plumb-anchored in a suitably dimensioned concrete foundation. Foundation size and embedment depth must be matched to ground conditions, system dimensions and local loads.

Note on weather protection

The rain hood, close-fitting side panels and rain drainage channels support weather protection. Mail items must be fully inserted so that the mail slots can close completely. In extreme weather conditions small amounts of moisture may penetrate despite standards-compliant construction.

Product properties

Material	Steel, galvanised, Aluminium AlMg3 W19, Stainless steel V2A 1.4301
Series	BASIC
Number of bell push buttons	6 buttons
Functions	Light button, Intercom
Functional box prepared for manufacturer	GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, Comelit
Number of boxes	with 6 letterboxes
Boxes by volume	Normal > 10 litres
Name labelling	Nameplate
Mounting type	Free-standing
Surface/colour	RAL 7016 anthracite grey, Brushed
Removal of mail	On the front

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions

Height of single box in mm	110.0
Width of single box in mm	300.0
Capacity in litres	12
Height of letterbox slot in mm	35.0
Width of letter slot in mm	265.0
Overall height in mm	1200.0 | 1600.0
Total width in mm	680.0
Depth in mm	435.0
Weight in kg	63
Delivery condition	Delivery is made in blocks; freestanding elements / mailbox are delivered separately.


Dimension drawing


Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Montagebohrungen

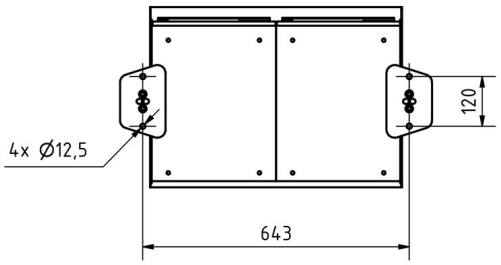

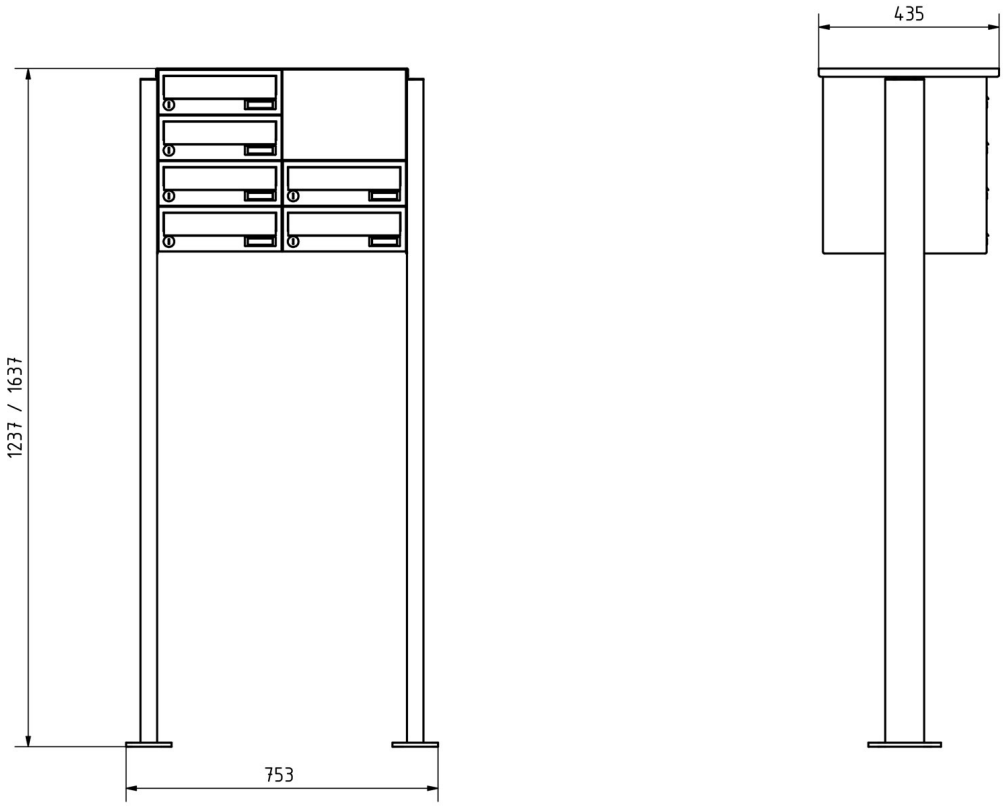

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images









Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618










Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

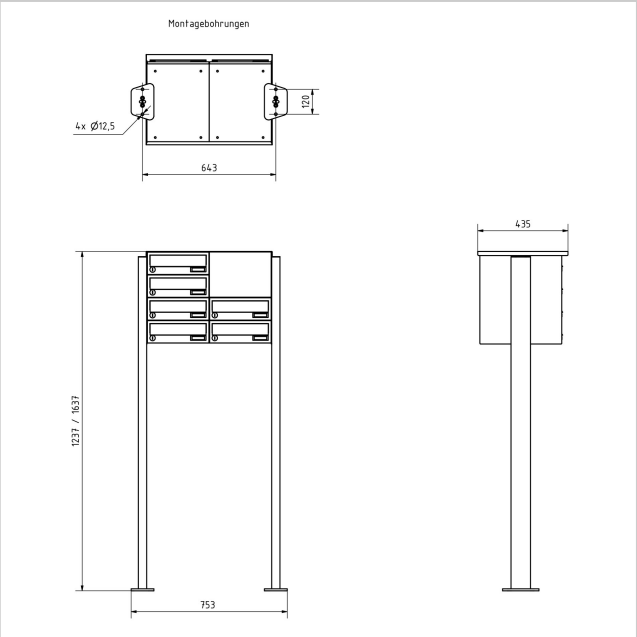



Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618