
DoorBird IP video apartment station A1101 | White

Product number 1298-A1101-WH

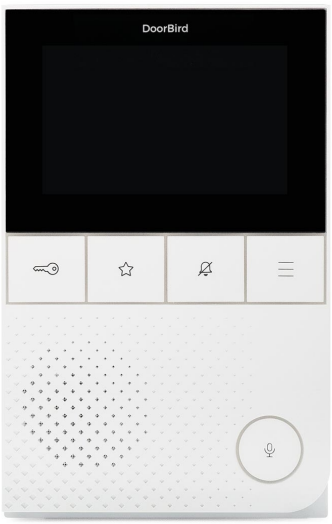

Product description

DoorBird IP Video Indoor Station A1101 White Edition

The DoorBird IP Video Indoor Station A1101 White Edition is a convenient addition to DoorBird IP video door stations for single- and multi-family homes as well as commercial and public buildings. It enables live video, two-way audio and the control of doors, gates or other connected functions directly indoors.

The discreet housing made of white polycarbonate blends unobtrusively into modern residential and commercial interiors. The 4-inch True Color touch display with scratch-resistant Gorilla® safety glass provides a clear image and an intuitive user interface. In addition, the main functions can be accessed via five hardware buttons without using the touchscreen.

Door communication with video, audio and status indicator

Custom ringtones allow distinction between front-door, floor or gate calls. The configurable RGB LED status bar on the underside of the indoor station supports visual signalling. With multiple indoor stations, room-to-room communication can also be used.

Flexible network connection via Wi-Fi, Ethernet or PoE

The indoor station can be connected to the network via Wi-Fi or network cable. For wired installation, power supply via Power over Ethernet is possible. If the internet connection fails, functions within the local network with connected DoorBird door stations remain available.

Technical data

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Product	DoorBird IP Video Indoor Station A1101 White Edition
Version	Polycarbonate, white
Mounting type	Surface-mounted Table stand A8003 available separately
Power supply	15 - 48 V DC, max. 15 W, or Power over Ethernet, PoE 802.3af Mode-A
Power consumption	5 W
Operating conditions	0 °C to +55 °C Relative humidity 0% to 85%, non-condensing
Connections	LAN/PoE (T+, T-, R+, R-) Digital input #1, 0 V, 0 A (NO), e.g. for a floor call button Digital input #2, 0 V, 0 A (NO), e.g. for a second floor call button Bi-stable latching relay #1, max. 24 V DC / AC, 1 A Bi-stable latching relay #2, max. 24 V DC / AC, 1 A Bi-stable latching relay #3, max. 24 V DC / AC, 1 A 15 - 48 V DC input (+, -), max. 15 W
Relays	3 x freely configurable bi-stable relays, e.g. for door openers, gate control or lift
Display	4-inch True Color LCD
Touchscreen	Yes, capacitive
Resolution	800 x 480 px
IPS	Yes
Glass	Scratch-resistant Gorilla® safety glass
Audio	Speaker and microphone Echo and noise suppression, AEC and ANR Two-way audio
Volume	HD audio, up to 102 dB
Ringtones	Over 50 ringtones
Operation	Touchscreen 5 hardware buttons for main functions Configurable RGB LED status bar
Ethernet	PoE 802.3af Mode-A
Wi-Fi	802.11 b/g/n, 2.4 GHz
Wireless modules	Wi?Fi 802.11 b/g/n, 2.4 GHz
IP features	Door opening and lift call Visitor history with free cloud recording Room-to-room communication with multiple indoor stations SIP support, e.g. for concierge or caretaker call Weather forecast Home and building automation control via IP, TCP, HTTPS and relays Configuration via the DoorBird app
System requirements	Mobile device with up-to-date iOS or Android High-speed fixed-line broadband connection via DSL, cable or fibre No SOCKS or proxy server Ethernet network with DHCP
Supported door stations	Any DoorBird IP video door station
Approvals	CE, FCC, IC, RoHS, IP50

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Weight	430 g
EAN	4260423860902
Manufacturer part number	423860902
Scope of delivery	1 x IP video indoor station 1 x mounting bracket 1 x RJ45 adapter 1 x mains power adapter 100 - 240 V AC to 15 V DC with up to 4 country adapters 1 x installation manual 1 x quick start guide with Digital Passport 1 x small parts

Notes

- The DoorBird IP Video Indoor Station A1101 White Edition is intended for indoor use.
- Connection can be via Wi-Fi or Ethernet; with Ethernet connection, power supply via PoE is also possible.
- If the internet connection fails, functions within the local network with connected DoorBird door stations remain available.
- The table stand A8003 is available separately and is not included in the scope of delivery.
- Installation must be carried out by a qualified electrician.

Dimensions

Width in mm	115
Height in mm	185
Total width in mm	115
Depth in mm	25.0
Weight in kg	0,4

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110


Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images





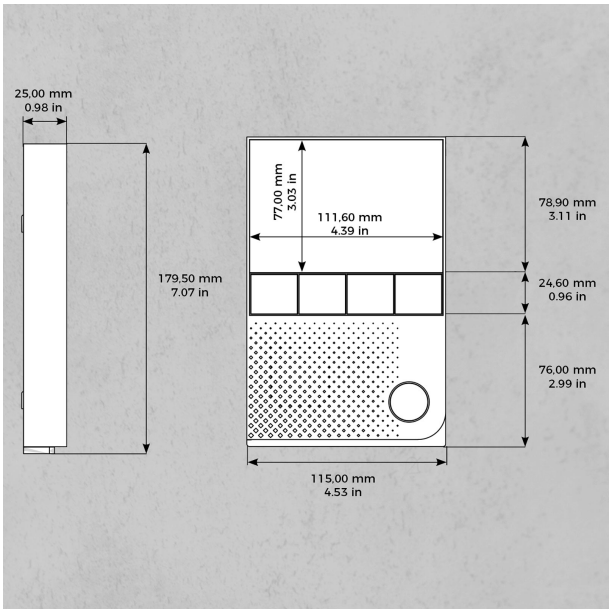

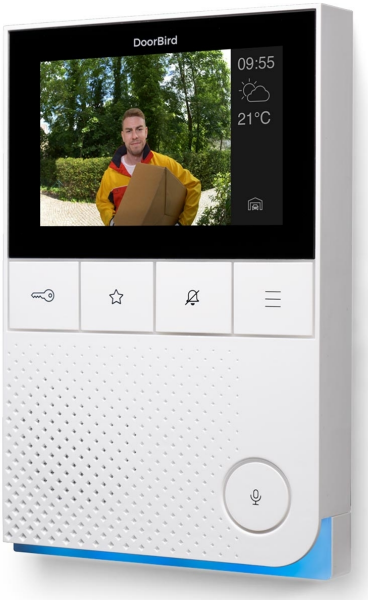

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618